




# ALUMINUM ELECTROLYTIC CAPACITORS

2022/2023

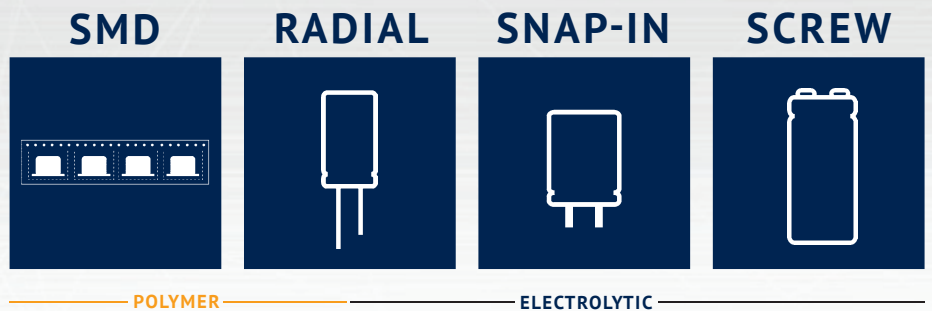

ENGINEERED SOLUTIONS

**JIANGHAI EUROPE**  
Electronic Components GmbH

# Capacitors from Jianghai

JIANGHAI EUROPE ELECTRONIC COMPONENTS GMBH IS THE EUROPEAN SALES ORGANIZATION OF NANTONG JIANGHAI CAPACITOR CO., LTD., NANTONG (CHINA). SINCE 2004, SALES, MARKETING, TECHNICAL SUPPORT, CUSTOMER SERVICE TEAM AND WAREHOUSE OF JIANGHAI EUROPE ELECTRONIC COMPONENTS GMBH ARE LOCATED IN KREFELD AND KEMPEN (GERMANY).

## » ELECTROLYTIC CAPACITORS

Jianghai has grown since its foundation in 1958 to become the largest Chinese manufacturer of aluminum capacitors generating revenues of more than 700 million USD in 2021. While Jianghai started in the beginning with the production of specialty chemicals (e.g., electrolyte solutions), it entered the production of aluminum electrolytic capacitors already in 1970.



## » INTEGRATION OF PREMATERIAL

More recently, Jianghai extended its production range by integrating high and low voltage anode foil etching and forming facilities. All factories are located in mainland China: the most important ones are in Nantong (north to Shanghai), in Inner Mongolia, and in Xi'An area. Jianghai is well prepared for further expansion due to its successful entrance to the stock market in summer 2010.

## » FILM CAPACITORS

In 2012, the product portfolio was complemented by a range of power film capacitors. For this new business unit, Jianghai also follows the strategy of vertical integration and thus the production will extend from the preparation of the plastic film to the assembly of the finished goods. The product portfolio of DC-Link and Snubber capacitors has been enlarged in the year 2016 by AC-film and Safety capacitors. Highly automated production facilities ensure the efficient mass production of film capacitor Modules. Driven by the thriving electric vehicle market in China, Jianghai has attained a leading position for the supply of these customer specific components.



## » POLYMER CAPACITORS

The year 2013 was marked by a major breakthrough in R&D for polymer aluminum electrolytic capacitors: the voltage proof for these ultra-low ESR products was pushed out to as much as 200V, enabling the utilization of these advanced capacitors in more applications, e.g. in white goods, industrial automation, telecom infrastructure, power supplies, and LED ballasts. Hybrid and

Stacked (Chip) Polymer Capacitors were added into the product portfolio in the year 2019.

## » ENERGY CAPACITORS

For energy storage applications, Jianghai has developed a range of Lithium Ion-Capacitors (Li-C) based on the well-known EDLC technology.



Li-C combine the advantage of many hundred thousand charge and discharge cycles and high energy density, allowing for a wide range of applications in energy storage and recuperation. Jianghai offers EDLC as well as Li-C in various form factors, e.g. in radial, snap-in, pouch or module shape.

## » CAPACITOR COMPETENCE CENTER

Global presence of experienced sales and technical marketing experts at offices in Europe, Asia and the Americas ensure the local support of our customers based on sound know-how in all project phases. In 2014 Jianghai Europe has established an additional service for its customers in Europe: Experts for capacitors are awaiting telephone calls or emails at the CCCenter as a kind of hotline for all kind of technical requests.

## » CUSTOMIZED PRODUCTS

Jianghai's particular strength as a volume manufacturer is to offer customized products. Jianghai focuses on the demanding professional industrial segment with many power electronics applications. Research and development in collaboration with several specialized university institutes as well as the access to all vital pre-materials enable Jianghai to create engineered, customized solutions to fit smoothly into a specific application. Jianghai is continuously improving processes, thereby enhancing the quality of its products and services. The list of certificates awarded to Jianghai reflects its level of achievement. In the year 2013, the Jianghai Europe sales office has become certified according to ISO9001 and ISO14001.

## » CONTACT

Jianghai Europe Electronic Components GmbH  
 T: +49 (21 51) 65 20 88-0 | F: +49 (21 51) 65 20 88-88  
 info@jianghai-europe.com | www.jianghai-europe.com

Portfolio: All Aluminum Electrolytic Capacitors at a glance (Radial, Snap-In, Screw)	6
Lifetime Estimation of Aluminum Electrolytic Capacitors	9
Handling Precautions for Aluminum Electrolytic Capacitors	10

## ALUMINUM ELECTROLYTIC CAPACITORS

<b>RADIAL</b> 	<b>13</b>
---	-----------

Portfolio: All Radial Type at a glance	14
Order code	15
Technical Specifications	16

### SERIES RADIAL

CD 110	PT	Radial	85°C	6,3-500V	4 000h	Standard	18
CD 11GL	GL	Radial	125°C	160-450V	6 000h	High Temperature, High Voltage	21
CD 261	LK	Radial	105°C	160-450V	14 000h	High Voltage, Long Life	23
CD 261L <b>UPDATED</b>	DE	Radial	105°C	160-450V	14 000h	Miniaturized	25
CD 261X	QX	Radial	105°C	160-550V	12 000h	High Voltage, Highest Currents	28
CD 263	BK	Radial	105°C	6,3-500V	3 000h	Standard	30
CD 269	PH	Radial	125°C	10-63V	4 000h	High Temperature	34
CD 269L	HL	Radial	125°C	10-100V	10 000h	High Temperature, Long Life	36
CD 281	LL	Radial	105°C	6,3-100V	12 000h	Low ESR, Long Life	38
CD 281L	LH	Radial	105°C	6,3-100V	12 000h	Low ESR, Longest Life	43
CD 282L	YL	Radial	105°C	6,3-100V	12 000h	High Current, Ultra Low ESR	48
CD 282X	EQ	Radial	105°C	6,3-100V	12 000h	High Current, Miniaturized	53
CD 284	XY	Radial	105°C	6,3-100V	10 000h	High Current, Ultra Low ESR	56
CD 284L	LY	Radial	105°C	6,3-100V	12 000h	Miniaturized	60
CD 285	HY	Radial	105°C	6,3-100V	12 000h	Highest Current	64
CD 287	GC	Radial	105°C	6,3-100V	10 000h	Low ESR	68
CD 28L	QL	Radial	105°C	6,3-63V	14 000h	Low ESR, Miniaturized	73

<b>SNAP-IN</b> 	<b>77</b>
--	-----------

Portfolio: All Snap-In Type at a glance	78
Order code	79
Technical Specifications	80

### SERIES SNAP-IN

CD 293	BZ	Snap-In	85°C	10-500V	4 000h	Standard	82
CD 294	BW	Snap-In	105°C	16-550V	4 000h	Standard	86
CD 295	BC	Snap-In	85°C	10-500V	6 000h	Long Life	90
CD 295S	BS	Snap-In	85°C (105°C)	160-500V	12 000h	12 000h, Enlarged Temperature	94
CD 296	KC	Snap-In	105°C	16-550V	5 000h	Long Life	96
CD 296L	FL	Snap-In	105°C	350-500V	6 000h	Large Size 105°C	100
CD 297	BB	Snap-In	105°C	10-500V	7 000h	Longer Life, High Current	102
CD 299	PG	Snap-In	105°C	160-500V	9 000h	9 000h, High Current	106
CD 29C	QC	Snap-In	105°C	200-450V	4 000h	Miniaturized 105°C	109
CD 29D	HR	Snap-In	85°C	160-450V	7 000h	Long Life, Highest Currents	111
CD 29H	QH	Snap-In	105°C	160-450V	5 000h	Long Life, Highest Currents	113
CD 29HD	QF	Snap-In	105°C	200-450V	8 000h	Outstanding Ripple Current	116
CD 29L	QL	Snap-In	85°C	16-500V	7 000h	Long Life, Large Size	118
CD 29U	CU	Snap-In	85°C	575-630V	6 000h	575V, 600V, 630V	121
CD 29UH	UT	Snap-In	105°C	575V, 600V	6 000h	575V, 600V at 105°C	123
CD 840	ZQ	Snap-In	85°C	200-450V	10 000h	10 000h High Current	125
CD 891	ZJ	Snap-In	85°C	35-500V	4 000h	Miniaturized	127
CD 892	ZL	Snap-In	105°C	400-500V	5 000h	Miniaturized, Long Life	130
CD 895	ZK	Snap-In	85°C	16-500V	14 000h	Ultra Long Life	132

## ■ SCREW 137

Portfolio: All Screw Type at a glance & Order code	138
Technical Specifications	139

### SERIES SCREW

CD 135	BP	Screw	85°C	10-500V	4 000h	Standard	141
CD 136	PK	Screw	105°C	25-450V	4 000h	Standard	144
CD 137	PX	Screw	85°C	400-550V	10 000h	Long Life, High Voltage	146
CD 137S	PR	Screw	85°C	350-500V	12 000h	Miniaturized, Prolonged Lifetime	148
CD 138	PC	Screw	85°C	350-450V	10 000h	Long Life, High Current	150
CD 138S	WP	Screw	85°C	350-500V	15 000h	Longest Life, Highest Currents	152
CD 139	BL	Screw	105°C	350-450V	9 000h	Longest Life	154
CD 139S	HC	Screw	105°C	350-450V	9 000h	Longest Life 105°C, High Current	156
CD 13H <b>UPDATED</b>	BH	Screw	85°C	600-650V	4 000h	600V, 650V	158
CD 838	ZT	Screw	85°C	350-450V	10 000h	Miniaturized, Long Life	160

## POLYMER CAPACITORS 163

Introduction, Comparison & Lifetime Estimation	164
Handling Precautions for Solid Polymer Capacitors	165
Order code for SMD Type & Technical Specifications Solid SMD Type	166
Order code for RADIAL Type & Technical Specifications Solid RADIAL Type	168

## ■ SMD 170

PC HVC	VC	SMD	105°C	2,5-25V	2 000h	Standard	170 ff.
PC HVF	VF	SMD	105°C	16-200V	3 000h	Full Voltage	170 ff.
PC HVG	VG	SMD	125°C	2,5-20V	1 000h	High Temperature	170 ff.
PC HVK	VK	SMD	125°C	16-80V	2 000h	Enlarged Voltage, 125°C	170 ff.
PC HVM	VM	SMD	105°C	2,5-16V	2 000h	Low ESR	170 ff.
PC HVS	SV	SMD	105°C	4-25V	5 000h	Long Life	170 ff.
PC HVX	VX	SMD	105°C	2,5-10V	2 000h	Ultra Low ESR	170 ff.

## ■ RADIAL 176

PC HCN	CN	Radial	105°C	2,5-25V	2 000h	Standard	176 ff.
PC HCS	CS	Radial	105°C	2,5-16V	5 000h	Longest Life	176 ff.
PC HEG	EG	Radial	105°C	16-63V	2 000h	Larger Case Sizes	176 ff.
PC HEL	EL	Radial	105°C	2,5-16V	2 000h	Ultra Low ESR	176 ff.
PC HEN	EN	Radial	105°C	2,5-25V	2 000h	Standard	176 ff.
PC HGN	GN	Radial	125°C	4-25V	1 000h	High Temperature	176 ff.
PC HPF	PF	Radial	105°C	16-200V	3 000h	Full Voltage, 125°C	176 ff.
PC HPK	PK	Radial	125°C	16-80V	2 000h	Enlarged Voltage	176 ff.
PC HPN	HN	Radial	105°C	2,5-16V	2 000h	Ultra Low ESR	176 ff.
PC HPNA	NA	Radial	105°C	2,5-16V	2 000h	Ultra Low ESR	176 ff.
PC HSN	SN	Radial	105°C	2,5-25V	2 000h	Standard	176 ff.

## ■ STACKED CHIP 183



PC HPA	PA	Stacked	105°C	2-25V	2 000h	Standard	183
PC HPS	PS	Stacked	105°C	2-10V	2 000h	Low Profile	183

## ■ HYBRID SMD & RADIAL 184


PH VA	VA	SMD	105°C	25-80V	5 000h	Standard	184
PH VB	VB	SMD	125°C	25-80V	4 000h	High Temperature	184
PH LA	LA	Radial	105°C	25-80V	5 000h	Standard	184
PH LB	LB	Radial	125°C	25-80V	4 000h	High Temperature	184

SOLID


HYBRID

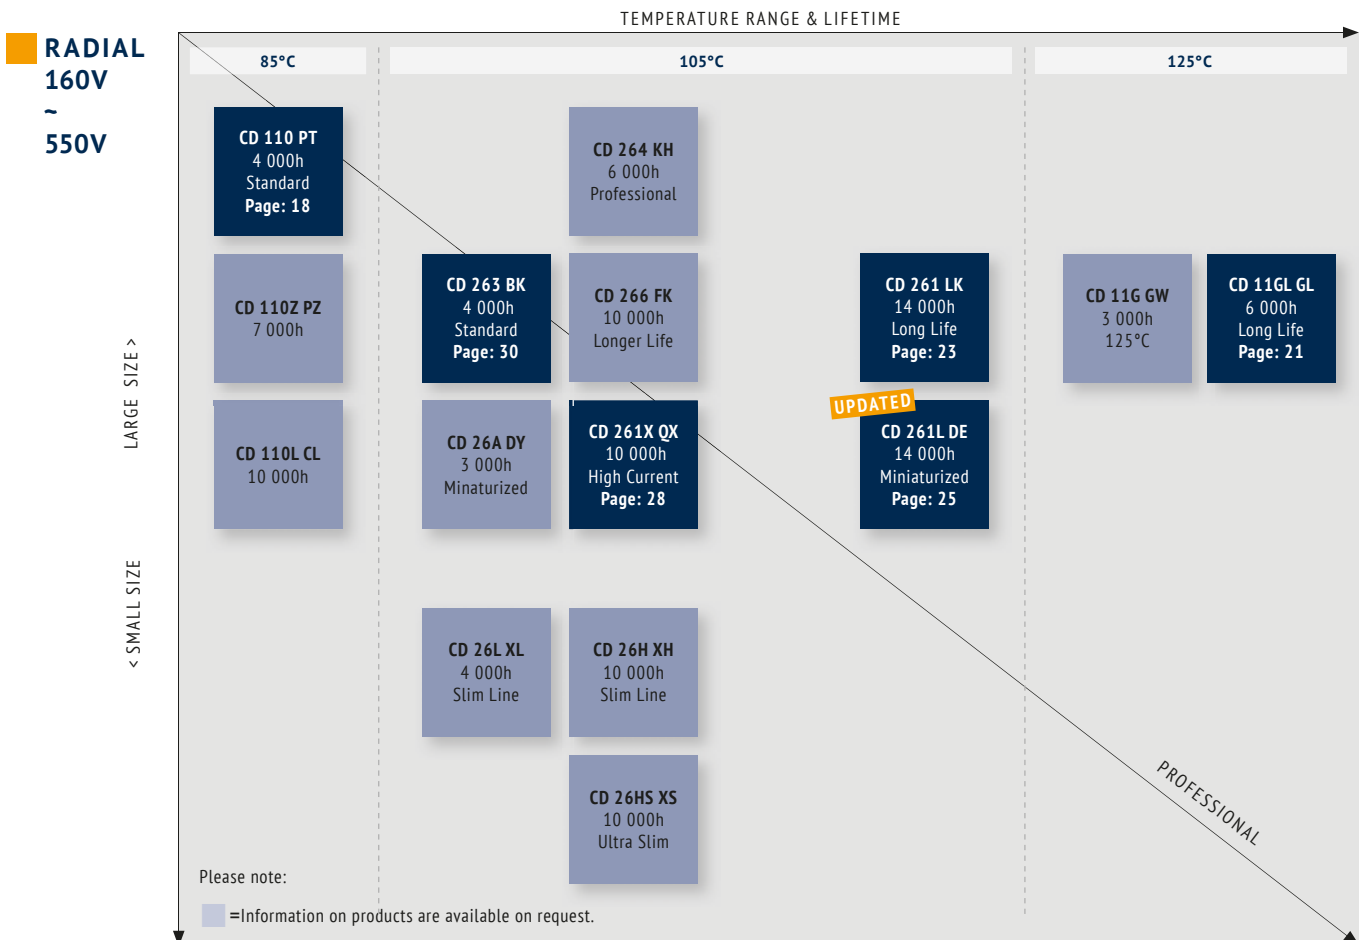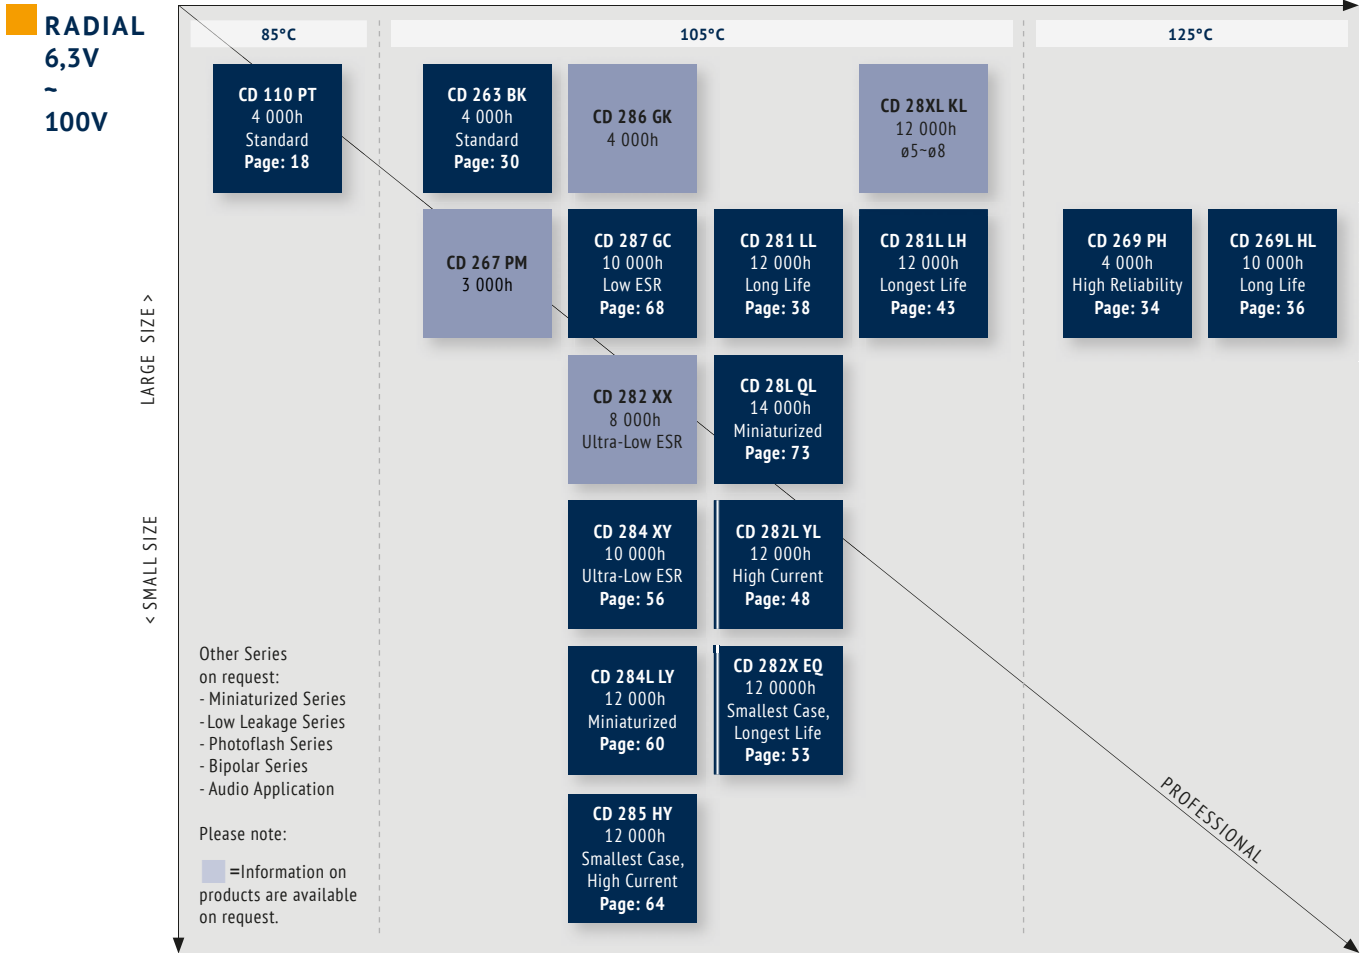


**SNAP-IN**  
85°C

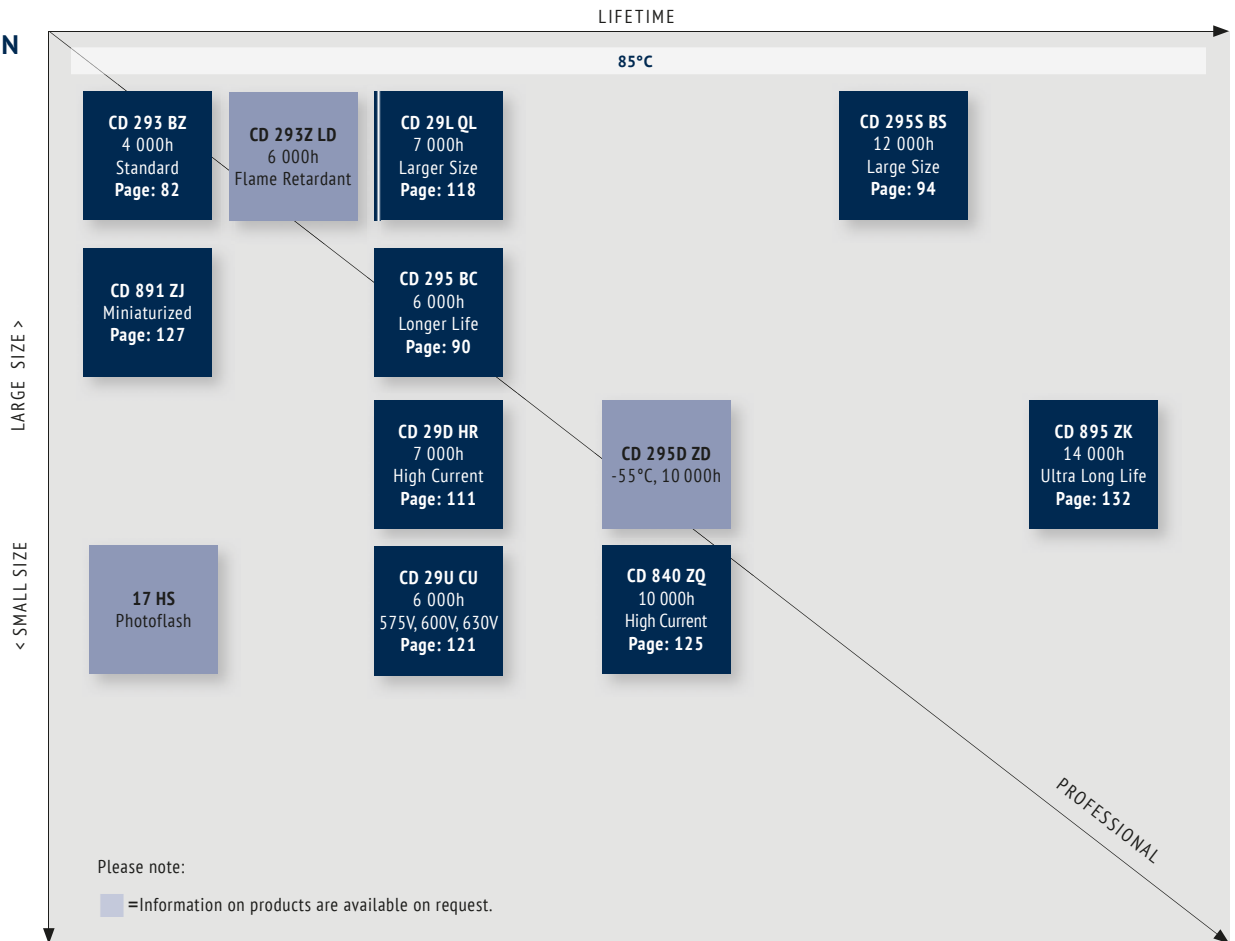

**SNAP-IN**  
105°C/  
125°C

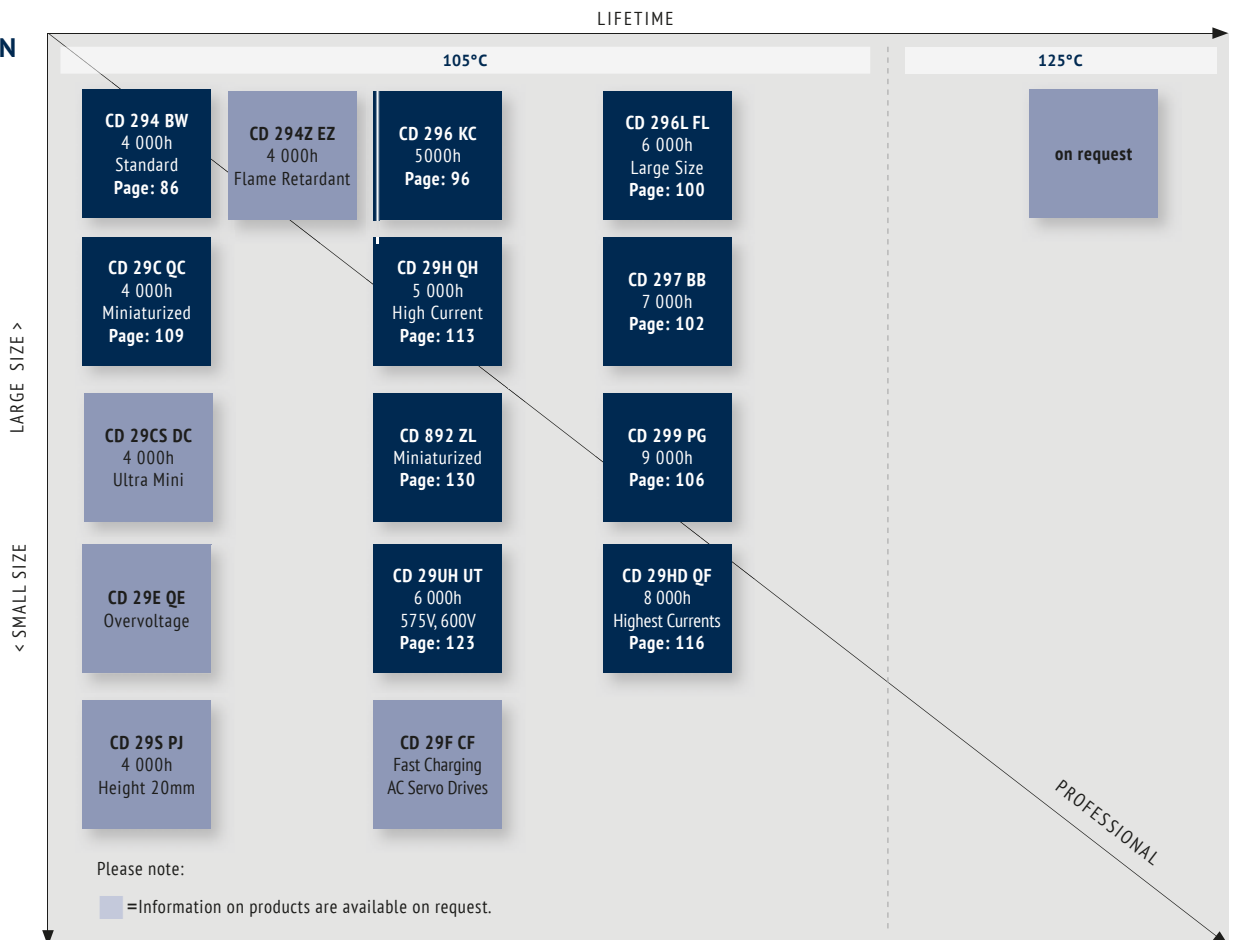

**SCREW**

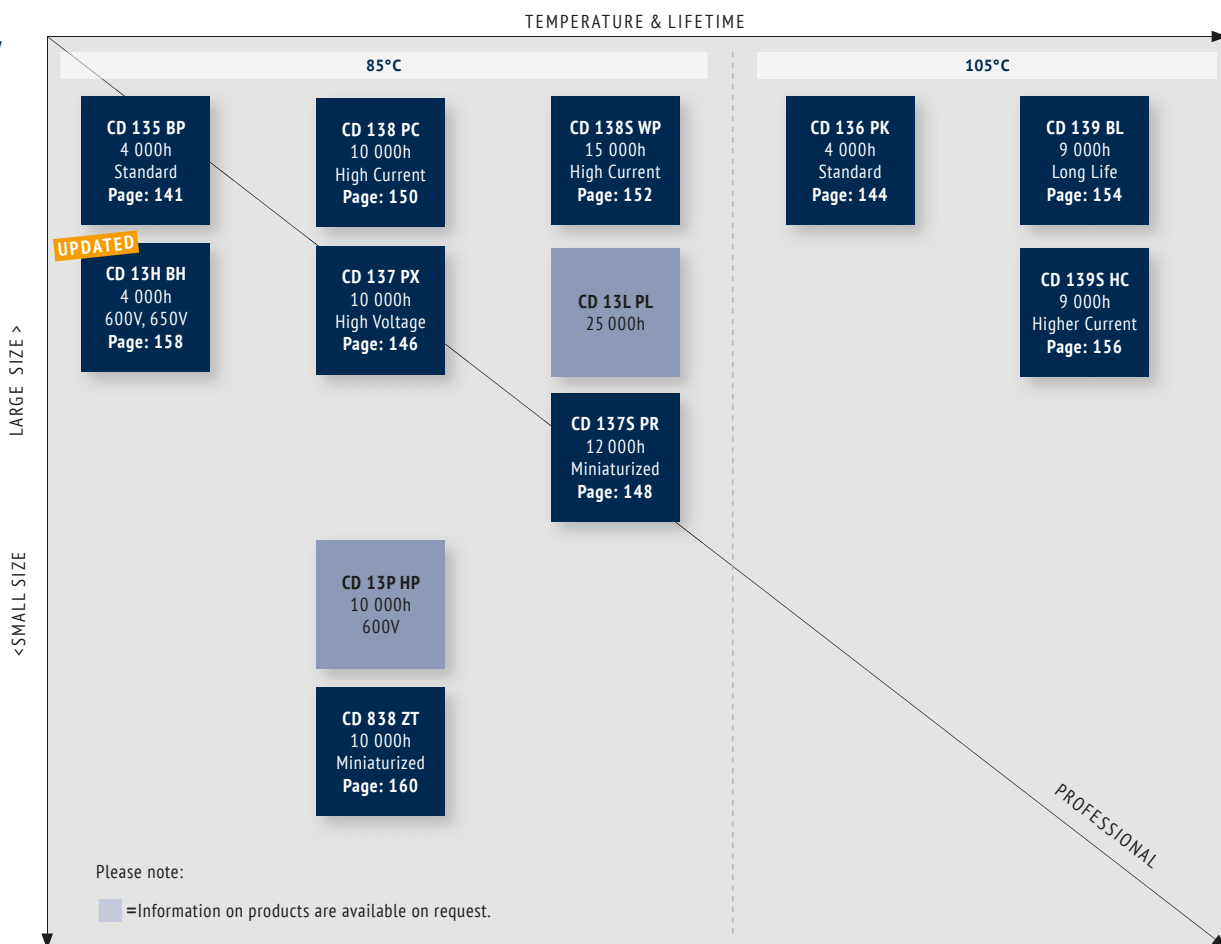

## ■ LIFETIME ESTIMATION OF ALUMINUM ELECTROLYTIC CAPACITORS FROM JIANGHAI

To estimate the Lifetime of a non-solid Aluminum Electrolytic Capacitor from Jianghai, the following formulas can be utilized. The Lifetime depends mainly on the ambient temperature, the ripple current and, within certain limits, the operating voltage applied. Other parameters may also affect the Lifetime. Moreover,  $L_0$  can be interpreted in many different ways, which has a fundamental influence on the numerical result. Jianghai offers a high transparency by publishing the different typical definitions of Lifetimes in each datasheet. Lifetime estimations are approximations by nature. Please let JIANGHAI EUROPE confirm any result before using it. The formulas given here do not constitute part of a contract nor of a specification. The formulas do not cover additional aging effects of certain electrolytic systems or other chemical effects. Also the dimensions of the components may have an effect. Forced cooling or other additional cooling-methods have a strong impact on the Lifetime and are not covered by the formulas as defined. For the estimation and interpretation of Lifetime, a close collaboration with JIANGHAI EUROPE is strongly advised.

### STRUCTURAL FORMULA

$$L = L_0 \cdot K_T \cdot K_R \cdot K_V$$

WHERE:

- L Total Lifetime
- $L_0$  Lifetime under Nominal Load at Upper Category Temperature (see catalogue)
- $K_T$  Temperature Factor
- $K_R$  Ripple Current Factor
- $K_V$  Voltage Factor

### $K_T$ TEMPERATURE FACTOR

Aluminum Electrolytic Capacitors follow roughly the 10 K rule of Arrhenius. It is possible to estimate the Lifetime by rule of thumb: When the operational temperature is reduced by 10 K, the Lifetime will double. The formula for  $K_T$  in detail is:

$$K_T = 2^{\frac{T_0 - T_A}{10K}}$$

WHERE:

- $T_0$  Rated Temperature
- $T_A$  Ambient Temperature

### $K_R$ RIPPLE CURRENT FACTOR

To estimate the influence of ripple current on lifetime, Jianghai uses a safety factor  $K_i$ . Under certain conditions this value can be set to  $K_i=2$ , which is prolonging the lifetime. Please contact Jianghai Europe for details and approval.

$$K_R = K_i^A \frac{\Delta T_0}{10K}$$

WITH:

$$A = 1 - \left( \frac{I_A}{I_R} \right)^2$$

WHERE:

- $I_A$  Actual Rated Ripple Current
- $I_R$  Ripple Current at Upper Category Temperature (databook value)
- $\Delta T_0$  Core Temperature Rise of the capacitor (typically 3,5 ~ 5 K for  $T_0 = 105^\circ\text{C}$  and 3,5 ~ 10K for  $T_0 = 85^\circ\text{C}$ , see databook value)
- $K_i$  Basis, typically defined as
 

$T_0 = 105^\circ\text{C}$	$I_A > I_R$ :	$K_i = 4$
	$I_A \leq I_R$ :	$K_i = 2$
$T_0 = 85^\circ\text{C}$		$K_i = 2$

**!** Remark: Safety Factor  $K_i$  may be set as  $K_i=2$  under certain defined conditions. Please contact Jianghai Europe for approval.

### $K_V$ VOLTAGE FACTOR

For Radial Electrolytic Capacitors, this part of the formula has no impact ( $K_V = 1$ ). But for some bigger capacitors like Snap-In and Screw-Terminal types with rated voltages above 160V, the operating voltage will affect their Lifetime. It is expressed as follows:

FOR:

$$0,6 \leq \frac{U_A}{U_R} \leq 1$$

$$K_V = \left( \frac{U_A}{U_R} \right)^{-2,5}$$

WHERE:

- $U_A$  Actual Operating Voltage
- $U_R$  Rated Voltage



FOR:

$$0 < \frac{U_A}{U_R} < 0,6$$

$$K_V = 3,59$$

FOR:

$$\frac{U_A}{U_R} > 1 \text{ not allowed}$$

$$K_V = 1$$

FOR: Radial Capacitors or  $U_R \leq 160V$

$$K_V = 1$$

**FREQUENCY CORRECTION FACTORS:**

If the actual Ripple Currents are not given at the same frequency like  $I_0$ , correction factors need to be applied.

$$I_A = \sqrt{\left(\frac{I_{f1}}{F_{f1}}\right)^2 + \left(\frac{I_{f2}}{F_{f2}}\right)^2 + \dots + \left(\frac{I_{fn}}{F_{fn}}\right)^2}$$

**JIANGHAI ELECTROLYTIC CAPACITOR LIFETIME ESTIMATION FORMULA (incl. Safety Factors):**

$$L = L_0 \cdot 2^{\frac{T_0 - T_A}{10K}} \cdot K_i \left[ 1 - \left(\frac{I_A}{I_R}\right)^2 \right]^{\frac{\Delta T_0}{10K}} \cdot \underbrace{\left(\frac{U_A}{U_R}\right)^{-n}}_{K_V}$$

WITH TYPICAL VALUES:

$T_0 = 105^\circ C$       $I_A > I_R$  :  $K_i = 4$

$I_A \leq I_R$  :  $K_i = 2$

$T_0 = 85^\circ C$       $K_i = 2$

$\Delta T_0 =$  depending on the series: 3,5~10K,  
see databook value

$$0,6 \leq \frac{U_A}{U_R} \leq 1 \rightarrow n = 2,5$$

$$0 < \frac{U_A}{U_R} < 0,6 \rightarrow K_V = \left(\frac{U_A}{U_R}\right)^{-n} = 3,59$$

For  $U_R \leq 160V$ , Radial and

$$\frac{U_A}{U_R} > 1 \rightarrow K_V = 1$$

**HANDLING PRECAUTIONS FOR ALUMINUM ELECTROLYTIC CAPACITORS FROM JIANGHAI**

**WARNING**

JIANGHAI is not liable for any extent of possible injuries or damages to persons or things, of any kind, caused by the improper application of and/or operating conditions harmful to electrolytic capacitors. Misapplications which may cause failures include, but are not limited to: ripple current or peak current or voltage above specification, operating voltage above surge voltage specified, temperature exposure outside the specified operating temperature range. Examples of harmful operating conditions comprise, but are not limited to: unusual storage or transport temperatures, excessive and/or rapid changes of ambient temperature or humidity, heavy mechanical shock or vibration, corrosive and abrasive particles in the ambient (cooling) air, conducting dust in the ambient (cooling) air, oil or water vapor or corrosive substances, explosive gas or dust, operation under extremely high or low ambient pressure conditions (below or above sea level), superimposed radio frequency voltages, radioactivity. In case of doubt about the impact of operating conditions on capacitor performance, please contact JIANGHAI.

**PERSONAL SAFETY**

Electrical or mechanical misapplication of electrolytic capacitors may be hazardous. Personal injury or property damage may result from explosion of a capacitor or from the expulsion of electrolyte due to mechanical disruption or the release of a safety vent of a capacitor. In case of injury or skin or eye exposure to electrolyte, immediately seek professional medical advice. Before using electrolytic capacitors in any application, please read these Handling Precautions, familiarizing thoroughly with the information contained herein. Please check before using any of our electrolytic capacitors if these components fulfill the requirements of your application and that warnings and instructions for use are followed.

**WARRANTY**

The information contained in this catalogue does not form part of any quotation or contract, is believed to be accurate, reliable and up to date. Quality data are based on the statistical evaluations of a large quantity of parts and do not constitute a guarantee in a legal sense. However, agreement on these specifications does mean that the customer may claim for replacement of individual defective capacitors within the terms of delivery. We will not assume any liability beyond the replacement of defective components. This applies in particular to any consequential damage caused by component failure. Furthermore it must be taken into consideration that the figures stated for lifetime, failure rates and outlier percentages refer to the average production status and are therefore to be understood as mean values (statistic expectations) for a large number of delivery lots of identical capacitors. These figures are based on application experience and data obtained from preceding tests under normal conditions, or – for purpose of accelerated aging – more severe conditions. JIANGHAI reserves the right to change these specifications without prior notice. Any application information given is advisory and does not form part of any specification. The products are not primarily designed for use in life support applications, devices or systems where malfunction of these products can reasonably be expected to result in personal injury. JIANGHAI customers using or selling these products for use in such applications without prior written consent of JIANGHAI do so at their own risk and agree fully to indemnify JIANGHAI for any damage resulting from such improper use or sale. This version of the catalogue supersedes all previous versions. Latest versions of datasheets can be found on our homepage: [www.jianghai-europe.com](http://www.jianghai-europe.com). For more details on precautions and guidelines for aluminum electrolytic capacitors, please refer to CENELEC Technical Report CLC/TR 50454:2008 E, "Guide for the application of aluminum electrolytic capacitors".

**POLARITY**

Electrolytic capacitors are polar and shall never be used with incorrect polarity, as there is a possible danger of shorting or destruction.

**RATED VOLTAGE  $U_R$**

The rated voltage is marked on the capacitor and defined in the datasheets as  $U_R$ . This voltage should never be exceeded and is the maximum peak voltage including any ripple voltages allowed to avoid a shortening of the lifetime or damage of the capacitor. When a ripple current is applied to the capacitor, the sum of the peak ripple voltage and bias DC voltage shall never exceed the rated voltage. It might be necessary to lower the maximum allowed bias DC voltage, when certain ripple currents are applied to the capacitor.

**SURGE VOLTAGE**

Maximum voltage, which may be applied to the capacitor for short periods of time: max. 1000 cycles of 30 sec. per 6 min., max. 5 pulses per hour. Capacitance drift +/- 15% max.

**REVERSE VOLTAGE**

Reverse voltages or voltages < 0V are not allowed.



## RECOVERY VOLTAGE

Electric potential between the positive and negative terminal may exist as a result of dielectric absorption. Please take action that this load does not damage other devices or scare workers during the production process (sparks possible). If needed please discharge the capacitor through a 1kΩ resistor.

## TEMPERATURE RANGE

Use electrolytic capacitors only within the specified operating temperature range.

## OVER-CURRENT

Currents exceeding the rated ripple currents should be avoided.

## RIPPLE CURRENT/VOLTAGE

The combined value of DC voltage and peak AC voltage (due to ripple current) shall not exceed the rated voltage and shall never be < 0V. Use of aluminum electrolytic capacitors under ripple current with wide amplitudes is equivalent to rapid charge-discharge operation.

## RAPID CHARGING/DISCHARGING

Rapid charging/discharging generates severe heat and gas may be emitted which may lead to explosion. Consult JIANGHAI about specially designed capacitors suitable for such kind of applications. Example: Servo Drive Application

## BALANCING RESISTORS

Balancing resistors should be utilized if capacitors are used in serial connection. Please choose low-tolerance resistors to limit voltage drift.

## CHARGE-DISCHARGE PROOF

JIANGHAI capacitors are charge-discharge proof, which means that 10<sup>6</sup> switching cycles will cause capacitance reduction of less than 10%.

## LIFETIME

There are many different lifetime definitions known without any true standard definition. Take special care when capacitors are compared that the capacitors fulfill the needed requirements. JIANGHAI publishes all conditions to be as transparent as possible. In the case of lifetime tests with additional ripple currents, the bias DC voltage must be reduced, so that the sum of bias DC voltage and the peak of the ripple voltage does not exceed the Rated Voltage U<sub>R</sub>.

**Load life:** Period of time, during which the technical parameters of all capacitors stay within the given limits. JIANGHAI defines this without allowing for outliers.

**Useful life:** Defined like load life, but with a larger range of parameter change.

**Endurance test:** IEC 60384-4 defines the acceptable drift criteria of electrical parameters after the endurance tests (continuous voltage test).

**Shelf Life:** Definition of time with acceptable drift of capacitor parameters after storage at upper category temperature without load.

## VIBRATION AND MECHANICAL STRESS

Capacitors are sensitive to vibration and mechanical forces applied on the leads. Do not use capacitors, which have been dropped onto a rigid surface.

## INSULATION

If any defect of the sleeve is visible, the component should not be used – the same holds for any kind of visible damage. A capacitor should be electrically isolated from the following parts: aluminum case, cathode lead wire, anode lead wire and circuit pattern, and auxiliary terminal of snap-in type. The sleeve is not recognized as an isolator and therefore the standard capacitor should not be used in a place where insulation function is needed. Please contact JIANGHAI if a higher grade of insulation is required.

## ENVIRONMENTAL CONDITIONS

Avoid direct contact with water, salt solution, oil, dewing conditions. Halogens generally, especially fumigation treatment with bromides and flame retardant agents containing halogens must be avoided. Avoid exposing to direct sunshine, ozone, ultraviolet rays and x-ray radiation. Air Pressure: Max. 150kPa, min. 8kPa. For usage >2000m altitude above sea level current deratings might be necessary. No heavy air pressure changes are allowed. Do not use or store in an environment containing any hazardous gas (e.g., hydrogen sulphide, sulphurous acid, nitrous acid, chlorine, ammonia, bromine, methyl bromide, other halogens) or acidic or alkaline solutions.

## STORAGE

Temperature 5 to 35°C, relative humidity below 75%. Electrolytic capacitors may accumulate charge naturally during storage. In this case discharge through a 1kΩ resistor before use (Recovery voltage). Leakage current may be increased after long storage time. In this case the capacitor should be subjected to the rated voltage treatment through a 1kΩ resistor before use for 1 hour, then it should be discharged through a resistor of about 1 Ohm/Volt. Storage times above 1 year should be avoided or rated

voltage treatment may be necessary. In accordance to IEC 60384-4 electrolytic capacitors are subject to a reforming process before acceptance testing. Rated voltage is applied via a series resistance (100Ω: U<sub>R</sub> ≤ 100VDC, 1kΩ: U<sub>R</sub> > 100VDC).

## SOLDERING

Soldering conditions (temperature, times) should be within specified conditions, especially for SMD components. Avoid high soldering temperatures as this may reduce lifetime or damage the capacitor. Do never dip the capacitor body into molten solder. Flux should not be adhered to the capacitor's body but only to its terminals. For details and different methods please contact us.

## GLUEING, CLEANING AND COATING

Do not use fixing agents or cleaning substances containing halogens. Do not use coating and moulding components that completely seal the capacitor from the environment. Also, never use solvents containing: halogenated hydrocarbons, alkali, petroleum, trichloroethylene/-ethane, xylene, acetones, trichlorotrifluoroethane, tetrachloroethylene, methylenechloride, chloroform, acetates, ketones, esters, chlorides and bromides.

## MOUNTING

Other devices, which are mounted near the capacitor, should not touch the capacitor. Additional heat coming from other components near the capacitor may reduce the lifetime of the capacitor. Do never bend or twist the capacitor after soldering to avoid stress on the leads. Radial capacitors are not protected against mechanical forces on the leads. Forces on the pins might damage the capacitor. No printed circuit board tracks are allowed between the lead pads of the capacitor. Screw Terminal capacitors should only be mounted in an upright position.

## TRANSPORT

Avoid fumigation and spraying insecticides (especially with bromides) in the import or export procedures which can cause corrosion. This applies also to the finished devices.

## MAINTENANCE

Periodical inspection should be carried out for the capacitor: visual inspection to check pressure relief open or leakage of electrolyte, electrical characteristics as leakage current, capacitance, and dissipation factor.

## ELECTROLYTE AND SEPARATOR PAPER

Electrolyte and separator paper used in aluminum capacitors may be flammable. Also, electrolyte is electrically conductive. Therefore, in case electrolyte gets in contact with PC board it may cause corrosion of circuit pattern or cause short circuit between patterns, and may lead to smoke generation or ignition in worst case.

## CAUTION DURING USE OF CAPACITORS

Do not touch the terminals of capacitors. Keep the capacitor free from conductive solution, such as acids, alkali and so on. Ensure that the operating environment of the equipment into which the capacitor has been built is within the specified conditions mentioned in the catalogue or specification sheets.

## SAFETY VENT

The safety vent needs some free space to open properly. Allow for free headroom of at least 2mm for diameter ≤16mm, more than 3mm for diameter 18-35mm, more than 5mm for case diameter 40mm and larger.

## EMERGENCY ACTIONS

When the pressure relief vent is open and some gas blows out from the capacitor, please turn the main switch of the equipment off or pull out the plug from the power outlet immediately. During safety vent operation, extremely hot gas (>100°C) may blow out of the capacitors. Do not stand close to the capacitors. In case of eye contact, rinse the open eye(s) with clean water immediately. In case of ingestion, gargle with water immediately, do not swallow. Do not touch electrolyte but wash skin with soap and water in case of skin contact.

## DEFINITION OF ELECTRICAL PARAMETERS

Separate documents as application notes, equivalent circuit diagrams and so on are available on request.

## PACKAGING

Please refer to the data book for details. Further information is available on request.

## DISPOSAL

Scrapped capacitors are classified as scrapped metal. For disposal they are handled as controllable industrial waste because of the nature of the contents (electrolyte). Most of the material is aluminum and cannot be completely burned.


*Jianghai Europe Electronic Components GmbH*

*VERSION 10/2021*

In addition to Electrolytic and Polymer Capacitors our product and catalogue portfolio includes Film Capacitors and Energy Capacitors:




Complementary you will find numerous advanced Technical Papers and Technical Memos on our website: [www.jianghai-europe.com](http://www.jianghai-europe.com)

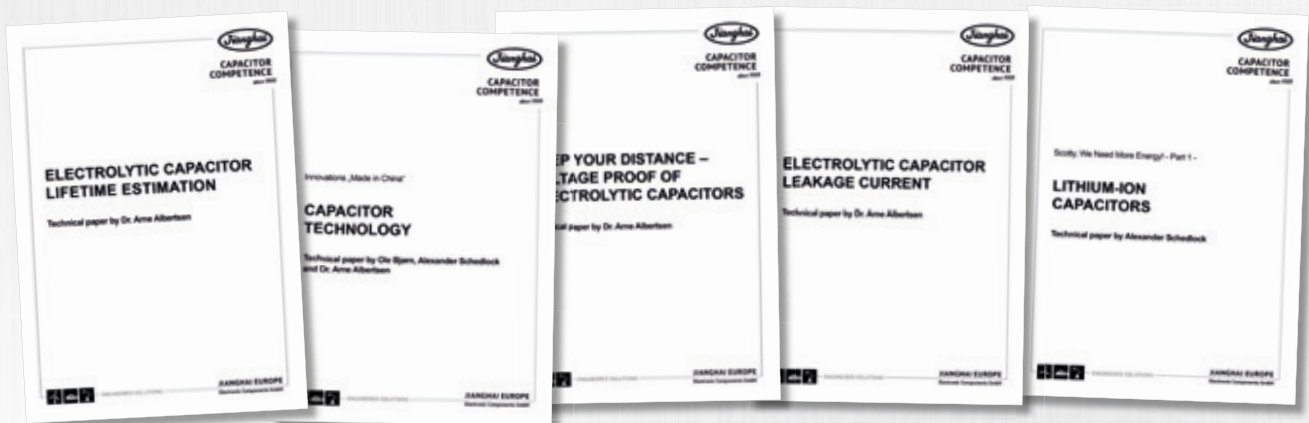

If you need further information please contact

[info@jianghai-europe.com](mailto:info@jianghai-europe.com)

We look forward to hearing from you!



# ELECTROLYTIC CAPACITORS

*Radial Type*


RADIAL

## OVERVIEW RADIAL


All Radial Type at a glance	14
Order code	15
Technical Specifications	16

SERIES RADIAL	Code	Type	Temperature	Voltage	Lifetime	Info	
CD 110	PT	Radial	85°C	6,3-500V	4 000h	Standard	18
CD 11GL	GL	Radial	125°C	160-450V	6 000h	High Temperature, High Voltage	21
CD 261	LK	Radial	105°C	160-450V	14 000h	High Voltage, Long Life	23
CD 261L	UPDATED DE	Radial	105°C	160-450V	14 000h	Miniaturized	25
CD 261X	QX	Radial	105°C	160-550V	12 000h	High Voltage, Highest Currents	28
CD 263	BK	Radial	105°C	6,3-500V	3 000h	Standard	30
CD 269	PH	Radial	125°C	10-63V	4 000h	High Temperature	34
CD 269L	HL	Radial	125°C	10-100V	10 000h	High Temperature, Long Life	36
CD 281	LL	Radial	105°C	6,3-100V	12 000h	Low ESR, Long Life	38
CD 281L	LH	Radial	105°C	6,3-100V	12 000h	Low ESR, Longest Life	43
CD 282L	YL	Radial	105°C	6,3-100V	12 000h	High Current, Ultra Low ESR	48
CD 282X	EQ	Radial	105°C	6,3-100V	12 000h	High Current, Miniaturized	53
CD 284	XY	Radial	105°C	6,3-100V	10 000h	High Current, Ultra Low ESR	56
CD 284L	LY	Radial	105°C	6,3-100V	12 000h	Miniaturized	60
CD 285	HY	Radial	105°C	6,3-100V	12 000h	Highest Current	64
CD 287	GC	Radial	105°C	6,3-100V	10 000h	Low ESR	68
CD 28L	QL	Radial	105°C	6,3-63V	14 000h	Low ESR, Miniaturized	73

**RADIAL 6,3V ~ 100V**

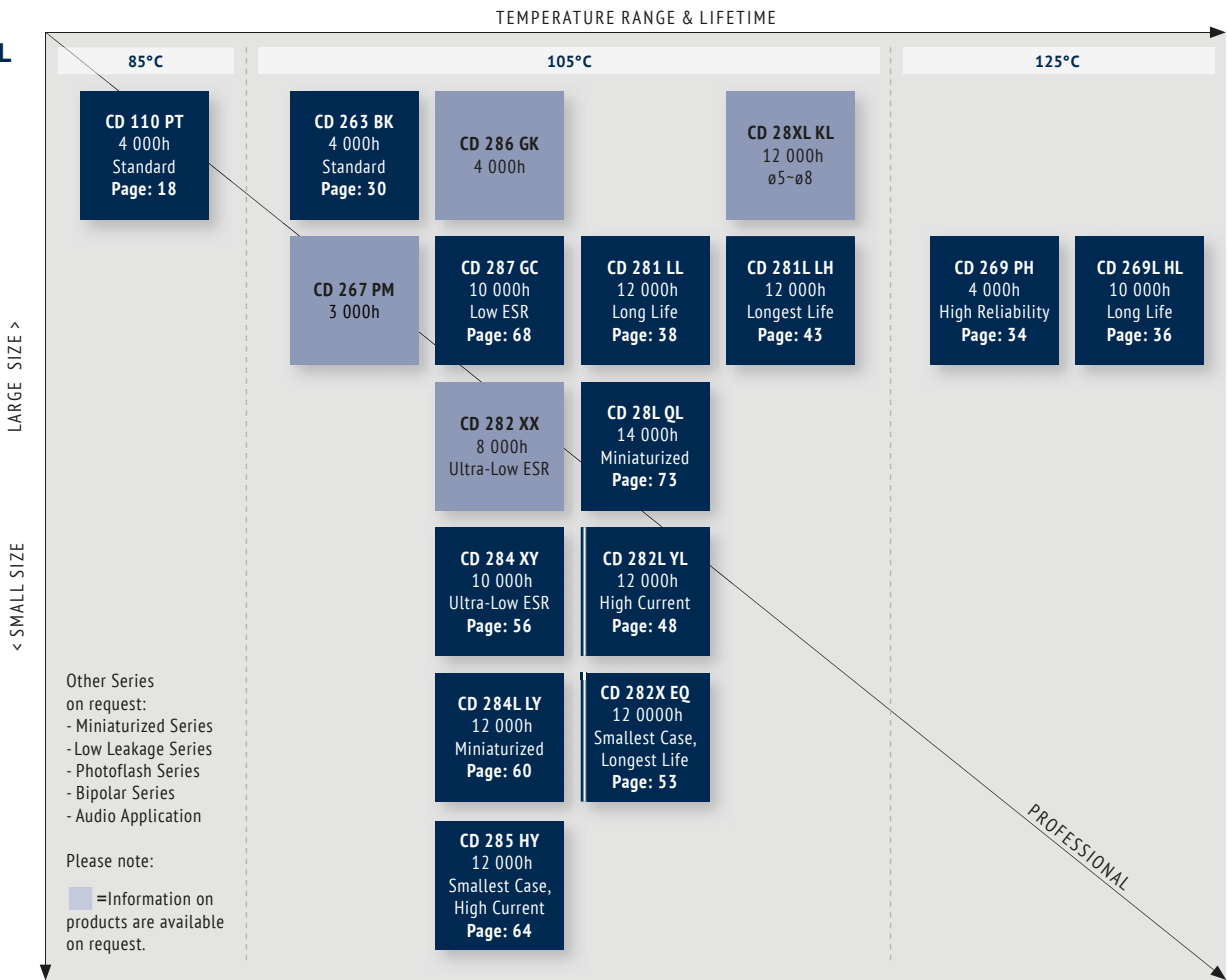

**RADIAL 160V ~ 550V**

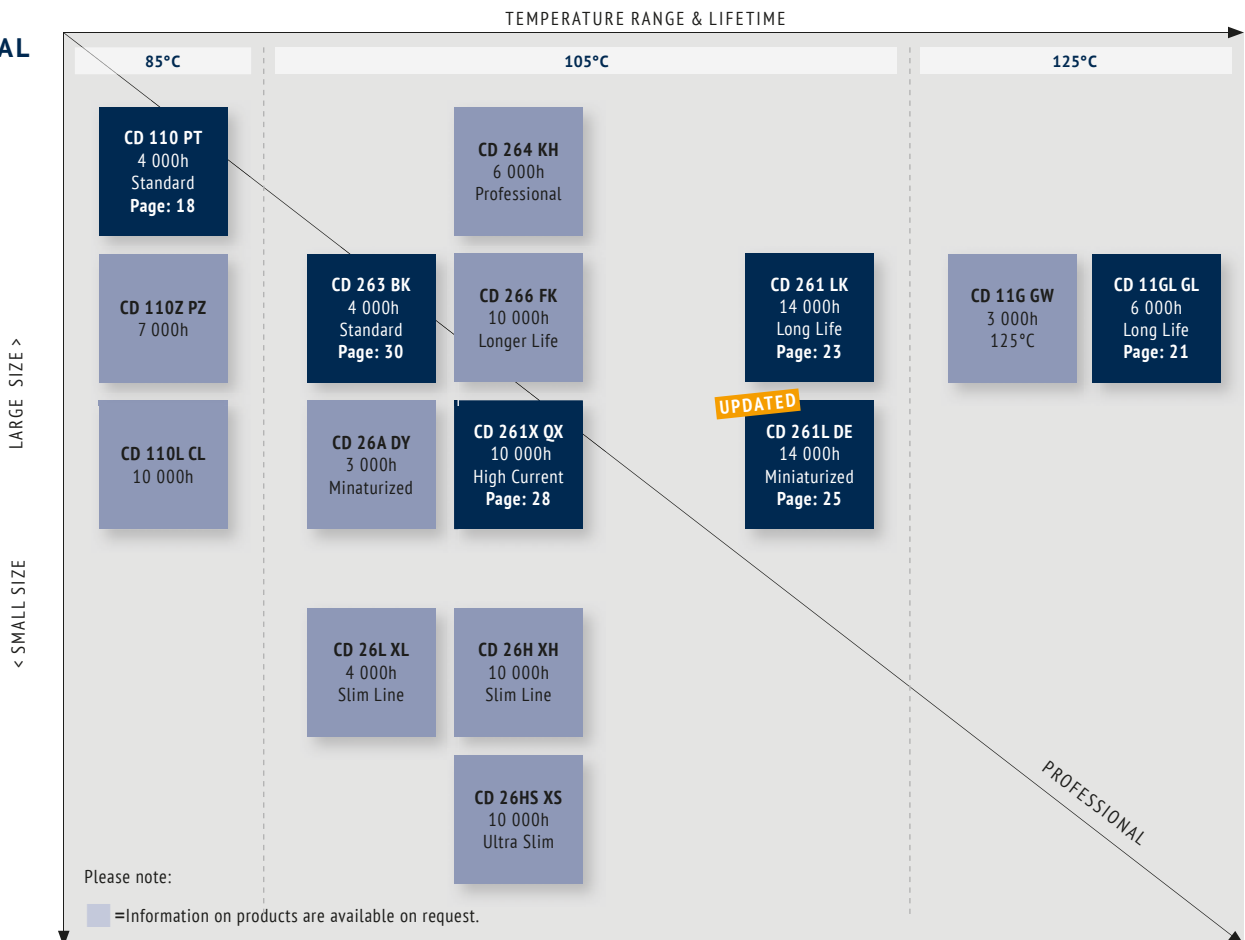

**ORDER CODE FOR RADIAL CAPACITORS**


EC	R	2G	QX	221	M	LL	50	1012	-	-	JExxxx
Technology	Terminal Type	Rated Voltage Code	Series Code	Capacitance Code	Capacitance Tolerance	Terminal Style	Terminal / Pitch	Dimension (mm)	Material Code	Rubber Type	for Specials only
EC Electrolytic Capacitor	Radial <b>R</b>	6,3V <b>0J</b>	CD 110 <b>PT</b>	0,1 <b>0R1</b>	<b>±20%</b> <b>M</b>	Taped <b>FF</b>	2,0mm <b>20</b>	4x7 <b>0407</b>	Standard -	Standard -	
		10V <b>1A</b>	CD 11GL <b>GL</b>	0,47 <b>R47</b>	±10% <b>K</b>	Long Lead <b>LL</b>	2,5mm <b>25</b>	5x11,5 <b>0511</b>	PVC <b>V</b>	Flat Rubber <b>F</b>	
		16V <b>1C</b>	CD 261 <b>LK</b>	1,0 <b>010</b>	+30 / -10% <b>Q</b>	Cut 5,0mm <b>CB</b>	3,5mm <b>35</b>	10x20 <b>1020</b>	PET <b>E</b>	Stand-Off <b>S</b>	
		20V <b>1D</b>	CD 261L <b>DE</b>	2,2 <b>2R2</b>	+20 / -0% <b>R</b>	Cut 4,5mm <b>CC</b>	5,0mm <b>50</b>	12,5x25 <b>1225</b>			
		25V <b>1E</b>	CD 261X <b>QX</b>	100 <b>101</b>	±15% <b>L</b>	Cut 4,0mm <b>CD</b>	7,5mm <b>75</b>				
		35V <b>1V</b>	CD 263 <b>BK</b>	1000 <b>102</b>	+20 / -10% <b>V</b>	Cut 3,5mm <b>CE</b>	10,0mm <b>10</b>				
		40V <b>1G</b>	CD 269 <b>PH</b>	10 000 <b>103</b>	<b>■ = preferred</b>	Cut 3,0mm <b>CF</b>	12,5mm <b>12</b>				
		50V <b>1H</b>	CD 269L <b>HL</b>								
		63V <b>1J</b>	CD 281 <b>LL</b>								
		80V <b>1K</b>	CD 281L <b>LH</b>								
		100V <b>2A</b>	CD 282L <b>YL</b>								
		125V <b>2B</b>	CD 282X <b>EQ</b>								
		160V <b>2C</b>	CD 284 <b>XY</b>								
		180V <b>2K</b>	CD 284L <b>LY</b>								
		200V <b>2D</b>	CD 285 <b>HY</b>								
		250V <b>2E</b>	CD 287 <b>GC</b>								
		350V <b>2V</b>	CD 28L <b>QL</b>								
		385V <b>2J</b>									
		400V <b>2G</b>									
		415V <b>2P</b>									
		420V <b>2X</b>									
450V <b>2W</b>											
500V <b>2H</b>											
550V <b>2Y</b>											
575V <b>2Z</b>											
600V <b>2S</b>											
630V <b>J2</b>											

On request:  
Alternative lead forms  
(keyed polarity, 90° bended, others)

Packaging:  
Taped: ammopack  
Long lead & cut: bulk

## DIMENSIONS FOR LOOSE, LONG-LEAD TYPE (BULK)

· ORDER CODE: LL

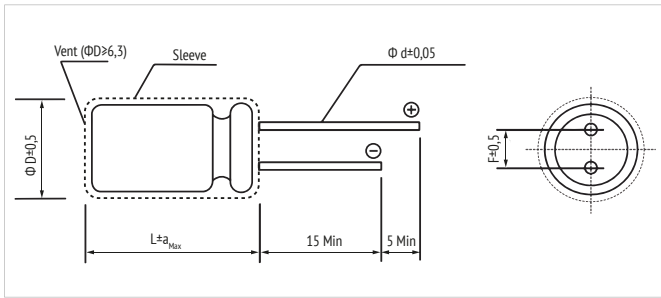

L	L ≤ 7						L ≥ 11								
	3	4	5	6,3	8	5	6,3	8	10	12,5	16	18	20	22	25
Ø D	3	4	5	6,3	8	5	6,3	8	10	12,5	16	18	20	22	25
F	1,0	1,5	2,0	2,5	3,5	2,0	2,5	3,5	5,0	7,5			10,0	12,5	
Ø d	0,4	0,45		0,5		0,6		0,8		1,0					
a <sub>Max</sub>	1,0			2,0			2,5								


For diameter 20 pitch 7,5 or 10.

in mm


## DIMENSIONS FOR LOOSE, SHORT CUT LEADS (BULK)

· ORDER CODE: CC (CB, CD, CE, CF)

### STRAIGHT LEAD

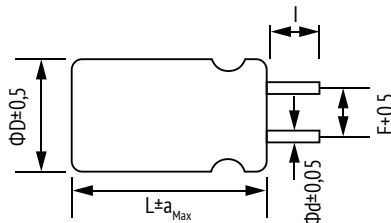

### BENDED LEAD

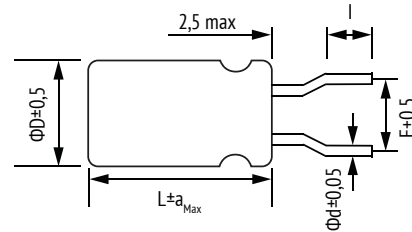


Code	CB	CC	CD	CE	CF
I	5,0 ± 0,5	4,5 ± 0,5	4,0 ± 0,5	3,5 ± 0,5	3,0 ± 0,5

■ = preferred


in mm

## EXAMPLE OF ALTERNATIVE BENDINGS

· ORDER CODE: WS

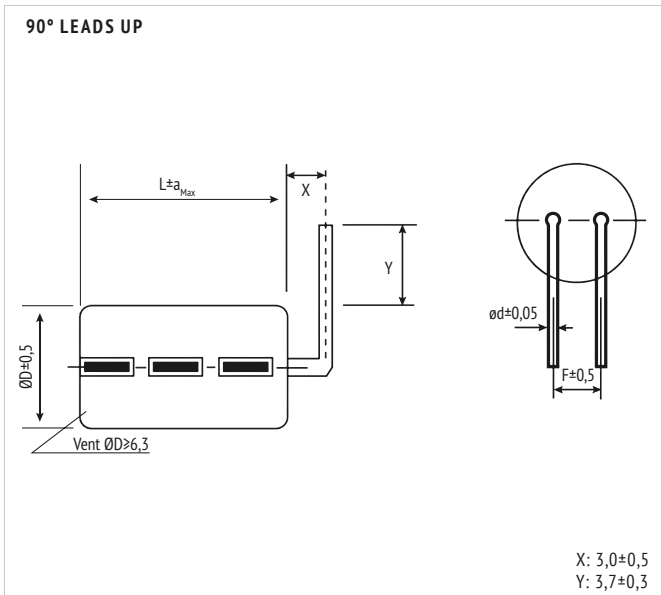






· ORDER CODE: WX

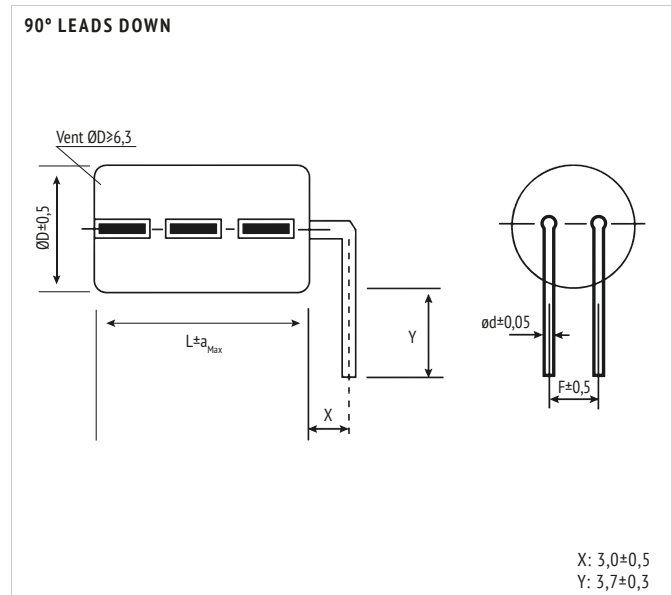



## DIMENSIONS FOR AMMOPACK TAPING FOR ELECTROLYTIC CAPACITORS

· ORDER CODE: FF (FD)

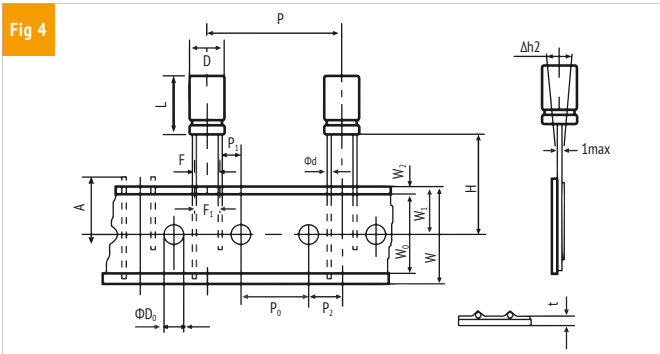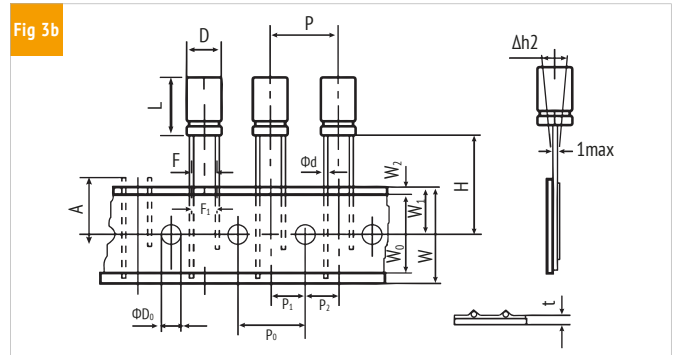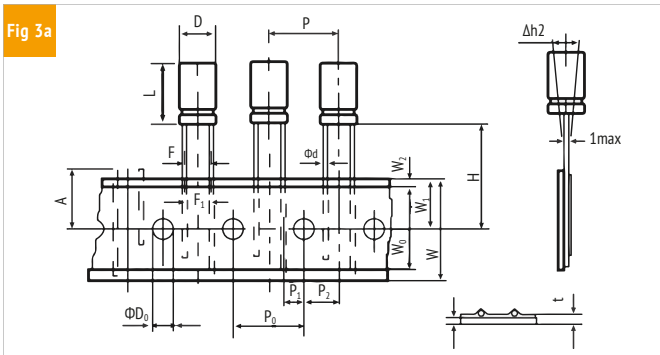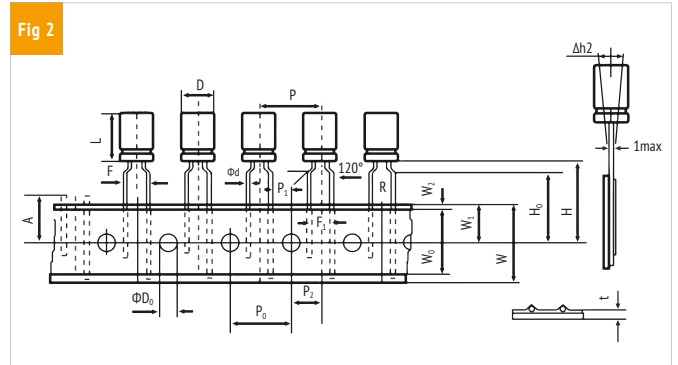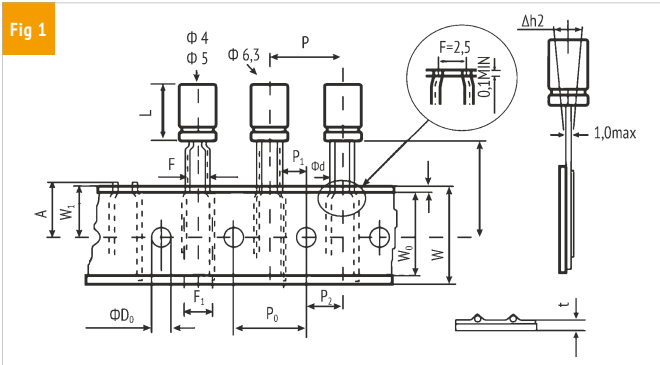

OTHER TAPING STYLES AVAILABLE ON REQUEST.


ITEM	D	L	Ød	P	P <sub>0</sub>	P <sub>1</sub>	P <sub>2</sub>	F	F <sub>1</sub>	W	W <sub>0</sub>	W <sub>1</sub>	W <sub>2</sub>	H	H <sub>0</sub>	A	ØD <sub>0</sub>	Δh <sub>2</sub>	t	Fig.	Taping Code
ToL.	± 0,5	± 2,0	± 0,05	± 1,0	± 0,2	± 0,5	± 1,0	+0,8 -0,2	± 1,0	± 0,5	min	± 0,5	max	+0,75 -0,5	± 0,5	max	± 0,5	max	± 0,2		
Nominal	4	7	0,45	12,7	12,7	5,1	6,35	2,5	3,5	18,0	10,0	9,0	1,5	18,5	-	11,0	4,0	1,0	0,7	1	FF
						3,85		5	5					17,5	16,0					2	FF
	5	7	0,45	12,7	12,7	5,1	6,35	2,5	3,5	18,0	10,0	9,0	1,5	18,5	-	11,0	4,0	1,0	0,7	1	FF
						3,85		5	5					17,5	16,0					2	FF
	5	11,5-15	0,5	12,7	12,7	5,1	6,35	2,5	3,5	18,0	10,0	9,0	1,5	18,5	-	11,0	4,0	1,0	0,7	1	FF
						3,85		5	5					16,0	16,0					2	FF
	6,3	7	0,45	12,7	12,7	5,1	6,35	2,5	3,5	18,0	10,0	9,0	1,5	18,5	-	11,0	4,0	1,0	0,7	1	FF
						3,85		5	5					17,5	16,0					2	FF
	6,3	11,5-15	0,5	12,7	12,7	5,1	6,35	2,5	3,5	18,0	10,0	9,0	1,5	18,5	-	11,0	4,0	1,0	0,7	1	FF
						3,85		5	5					16,0	16,0					2	FF
	8	11,5-20	0,6	12,7	12,7	4,6	6,35	3,5	3,5	18,0	10,0	9,0	1,5	18,5	-	11,0	4,0	1,0	0,7	3a	FF
						3,85		5	5					20,0	16,0					2	FF
10	12,5-36	0,6	12,7	12,7	3,85	6,35	5	5	18,0	10,0	9,0	1,5	18,5	-	11,0	4,0	1,0	0,7	3b	FF	
					5		5	5					18,5	-					4	FD	
12,5	15-36	0,6	15	15	5,0	7,5	5	5	18,0	12,0	9,0	1,5	18,5	-	11,0	4,0	1,0	0,7	3b	FF	
			25,4	12,7	3,85	6,35	5	5					5	5					4	FD	
16	15-31,5	0,8	30	15	3,75	7,5	7,5	7,5	18,0	12,0	9,0	1,5	18,5	-	11,0	4,0	1,0	0,7	4	FD	
18	15-25,5	0,8	30	15	3,75	7,5	7,5	7,5	18,0	12,0	9,0	1,5	18,5	-	11,0	4,0	1,0	0,7	4	FD	

Other taping styles available on request

in mm

RADIAL



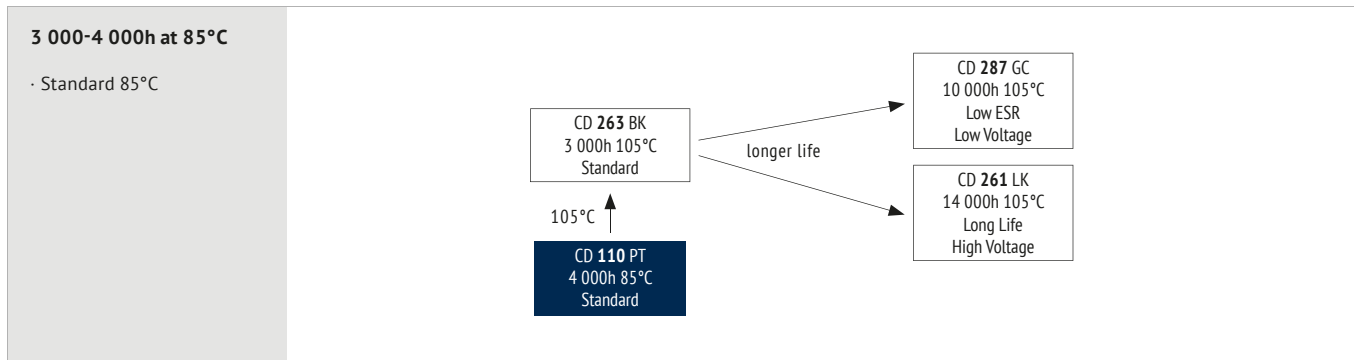

**ITEM CHARACTERISTICS**

Operating Temperature Range (°C)	-40 ~ +85	-25 ~ +85
Voltage Range (V)	6,3 ~ 250	350 ~ 500
Capacitance Range (µF)	0,1 ~ 22 000	
Capacitance Tolerance (20°C, 120Hz)	± 20%	

**!** The usage at lower temperatures than indicated may be possible. Please contact the Jianghai Europe sales office for approval.

Leakage Current	Rated Voltage (V)	6,3 ~ 100	160 ~ 500
	$I_{Leakage}$	After 1 minute at 20°C application of rated voltage, leakage current is not more than specified in table.	After 2 minutes at 20°C application of rated voltage, leakage current is not more than specified in table.

Stability at Low Temperature (Impedance Ratio at 120Hz)	Rated Voltage (V)	6,3	10	16	25	35	50	63	100	160	200	250	350	400	450	500
	$Z_{-25°C} / Z_{+20°C}$	4	3	2			3			6						
	$Z_{-40°C} / Z_{+20°C}$	8	6	4	3			8								

**ITEM USEFUL LIFE LOAD LIFE ENDURANCE TEST SHELF LIFE**


Lifetime	$\emptyset \leq 8$ : 3 000h $\emptyset \geq 10$ : 4 000h	$\emptyset \leq 8$ : 35 000h $\emptyset \geq 10$ : 50 000h	2 000h	2 000h	1 000h
Leakage Current	Not more than specified value		Not more than specified value	Not more than specified value	Not more than specified value
Capacitance Change	Within ± 50% of initial value		Within ± 20% of initial value	Within ± 20% of initial value	Within ± 20% of initial value
Dissipation Factor	Not more than 300% of specified value		Not more than 200% of specified value	Not more than 150% of specified value	Not more than 200% of specified value
Condition: Applied Voltage Applied Current Applied Temperature	$U_R$ $I_R$ 85°C	$U_R$ $1,4 \times I_R$ 40°C	$U_R$ $I_R$ 85°C	$U_R$ $I_R = 0$ 85°C IEC 60384	$U_R = 0$ $I_R = 0$ 85°C After test: $U_R$ to be applied for 30 min > 24h before measurement

**MULTIPLIER FOR RIPPLE CURRENT (FREQUENCY COEFFICIENT)**

Rated Voltage (V)	Frequency					
	CV (µFV)	50Hz	120Hz	1kHz	10kHz	100kHz
6,3 ~ 16	-	0,80	1,00	1,10	1,20	1,20
	≤ 1 000	0,80	1,00	1,50	1,70	1,70
25 ~ 35	> 1 000	0,80	1,00	1,20	1,30	1,30
	≤ 1 000	0,80	1,00	1,60	1,90	1,90
50 ~ 100	> 1 000	0,80	1,00	1,20	1,30	1,30
	-	0,80	1,00	1,30	1,50	1,60

Multipliers for typical operating conditions.

**MULTIPLIER FOR LIFETIME (LIFETIME DIAGRAM)**

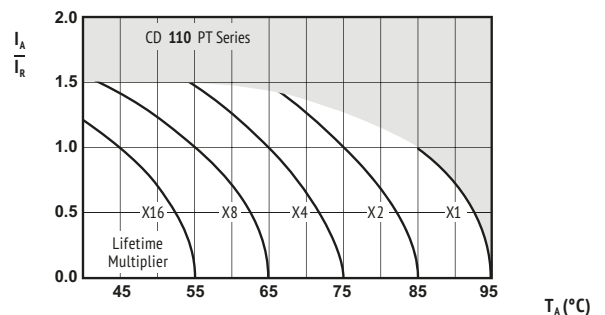

$I_A$  = actual ripple current at 120Hz,  
 $I_R$  = rated ripple current at 120Hz, 85°C  
Multiplier of Useful Life as a function of ambient temperature & ripple current load

**ENVIRONMENTAL**

The products are RoHS, WEEE and REACH compliant. The detailed version please see separate "Environmental Certificates" document or [www.jianghai-europe.com](http://www.jianghai-europe.com)

**! SAFETY FACTOR**

This diagram includes a safety margin. In many cases the allowed current capability/lifetime may be increased. For details and approvals please contact the Jianghai Europe sales office.

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 85°C 120Hz	Size øD x L	ORDER CODE ◇◇ = pin style & length △△ = pitch code Details: Page 15
(V)	(µF)	(Ω)		(µA)	(mA Arms)	(mm)	

6,3 (7,2) 0J	33	8,9	0,22	3	60	5 x 11,5	ECR0JPT330M◇◇△△0511
	47	6,3	0,22	3	70	5 x 11,5	ECR0JPT470M◇◇△△0511
	100	3,0	0,22	7	100	5 x 11,5	ECR0JPT101M◇◇△△0511
	220	1,4	0,22	14	200	5 x 11,5	ECR0JPT221M◇◇△△0511
	330	0,88	0,22	21	270	6,3 x 11,5	ECR0JPT331M◇◇△△0611
	470	0,62	0,22	30	322	6,3 x 11,5	ECR0JPT471M◇◇△△0611
		0,62	0,22	30	300	8 x 11,5	ECR0JPT471M◇◇△△0811
	1 000	0,29	0,22	63	546	8 x 11,5	ECR0JPT102M◇◇△△0811
		0,29	0,22	63	530	10 x 12,5	ECR0JPT102M◇◇△△1012
	2 200	0,14	0,24	139	1010	10 x 20	ECR0JPT222M◇◇△△1020
	3 300	0,10	0,26	208	1230	10 x 20	ECR0JPT332M◇◇△△1020
	4 700	0,080	0,28	297	1710	12,5 x 20	ECR0JPT472M◇◇△△1220
0,080		0,28	297	1700	16 x 25	ECR0JPT472M◇◇△△1625	
6 800	0,063	0,32	429	1930	12,5 x 25	ECR0JPT682M◇◇△△1225	
	0,063	0,32	429	1900	16 x 25	ECR0JPT682M◇◇△△1625	
10 000	0,054	0,40	630	2450	16 x 25	ECR0JPT103M◇◇△△1625	
15 000	0,045	0,50	945	2860	16 x 35,5	ECR0JPT153M◇◇△△1635	
	0,045	0,50	945	2900	18 x 35,5	ECR0JPT153M◇◇△△1835	
22 000	0,040	0,64	1386	3340	18 x 40	ECR0JPT223M◇◇△△1840	

10 (13) 1A	33	7,7	0,19	4	65	5 x 11,5	ECR1APT330M◇◇△△0511
	47	5,4	0,19	5	99	5 x 11,5	ECR1APT470M◇◇△△0511
	100	2,6	0,19	10	146	5 x 11,5	ECR1APT101M◇◇△△0511
	220	1,2	0,19	22	240	6,3 x 11,5	ECR1APT221M◇◇△△0611
	330	0,77	0,19	33	290	6,3 x 11,5	ECR1APT331M◇◇△△0611
	330	0,77	0,19	33	270	8 x 11,5	ECR1APT331M◇◇△△0811
	470	0,54	0,19	47	417	8 x 11,5	ECR1APT471M◇◇△△0811
	1 000	0,25	0,19	100	650	10 x 12,5	ECR1APT102M◇◇△△1012
	2 200	0,13	0,21	220	1080	10 x 20	ECR1APT222M◇◇△△1020
	3 300	0,10	0,23	330	1430	12,5 x 20	ECR1APT332M◇◇△△1220
	4 700	0,071	0,25	470	1780	12,5 x 25	ECR1APT472M◇◇△△1225
		0,071	0,25	470	1800	16 x 25	ECR1APT472M◇◇△△1625
6 800	0,060	0,29	680	2220	16 x 25	ECR1APT682M◇◇△△1625	
10 000	0,050	0,37	1000	2700	16 x 35,5	ECR1APT103M◇◇△△1635	
	0,050	0,37	1000	2750	18 x 35,5	ECR1APT103M◇◇△△1835	
15 000	0,042	0,47	1500	3100	18 x 35,5	ECR1APT153M◇◇△△1835	

16 (20) 1C	10	21,2	0,16	3	50	5 x 11,5	ECR1CPT100M◇◇△△0511
	22	9,7	0,16	4	75	5 x 11,5	ECR1CPT220M◇◇△△0511
	33	6,5	0,16	6	92	5 x 11,5	ECR1CPT330M◇◇△△0511
	47	4,6	0,16	8	110	5 x 11,5	ECR1CPT470M◇◇△△0511
	100	2,2	0,16	16	160	5 x 11,5	ECR1CPT101M◇◇△△0511
	220	0,97	0,16	36	264	6,3 x 11,5	ECR1CPT221M◇◇△△0611
		0,97	0,16	36	240	8 x 11,5	ECR1CPT221M◇◇△△0811
	330	0,64	0,16	53	383	8 x 11,5	ECR1CPT331M◇◇△△0811
	470	0,45	0,16	76	457	8 x 11,5	ECR1CPT471M◇◇△△0811
	470	0,46	0,16	76	420	10 x 12,5	ECR1CPT471M◇◇△△1012
	1 000	0,21	0,16	160	791	10 x 16	ECR1CPT102M◇◇△△1016
	2 200	0,11	0,18	352	1350	12,5 x 20	ECR1CPT222M◇◇△△1220
3 300	0,081	0,20	528	1690	12,5 x 25	ECR1CPT332M◇◇△△1225	
	0,081	0,20	528	1650	16 x 25	ECR1CPT332M◇◇△△1625	
4 700	0,063	0,22	752	2100	16 x 25	ECR1CPT472M◇◇△△1625	
6 800	0,051	0,26	1088	2580	16 x 35,5	ECR1CPT682M◇◇△△1635	
	0,051	0,26	1088	2600	18 x 35,5	ECR1CPT682M◇◇△△1835	
10 000	0,050	0,34	1600	3130	18 x 35,5	ECR1CPT103M◇◇△△1835	

25 (32) 1E	4,7	39,5	0,14	3	38	5 x 11,5	ECR1EPT4R7M◇◇△△0511
	10	18,6	0,14	3	55	5 x 11,5	ECR1EPT100M◇◇△△0511
	22	8,5	0,14	6	82	5 x 11,5	ECR1EPT220M◇◇△△0511
	33	5,7	0,14	9	100	5 x 11,5	ECR1EPT330M◇◇△△0511
	47	4,0	0,14	12	118	5 x 11,5	ECR1EPT470M◇◇△△0511
	100	1,9	0,14	25	199	6,3 x 11,5	ECR1EPT101M◇◇△△0611
	220	0,84	0,14	55	349	8 x 11,5	ECR1EPT221M◇◇△△0811
	330	0,56	0,14	83	510	10 x 12,5	ECR1EPT331M◇◇△△1012
	470	0,40	0,14	118	545	10 x 12,5	ECR1EPT471M◇◇△△1012
	1 000	0,19	0,14	250	996	10 x 20	ECR1EPT102M◇◇△△1020
	2 200	0,10	0,16	550	1660	12,5 x 25	ECR1EPT222M◇◇△△1225
		0,10	0,16	550	1500	16 x 25	ECR1EPT222M◇◇△△1625

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 85°C 120Hz	Size øD x L	ORDER CODE ◇◇ = pin style & length △△ = pitch code Details: Page 15
(V)	(µF)	(Ω)		(µA)	(mA Arms)	(mm)	

25 (32) 1E	3 300	0,070	0,18	825	2030	16 x 25	ECR1EPT332M◇◇△△1625
	4 700	0,060	0,20	1175	2650	16 x 31,5	ECR1EPT472M◇◇△△1631
	6 800	0,050	0,24	1700	3290	18 x 35,5	ECR1EPT682M◇◇△△1835

35 (44) 1V	4,7	33,9	0,12	3	40	5 x 11,5	ECR1VPT4R7M◇◇△△0511
	10	15,9	0,12	4	59	5 x 11,5	ECR1VPT100M◇◇△△0511
	22	7,3	0,12	8	87	5 x 11,5	ECR1VPT220M◇◇△△0511
	33	4,9	0,12	12	107	5 x 11,5	ECR1VPT330M◇◇△△0511
	47	3,4	0,12	17	130	5 x 11,5	ECR1VPT470M◇◇△△0511
	100	1,6	0,12	35	214	6,3 x 11,5	ECR1VPT101M◇◇△△0611
		1,6	0,12	35	190	8 x 11,5	ECR1VPT101M◇◇△△0811
	220	0,72	0,12	77	443	8 x 11,5	ECR1VPT221M◇◇△△0811
		0,72	0,12	77	440	10 x 12,5	ECR1VPT221M◇◇△△1012
	330	0,48	0,12	116	542	10 x 12,5	ECR1VPT331M◇◇△△1012
	470	0,34	0,12	165	664	10 x 16	ECR1VPT471M◇◇△△1016
	1 000	0,16	0,12	350	1210	12,5 x 20	ECR1VPT102M◇◇△△1220
2 200	0,080	0,14	770	1950	16 x 25	ECR1VPT222M◇◇△△1625	
3 300	0,060	0,16	1155	2510	16 x 35,5	ECR1VPT332M◇◇△△1635	
4 700	0,050	0,18	1645	2990	18 x 35,5	ECR1VPT472M◇◇△△1835	

50 (63) 1H	0,10	1327	0,10	3	3	5 x 11,5	ECR1HPT0R1M◇◇△△0511
	0,22	603	0,10	3	6	5 x 11,5	ECR1HPTR22M◇◇△△0511
	0,33	402	0,10	3	9	5 x 11,5	ECR1HPTR33M◇◇△△0511
	0,47	282	0,10	3	13	5 x 11,5	ECR1HPTR47M◇◇△△0511
	1,0	133	0,10	3	21	5 x 11,5	ECR1HPT101M◇◇△△0511
	2,2	60,3	0,10	3	31	5 x 11,5	ECR1HPT2R2M◇◇△△0511
	3,3	40,2	0,10	3	38	5 x 11,5	ECR1HPT3R3M◇◇△△0511
	4,7	28,2	0,10	3	45	5 x 11,5	ECR1HPT4R7M◇◇△△0511
	10	13,3	0,10	5	66	5 x 11,5	ECR1HPT100M◇◇△△0511
	22	6,1	0,10	11	98	5 x 11,5	ECR1HPT220M◇◇△△0511
	33	4,1	0,10	17	126	5 x 11,5	ECR1HPT330M◇◇△△0511
	47	2,9	0,10	24	155	6,3 x 11,5	ECR1HPT470M◇◇△△0611
100	1,4	0,10	50	260	8 x 11,5	ECR1HPT101M◇◇△△0811	
220	0,60	0,10	110	443	10 x 12,5	ECR1HPT221M◇◇△△1012	
330	0,40	0,10	165	595	10 x 16	ECR1HPT331M◇◇△△1016	
470	0,28	0,10	235	887	12,5 x 20	ECR1HPT471M◇◇△△1220	
1 000	0,13	0,10	500	1400	16 x 25	ECR1HPT102M◇◇△△1625	
2 200	0,070	0,12	1100	2340	16 x 35,5	ECR1HPT222M◇◇△△1635	
3 300	0,060	0,14	1650	2810	18 x 35,5	ECR1HPT332M◇◇△△1835	

63 (79) 1J	4,7	25,4	0,09	3	45	5 x 11,5	ECR1JPT4R7M◇◇△△0511
	10	11,9	0,09	7	66	5 x 11,5	ECR1JPT100M◇◇△△0511
	22	5,5	0,09	14	100	5 x 11,5	ECR1JPT220M◇◇△△0511
	33	3,7	0,09	21	140	6,3 x 11,5	ECR1JPT330M◇◇△△0611
	47	2,6	0,09	30	170	6,3 x 11,5	ECR1JPT470M◇◇△△0611
		2,6	0,09	30	150	8 x 11,5	ECR1JPT470M◇◇△△0811
	100	1,2	0,09	63	300	10 x 12,5	ECR1JPT101M◇◇△△1012
	220	0,54	0,09	139	470	10 x 16	ECR1JPT221M◇◇△△1016
	330	0,36	0,09	208	710	10 x 20	ECR1JPT331M◇◇△△1020
	470	0,25	0,09	297	900	12,5 x 20	ECR1JPT471M◇◇△△1220
	1 000	0,12	0,09	630	1300	16 x 25	ECR1JPT102M◇◇△△1625
		0,12	0,09	630	1550	16 x 31,5	ECR1JPT102M◇◇△△1631


100 (125) 2A	0,10	1 062	0,08	3	2,1	5 x 11,5	ECR2APT0R1M◇◇△△0511
	0,22	483	0,08	3	4,7	5 x 11,5	ECR2APTR22M◇◇△△0511
	0,33	322	0,08	3	7	5 x 11,5	ECR2APTR33M◇◇△△0511
	0,47	226	0,08	3	10	5 x 11,5	ECR2APTR47M◇◇△△0511
	1,0	106	0,08	3	21	5 x 11,5	ECR2APTO10M◇◇△△0511
	2,2	48,3	0,08	3	30	5 x 11,5	ECR2APT2R2M◇◇△△0511
	3,3	32,2	0,08	4	40	5 x 11,5	ECR2APT3R3M◇◇△△0511
	4,7	22,6	0,08	5	45	5 x 11,5	ECR2APT4R7M◇◇△△0511
	10	10,6	0,08	10	75	6,3 x 11,5	ECR2APT100M◇◇△△0611
	22	4,83	0,08	22	130	6,3 x 11,5	ECR2APT220M◇◇△△0611
		4,83	0,08				

RADIAL

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 85°C 120Hz	Size øD x L (mm)	ORDER CODE ◇◇ = pin style & length △△ = pitch code Details: Page 15	
(V)	(µF)	(Ω)		(µA)	(mA <sub>RMS</sub> )	(mm)		
100 (125) 2A	100	1,06	0,08	100	370	10 x 20	ECR2APT101M◇◇△△1020	
		1,06	0,08	100	380	12,5 x 20	ECR2APT101M◇◇△△1220	
	220	0,48	0,08	220	620	12,5 x 25	ECR2APT221M◇◇△△1225	
		0,48	0,08	220	720	16 x 25	ECR2APT221M◇◇△△1625	
	330	0,32	0,08	330	760	16 x 25	ECR2APT331M◇◇△△1625	
		0,23	0,08	470	1000	16 x 25	ECR2APT471M◇◇△△1625	
	470	0,23	0,08	470	1150	16 x 31,5	ECR2APT471M◇◇△△1631	
		0,23	0,08	470	1150	16 x 31,5	ECR2APT471M◇◇△△1631	
	1 000	0,11	0,08	1000	1380	18 x 40	ECR2APT102M◇◇△△1840	
	160 (200) 2C	0,47	339	0,12	13	15	6,3 x 11,5	ECR2CPT47M◇◇△△0611
1,0		159	0,12	15	22	6,3 x 11,5	ECR2CPT101M◇◇△△0611	
2,2		72,4	0,12	21	32	6,3 x 11,5	ECR2CPT2R2M◇◇△△0611	
		48,3	0,12	26	40	6,3 x 11,5	ECR2CPT3R3M◇◇△△0611	
3,3		48,3	0,12	26	35	8 x 11,5	ECR2CPT3R3M◇◇△△0811	
		33,9	0,12	33	48	6,3 x 11,5	ECR2CPT4R7M◇◇△△0611	
4,7		33,9	0,12	33	40	8 x 11,5	ECR2CPT4R7M◇◇△△0811	
		15,9	0,12	58	81	8 x 11,5	ECR2CPT100M◇◇△△0811	
10		15,9	0,12	58	70	10 x 12,5	ECR2CPT100M◇◇△△1012	
		7,24	0,12	116	151	10 x 16	ECR2CPT220M◇◇△△1016	
33		4,83	0,12	169	202	10 x 20	ECR2CPT330M◇◇△△1020	
47		3,39	0,12	236	266	12,5 x 20	ECR2CPT470M◇◇△△1220	
100		1,59	0,12	490	422	12,5 x 25	ECR2CPT101M◇◇△△1225	
		1,59	0,12	490	400	16 x 25	ECR2CPT101M◇◇△△1625	
220		0,72	0,12	1066	783	16 x 31,5	ECR2CPT221M◇◇△△1631	
330		0,48	0,12	1594	1080	18 x 31,5	ECR2CPT331M◇◇△△1831	
200 (250) 2D	0,47	339	0,12	13	15	6,3 x 11,5	ECR2DPT47M◇◇△△0611	
	1,0	159	0,12	16	22	6,3 x 11,5	ECR2DPT101M◇◇△△0611	
	2,2	72,4	0,12	24	32	6,3 x 11,5	ECR2DPT2R2M◇◇△△0611	
		48,3	0,12	30	40	6,3 x 11,5	ECR2DPT3R3M◇◇△△0611	
	3,3	48,3	0,12	30	35	8 x 11,5	ECR2DPT3R3M◇◇△△0811	
		33,9	0,12	39	56	8 x 11,5	ECR2DPT4R7M◇◇△△0811	
	4,7	33,9	0,12	39	50	10 x 12,5	ECR2DPT4R7M◇◇△△1012	
		15,9	0,12	70	94	8 x 11,5	ECR2DPT100M◇◇△△0811	
	10	15,9	0,12	70	94	10 x 12,5	ECR2DPT100M◇◇△△1012	
		7,24	0,12	142	170	10 x 20	ECR2DPT220M◇◇△△1020	
	33	4,83	0,12	208	223	12,5 x 20	ECR2DPT330M◇◇△△1220	
	47	3,39	0,12	292	265	12,5 x 20	ECR2DPT470M◇◇△△1220	
	100	1,59	0,12	610	483	16 x 25,5	ECR2DPT101M◇◇△△1625	
	220	0,72	0,12	1330	882	18 x 36	ECR2DPT221M◇◇△△1836	
	250 (300) 2E	0,47	423	0,15	14	15	6,3 x 11,5	ECR2EPT47M◇◇△△0611
		1,0	199	0,15	18	22	6,3 x 11,5	ECR2EPT101M◇◇△△0611
2,2		90,5	0,15	27	32	6,3 x 11,5	ECR2EPT2R2M◇◇△△0611	
		60,3	0,15	35	48	8 x 11,5	ECR2EPT3R3M◇◇△△0811	
3,3		60,3	0,15	35	35	10 x 12,5	ECR2EPT3R3M◇◇△△1012	
		42,3	0,15	46	56	8 x 11,5	ECR2EPT4R7M◇◇△△0811	
4,7		42,3	0,15	46	40	10 x 12,5	ECR2EPT4R7M◇◇△△1012	
		19,9	0,15	85	101	10 x 12,5	ECR2EPT100M◇◇△△1012	
22		9,05	0,15	175	182	10 x 20	ECR2EPT220M◇◇△△1020	
33		6,03	0,15	258	243	12,5 x 20	ECR2EPT330M◇◇△△1220	
47		4,23	0,15	363	295	12,5 x 25	ECR2EPT470M◇◇△△1225	
		4,23	0,15	363	240	16 x 25,5	ECR2EPT470M◇◇△△1625	
100		1,99	0,15	760	528	16 x 31,5	ECR2EPT101M◇◇△△1631	
350 (400) 2V		0,47	424	0,15	15	15	6,3 x 11,5	ECR2VPT47M◇◇△△0611
		1,0	199	0,15	21	22	6,3 x 11,5	ECR2VPT101M◇◇△△0611
			199	0,15	21	15	8 x 11,5	ECR2VPT101M◇◇△△0811
	2,2	90,5	0,15	34	38	6,3 x 11,5	ECR2VPT2R2M◇◇△△0611	
		90,5	0,15	34	38	8 x 11,5	ECR2VPT2R2M◇◇△△0811	
	3,3	90,5	0,15	34	30	10 x 12,5	ECR2VPT2R2M◇◇△△1012	
		60,3	0,15	45	53	8 x 11,5	ECR2VPT3R3M◇◇△△0811	
	4,7	60,3	0,15	45	53	10 x 12,5	ECR2VPT3R3M◇◇△△1012	
		42,3	0,15	60	65	10 x 12,5	ECR2VPT4R7M◇◇△△1012	
	10	19,9	0,15	115	115	10 x 20	ECR2VPT100M◇◇△△1020	
	22	9,05	0,15	241	197	12,5 x 20	ECR2VPT220M◇◇△△1220	
	33	6,03	0,15	357	277	12,5 x 25	ECR2VPT330M◇◇△△1225	
		6,03	0,15	357	277	16 x 25,5	ECR2VPT330M◇◇△△1625	
	47	4,23	0,15	504	330	16 x 25,5	ECR2VPT470M◇◇△△1625	
	100	1,99	0,15	1060	507	18 x 31,5	ECR2VPT101M◇◇△△1831	

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 85°C 120Hz	Size øD x L (mm)	ORDER CODE ◇◇ = pin style & length △△ = pitch code Details: Page 15
(V)	(µF)	(Ω)		(µA)	(mA <sub>RMS</sub> )	(mm)	
400 (250) 2G	0,47	565	0,20	16	15	6,3 x 11,5	ECR2GPTR47M◇◇△△0611
		265	0,20	22	22	6,3 x 11,5	ECR2GPT010M◇◇△△0611
	1,0	265	0,20	22	15	8 x 11,5	ECR2GPT010M◇◇△△0811
		121	0,20	37	38	8 x 11,5	ECR2GPT2R2M◇◇△△0811
	2,2	121	0,20	37	20	10 x 12,5	ECR2GPT2R2M◇◇△△1012
		80,4	0,20	50	54	10 x 12,5	ECR2GPT3R3M◇◇△△1012
	3,3	80,4	0,20	50	54	10 x 12,5	ECR2GPT3R3M◇◇△△1012
		56,5	0,20	67	71	10 x 12,5	ECR2GPT4R7M◇◇△△1012
	4,7	56,5	0,20	67	71	10 x 12,5	ECR2GPT4R7M◇◇△△1012
		26,5	0,20	130	123	10 x 20	ECR2GPT100M◇◇△△1020
	22	12,1	0,20	274	197	12,5 x 25	ECR2GPT220M◇◇△△1225
		12,1	0,20	274	140	16 x 25,5	ECR2GPT220M◇◇△△1625
	33	8,04	0,20	406	277	16 x 25,5	ECR2GPT330M◇◇△△1625
	47	5,65	0,20	574	361	16 x 25,5	ECR2GPT470M◇◇△△1625
68	3,9	0,20	826	423	18 x 25,5	ECR2GPT680M◇◇△△1825	
82	3,2	0,20	994	509	18 x 31,5	ECR2GPT820M◇◇△△1831	
100	2,7	0,20	1210	595	18 x 36	ECR2GPT101M◇◇△△1836	
450 (500) 2W	0,47	649	0,23	17	18	6,3 x 11,5	ECR2WPTR47M◇◇△△0611
	1,0	305	0,23	24	25	6,3 x 11,5	ECR2WPT010M◇◇△△0611
	2,2	139	0,23	40	43	8 x 11,5	ECR2WPT2R2M◇◇△△0811
		92,5	0,23	55	59	10 x 12,5	ECR2WPT3R3M◇◇△△1012
	3,3	92,5	0,23	55	59	10 x 12,5	ECR2WPT3R3M◇◇△△1012
		64,9	0,23	74	76	10 x 16	ECR2WPT4R7M◇◇△△1016
	4,7	64,9	0,23	74	76	10 x 16	ECR2WPT4R7M◇◇△△1016
		30,5	0,23	145	123	10 x 20	ECR2WPT100M◇◇△△1020
	22	13,9	0,23	307	226	12,5 x 25	ECR2WPT220M◇◇△△1225
		13,9	0,23	307	226	16 x 25,5	ECR2WPT220M◇◇△△1625
	33	9,20	0,23	456	304	16 x 25,5	ECR2WPT330M◇◇△△1625
	47	6,5	0,23	645	380	16 x 31,5	ECR2WPT470M◇◇△△1631
	68	4,5	0,23	928	436	18 x 25,5	ECR2WPT680M◇◇△△1825
	82	3,7	0,23	1117	530	18 x 31,5	ECR2WPT820M◇◇△△1831
100	2,6	0,23	1360	610	18 x 36	ECR2WPT101M◇◇△△1836	
500 (550) 2H	1,0	305	0,23	25	35	10 x 12,5	ECR2HPT010M◇◇△△1012
	2,2	139	0,23	43	45	10 x 16	ECR2HPT2R2M◇◇△△1016
	3,3	92,5	0,23	60	75	10 x 20	ECR2HPT3R3M◇◇△△1020
	4,7	64,9	0,23	81	100	12,5 x 20	ECR2HPT4R7M◇◇△△1220
	10	30,5	0,23	160	165	12,5 x 25	ECR2HPT100M◇◇△△1225



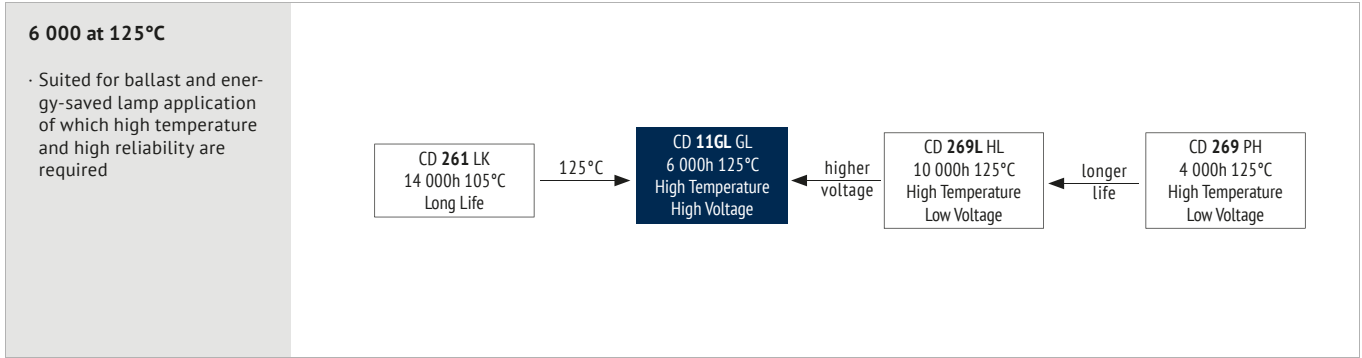

**ITEM CHARACTERISTICS**

Operating Temperature Range (°C)	-40 ~ +125	-25 ~ +125
Voltage Range (V)	160 ~ 250	350 ~ 450
Capacitance Range (µF)	2,2 ~ 330	
Capacitance Tolerance (20°C, 120Hz)	± 20%	
Leakage Current	After 1 minute at 20°C application of rated voltage, leakage current is not more than specified in table.	

**!** The usage at lower temperatures than indicated may be possible. Please contact the Jianghai Europe sales office for approval.

RADIAL


ITEM	USEFUL LIFE		LOAD LIFE	ENDURANCE TEST	SHELF LIFE	
Lifetime	6 000h	80 000h	Ø 10 : 4 000h Ø 12,5 -18 : 5 000h	6 000h	500h	
Leakage Current	Not more than specified value		Not more than specified value	Not more than specified value	Not more than specified value	
Capacitance Change	Within ± 30% of initial value		Within ± 25% of initial value	Within ± 25% of initial value	Within ± 20% of initial value	
Dissipation Factor	Not more than 300% of specified value		Not more than 300% of specified value	Not more than 300% of specified value	Not more than 200% of specified value	
Condition:						
Applied Voltage	$U_R$	$U_R$	$U_R$	$U_R$	$U_R = 0$	After test: $U_R$ to be applied for 30 min > 24h before measurement
Applied Current	$I_R$	$1,5 \times I_R$	$I_R$	$I_R = 0$	$I_R = 0$	
Applied Temperature	125°C	75°C	125°C	125°C IEC 60384	125°C	

**MULTIPLIER FOR RIPPLE CURRENT (FREQUENCY COEFFICIENT)**

<b>Frequency</b>	50Hz	120Hz	500Hz	1kHz	>10kHz
<b>Coefficient</b>	0,80	1,0	1,2	1,3	1,5

Multipliers for typical operating conditions.

**MULTIPLIER FOR LIFETIME (LIFETIME DIAGRAM)**

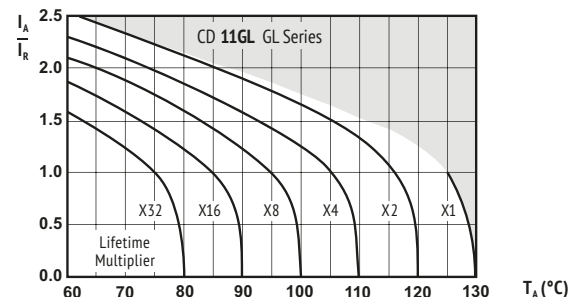

$I_A$  = actual ripple current at 120Hz,  
 $I_R$  = rated ripple current at 120Hz, 125°C  
 Multiplier of Useful Life as a function of ambient temperature & ripple current load

**ENVIRONMENTAL**

The products are RoHS, WEEE and RECh compliant. The detailed version please see separate "Environmental Certificates" document or [www.jianghai-europe.com](http://www.jianghai-europe.com)


**! SAFETY FACTOR**

This diagram includes a safety margin. In many cases the allowed current capability/lifetime may be increased. For details and approvals please contact the Jianghai Europe sales office.

RADIAL

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	ESR <sub>yp</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current (μA)	I <sub>RAC</sub> Rated Ripple Current 125°C 120Hz (mArms)	Size øD x L (mm)	ORDER CODE ◇◇ = pin style & length △△ = pitch code Details: Page 15
160 (200) 2C	10	15,9	8,0	0,12	118	62	10 x 16	ECR2CGL100M◇◇△△1016
	22	7,2	3,6	0,12	176	101	10 x 20	ECR2CGL220M◇◇△△1020
	33	4,8	2,4	0,12	228	139	12,5 x 20	ECR2CGL330M◇◇△△1220
	47	3,4	1,7	0,12	296	165	12,5 x 25	ECR2CGL470M◇◇△△1220
	100	1,6	0,80	0,12	550	302	16 x 25	ECR2CGL101M◇◇△△1625
	220	0,70	0,40	0,12	1126	514	18 x 31,5	ECR2CGL221M◇◇△△1831
	330	0,50	0,20	0,12	1654	673	18 x 36	ECR2CGL331M◇◇△△1836
200 (250) 2D	10	15,9	8,0	0,12	130	62	10 x 16	ECR2DGL100M◇◇△△1016
	22	7,2	3,6	0,12	202	101	10 x 20	ECR2DGL220M◇◇△△1020
	33	4,8	2,4	0,12	268	139	12,5 x 20	ECR2DGL330M◇◇△△1220
	47	3,4	1,7	0,12	352	165	12,5 x 20	ECR2DGL470M◇◇△△1220
	100	1,6	0,80	0,12	670	302	16 x 25	ECR2DGL101M◇◇△△1625
	220	0,70	0,40	0,12	1390	514	18 x 31,5	ECR2DGL221M◇◇△△1831
	330	0,50	0,20	0,12	2050	673	18 x 36	ECR2DGL331M◇◇△△1836
250 (300) 2E	4,7	33,9	16,9	0,12	105	42	10 x 16	ECR2EGL4R7M◇◇△△1016
	6,8	23,4	11,7	0,12	121	51	10 x 16	ECR2EGL6R8M◇◇△△1016
	10	15,9	8,0	0,12	145	68	10 x 20	ECR2EGL100M◇◇△△1020
	22	7,2	3,6	0,12	235	113	12,5 x 20	ECR2EGL220M◇◇△△1220
	33	4,8	2,4	0,12	318	153	12,5 x 25	ECR2EGL330M◇◇△△1225
	47	3,4	1,7	0,12	423	207	16 x 25	ECR2EGL470M◇◇△△1625
	100	1,6	0,80	0,12	820	346	18 x 31,5	ECR2EGL101M◇◇△△1831
	220	0,70	0,40	0,12	1720	550	18 x 36	ECR2EGL221M◇◇△△1836
350 (400) 2V	2,2	90,5	36,2	0,15	93	26	10 x 16	ECR2VGL2R2M◇◇△△1016
	3,3	60,3	24,1	0,15	105	32	10 x 16	ECR2VGL3R3M◇◇△△1016
	4,7	42,3	16,9	0,15	119	42	10 x 20	ECR2VGL4R7M◇◇△△1020
	5,6	35,5	14,2	0,15	129	46	10 x 20	ECR2VGL5R6M◇◇△△1020
	6,8	29,3	11,7	0,15	141	56	12,5 x 20	ECR2VGL6R8M◇◇△△1220
	10	19,9	8,0	0,15	175	68	12,5 x 20	ECR2VGL100M◇◇△△1220
	22	9,0	3,6	0,15	301	112	12,5 x 25	ECR2VGL220M◇◇△△1225
	33	6,0	2,4	0,15	417	155	16 x 25	ECR2VGL330M◇◇△△1625
	47	4,2	1,7	0,15	564	201	16 x 31,5	ECR2VGL470M◇◇△△1631
400 (450) 2G	2,2	90,5	36,2	0,15	96	26	10 x 16	ECR2GGL2R2M◇◇△△1016
	3,3	60,3	24,1	0,15	110	32	10 x 16	ECR2GGL3R3M◇◇△△1016
	4,7	42,3	16,9	0,15	126	42	10 x 20	ECR2GGL4R7M◇◇△△1020
	5,6	35,5	14,2	0,15	137	46	10 x 20	ECR2GGL5R6M◇◇△△1020
	6,8	29,3	11,7	0,15	152	56	12,5 x 20	ECR2GGL6R8M◇◇△△1220
	10	19,9	8,0	0,15	190	68	12,5 x 20	ECR2GGL100M◇◇△△1220
	22	9,0	3,6	0,15	334	112	12,5 x 25	ECR2GGL220M◇◇△△1225
	33	6,0	2,4	0,15	466	155	16 x 25	ECR2GGL330M◇◇△△1625
	47	4,2	1,7	0,15	634	201	16 x 31,5	ECR2GGL470M◇◇△△1631
450 (500) 2W	2,2	90,5	36,2	0,15	100	26	10 x 16	ECR2WGL2R2M◇◇△△1016
	3,3	60,3	24,1	0,15	115	32	10 x 16	ECR2WGL3R3M◇◇△△1016
	4,7	42,3	16,9	0,15	133	42	10 x 20	ECR2WGL4R7M◇◇△△1020
	5,6	35,5	14,2	0,15	146	51	12,5 x 20	ECR2WGL5R6M◇◇△△1220
	6,8	29,3	11,7	0,15	162	56	12,5 x 20	ECR2WGL6R8M◇◇△△1220
	10	19,9	8,0	0,15	205	75	12,5 x 25	ECR2WGL100M◇◇△△1225
	22	9,0	3,6	0,15	367	127	16 x 25	ECR2WGL220M◇◇△△1625
	33	6,0	2,4	0,15	516	168	16 x 31,5	ECR2WGL330M◇◇△△1631
	47	4,2	1,7	0,15	705	212	18 x 31,5	ECR2WGL470M◇◇△△1831

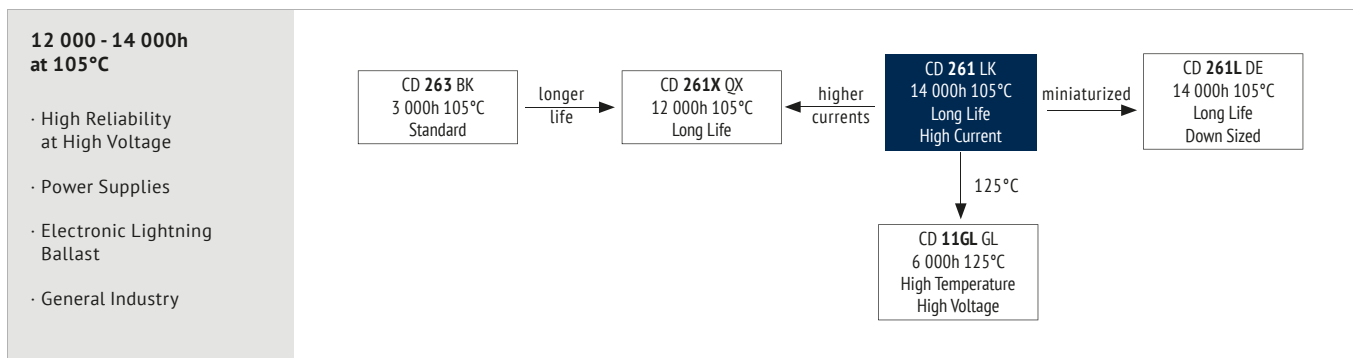


**ITEM CHARACTERISTICS**

Operating Temperature Range (°C)	-40 ~ +105
Voltage Range (V)	160 ~ 450
Capacitance Range (µF)	6,8 ~ 220
Capacitance Tolerance (20°C, 120Hz)	± 20%

**!** The usage at lower temperatures than indicated may be possible. Please contact the Jianghai Europe sales office for approval.

Leakage Current (µA) After 1 minute at 20°C application of rated voltage, leakage current is not more than specified in table.


Stability at Low Temperature (Impedance Ratio at 120Hz)	Rated Voltage (V)	160	200	250	350	400	450
	$Z_{-25°C} / Z_{+20°C}$	3		4	6		
	$Z_{-40°C} / Z_{+20°C}$	6		8			

ITEM	USEFUL LIFE	LOAD LIFE	ENDURANCE TEST	SHELF LIFE	
Lifetime	$\emptyset \leq 10$ : 12 000h $\emptyset \geq 12,5$ : 14 000h	> 100 000h	$\emptyset \leq 10$ : 10 000h $\emptyset \geq 12,5$ : 12 000h	$\emptyset \leq 10$ : 10 000h $\emptyset \geq 12,5$ : 12 000h	1 000h
Leakage Current	Not more than specified value		Not more than specified value	Not more than specified value	Not more than specified value
Capacitance Change	Within ± 30% of initial value		Within ± 20% of initial value	Within ± 20% of initial value	Within ± 20% of initial value
Dissipation Factor	Not more than 300% of specified value		Not more than 200% of specified value	Not more than 200% of specified value	Not more than 200% of specified value
Condition: Applied Voltage Applied Current Applied Temperature	$U_R$ $I_R$ 105°C	$U_R$ $1,4 \times I_R$ 60°C	$U_R$ $I_R$ 105°C	$U_R$ $I_R = 0$ 105°C IEC 60384	$U_R = 0$ $I_R = 0$ 105°C  After test: $U_R$ to be applied for 30 min > 24h before measurement

**MULTIPLIER FOR RIPPLE CURRENT (FREQUENCY COEFFICIENT)**

<b>Frequency</b>		120Hz	1kHz	10kHz	100kHz
<b>Coefficient</b>	6,8 ~ 82µF	0,40	0,60	0,84	1,00
	100 ~ 220µF	0,44	0,67	0,89	1,00

Multipliers for typical operating conditions.

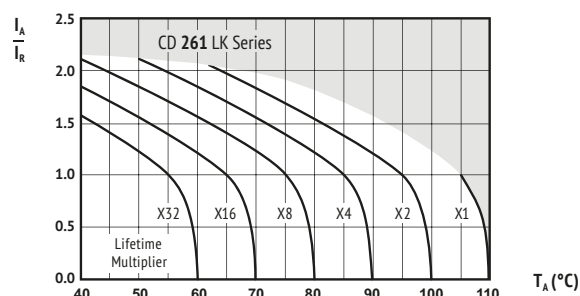**MULTIPLIER FOR LIFETIME (LIFETIME DIAGRAM)**


$I_A$  = actual ripple current at 100kHz,  
 $I_R$  = rated ripple current at 100kHz, 105°C  
 Multiplier of Useful Life as a function of ambient temperature & ripple current load

**ENVIRONMENTAL**

The products are RoHS, WEEE and REAcH compliant. The detailed version please see separate "Environmental Certificates" document or [www.jianghai-europe.com](http://www.jianghai-europe.com)

**! SAFETY FACTOR**

This diagram includes a safety margin. In many cases the allowed current capability/lifetime may be increased. For details and approvals please contact the Jianghai Europe sales office.

**RADIAL**

RADIAL

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 105°C 100Hz	Size øD x L	ORDER CODE ◇◇ = pin style & length △△ = pitch code Details: Page 15
(V)	(µF)	(Ω)		(µA)	(mAmps)	(mm)	
160 (220) 2C	10	7,3	0,15	164	250	10 x 16	ECR2CLK100M◇◇△△1016
	22	3,3	0,15	241	500	10 x 20	ECR2CLK220M◇◇△△1020
	33	2,2	0,15	312	500	10 x 20	ECR2CLK330M◇◇△△1020
	47	1,6	0,15	401	660	10 x 30	ECR2CLK470M◇◇△△1030
		1,6	0,15	401	660	12,5 x 20	ECR2CLK470M◇◇△△1220
	68	1,1	0,15	536	760	10 x 35	ECR2CLK680M◇◇△△1035
		1,1	0,15	536	760	12,5 x 25	ECR2CLK680M◇◇△△1225
		1,1	0,15	536	760	16 x 20	ECR2CLK680M◇◇△△1620
	100	0,70	0,15	740	1080	10 x 40	ECR2CLK101M◇◇△△1040
		0,70	0,15	740	1080	12,5 x 30	ECR2CLK101M◇◇△△1230
		0,70	0,15	740	1120	16 x 25,5	ECR2CLK101M◇◇△△1625
		0,70	0,15	740	1120	18 x 20,5	ECR2CLK101M◇◇△△1820
	150	0,50	0,15	1060	1360	12,5 x 40	ECR2CLK151M◇◇△△1240
		0,50	0,15	1060	1360	16 x 31,5	ECR2CLK151M◇◇△△1631
		0,50	0,15	1060	1360	18 x 25,5	ECR2CLK151M◇◇△△1825
	220	0,30	0,15	1508	1400	12,5 x 50	ECR2CLK221M◇◇△△1250
		0,30	0,15	1508	1400	16 x 31,5	ECR2CLK221M◇◇△△1631
		0,30	0,15	1508	1400	18 x 25,5	ECR2CLK221M◇◇△△1825

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 105°C 100Hz	Size øD x L	ORDER CODE ◇◇ = pin style & length △△ = pitch code Details: Page 15
(V)	(µF)	(Ω)		(µA)	(mAmps)	(mm)	
200 (250) 2D	10	7,3	0,15	180	250	10 x 16	ECR2DLK100M◇◇△△1016
	22	3,3	0,15	276	500	10 x 20	ECR2DLK220M◇◇△△1020
	33	2,2	0,15	364	600	10 x 20	ECR2DLK330M◇◇△△1020
	47	1,6	0,15	476	660	10 x 30	ECR2DLK470M◇◇△△1030
		1,6	0,15	476	660	12,5 x 20	ECR2DLK470M◇◇△△1220
	68	1,1	0,15	644	760	10 x 40	ECR2DLK680M◇◇△△1040
		1,1	0,15	644	760	12,5 x 25	ECR2DLK680M◇◇△△1225
		1,1	0,15	644	760	16 x 20	ECR2DLK680M◇◇△△1620
	100	0,70	0,15	900	1120	10 x 45	ECR2DLK101M◇◇△△1045
		0,70	0,15	900	1120	12,5 x 36	ECR2DLK101M◇◇△△1236
		0,70	0,15	900	1120	16 x 25,5	ECR2DLK101M◇◇△△1625
		0,70	0,15	900	1120	18 x 20,5	ECR2DLK101M◇◇△△1820
	150	0,50	0,15	1300	1360	12,5 x 45	ECR2DLK151M◇◇△△1245
		0,50	0,15	1300	1360	16 x 31,5	ECR2DLK151M◇◇△△1631
		0,50	0,15	1300	1360	18 x 25,5	ECR2DLK151M◇◇△△1825
	220	0,30	0,15	1860	1700	16 x 40	ECR2DLK221M◇◇△△1640
		0,30	0,15	1860	1700	18 x 31,5	ECR2DLK221M◇◇△△1831

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 105°C 100Hz	Size øD x L	ORDER CODE ◇◇ = pin style & length △△ = pitch code Details: Page 15
(V)	(µF)	(Ω)		(µA)	(mAmps)	(mm)	
250 (300) 2E	10	7,3	0,15	200	280	10 x 20	ECR2ELK100M◇◇△△1020
	22	3,3	0,15	320	600	12,5 x 20	ECR2ELK220M◇◇△△1220
	33	2,2	0,15	430	600	12,5 x 20	ECR2ELK330M◇◇△△1220
	47	1,6	0,15	570	720	10 x 35	ECR2ELK470M◇◇△△1035
		1,6	0,15	570	720	12,5 x 25	ECR2ELK470M◇◇△△1225
		1,6	0,15	570	720	16 x 20	ECR2ELK470M◇◇△△1620
	68	1,1	0,15	780	920	10 x 45	ECR2ELK680M◇◇△△1045
		1,1	0,15	780	920	12,5 x 36	ECR2ELK680M◇◇△△1236
		1,1	0,15	780	920	16 x 25,5	ECR2ELK680M◇◇△△1625
		1,1	0,15	780	920	18 x 20,5	ECR2ELK680M◇◇△△1820
	100	0,70	0,15	1100	1200	12,5 x 45	ECR2ELK101M◇◇△△1245
		0,70	0,15	1100	1200	16 x 31,5	ECR2ELK101M◇◇△△1631
		0,70	0,15	1100	1200	18 x 25,5	ECR2ELK101M◇◇△△1825
	150	0,50	0,15	1600	1500	18 x 31,5	ECR2ELK151M◇◇△△1831


U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 105°C 100Hz	Size øD x L	ORDER CODE ◇◇ = pin style & length △△ = pitch code Details: Page 15
(V)	(µF)	(Ω)		(µA)	(mAmps)	(mm)	
350 (400) 2V	6,8	10,7	0,20	196	220	10 x 16	ECR2VLK6R8M◇◇△△1016
	10	7,3	0,20	240	280	10 x 20	ECR2VLK100M◇◇△△1020
	22	3,3	0,20	408	350	12,5 x 20	ECR2VLK220M◇◇△△1220
	33	2,2	0,20	562	500	10 x 35	ECR2VLK330M◇◇△△1035
		2,2	0,20	562	500	12,5 x 25	ECR2VLK330M◇◇△△1225
		2,2	0,20	562	500	16 x 20	ECR2VLK330M◇◇△△1620
	47	1,6	0,20	758	660	10 x 45	ECR2VLK470M◇◇△△1045
		1,6	0,20	758	660	12,5 x 36	ECR2VLK470M◇◇△△1236
		1,6	0,20	758	660	16 x 25	ECR2VLK470M◇◇△△1625
		1,6	0,20	758	660	18 x 20,5	ECR2VLK470M◇◇△△1820
	68	1,1	0,20	1052	850	12,5 x 45	ECR2VLK680M◇◇△△1245
		1,1	0,20	1052	850	16 x 31,5	ECR2VLK680M◇◇△△1631
		1,1	0,20	1052	850	18 x 25,5	ECR2VLK680M◇◇△△1825

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 105°C 100Hz	Size øD x L	ORDER CODE ◇◇ = pin style & length △△ = pitch code Details: Page 15
(V)	(µF)	(Ω)		(µA)	(mAmps)	(mm)	
400 (450) 2G	6,8	10,9	0,20	209	220	10 x 16	ECR2GLK6R8M◇◇△△1016
	10	7,3	0,20	260	280	10 x 20	ECR2GLK100M◇◇△△1020
	22	3,3	0,20	452	430	10 x 35	ECR2GLK220M◇◇△△1035
		3,3	0,20	452	430	12,5 x 25	ECR2GLK220M◇◇△△1225
	33	2,2	0,20	628	640	16 x 20	ECR2GLK220M◇◇△△1620
		2,2	0,20	628	640	10 x 45	ECR2GLK330M◇◇△△1045
		2,2	0,20	628	640	12,5 x 36	ECR2GLK330M◇◇△△1236
		2,2	0,20	628	640	16 x 25,5	ECR2GLK330M◇◇△△1625
	47	2,2	0,20	628	640	18 x 20,5	ECR2GLK330M◇◇△△1820
		1,6	0,20	852	840	12,5 x 40	ECR2GLK470M◇◇△△1240
		1,6	0,20	852	840	16 x 31,5	ECR2GLK470M◇◇△△1631
	68	1,6	0,20	852	840	18 x 25,5	ECR2GLK470M◇◇△△1825
		1,3	0,20	1188	1000	12,5 x 50	ECR2GLK680M◇◇△△1250
		1,3	0,20	1188	1000	18 x 25,5	ECR2GLK680M◇◇△△1825
	82	0,90	0,20	1412	1100	12,5 x 61	ECR2GLK820M◇◇△△1261
		0,90	0,20	1412	1100	18 x 31,5	ECR2GLK820M◇◇△△1831
	100	0,70	0,20	1700	1280	18 x 36	ECR2GLK101M◇◇△△1836
	120	0,60	0,20	2020	1480	18 x 40	ECR2GLK121M◇◇△△1840
150	0,50	0,20	2500	1770	20 x 41	ECR2GLK151M◇◇△△2041	

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 105°C 100Hz	Size øD x L	ORDER CODE ◇◇ = pin style & length △△ = pitch code Details: Page 15
(V)	(µF)	(Ω)		(µA)	(mAmps)	(mm)	
450 (500) 2W	6,8	12,9	0,20	223	150	10 x 20	ECR2WLK6R8M◇◇△△1020
	10	8,8	0,20	280	320	10 x 30	ECR2WLK100M◇◇△△1030
		8,8	0,20	280	320	12,5 x 20	ECR2WLK100M◇◇△△1220
	22	4,0	0,20	496	560	10 x 40	ECR2WLK220M◇◇△△1040
		4,0	0,20	496	560	12,5 x 25	ECR2WLK220M◇◇△△1225
		4,0	0,20	496	560	16 x 25,5	ECR2WLK220M◇◇△△1625
		4,0	0,20	496	560	18 x 20,5	ECR2WLK220M◇◇△△1820
	33	2,7	0,20	694	700	10 x 50	ECR2WLK330M◇◇△△1050
		2,7	0,20	694	700	16 x 25,5	ECR2WLK330M◇◇△△1625
		2,7	0,20	694	700	18 x 25,5	ECR2WLK330M◇◇△△1825
	47	1,9	0,20	946	880	12,5 x 45	ECR2WLK470M◇◇△△1245
		1,9	0,20	946	880	16 x 31,5	ECR2WLK470M◇◇△△1631
		1,9	0,20	946	880	18 x 31,5	ECR2WLK470M◇◇△△1831
	68	1,3	0,20	1324	1130	12,5 x 50	ECR2WLK680M◇◇△△1250
		1,3	0,20	1324	1130	18 x 31,5	ECR2WLK680M◇◇△△1831
	82	1,1	0,20	1576	1160	12,5 x 61	ECR2WLK820M◇◇△△1261
		1,1	0,20	1576	1160	18 x 36	ECR2WLK820M◇◇△△1836
	100	0,90	0,20	1900	1360	18 x 40	ECR2WLK101M◇◇△△1840
120	0,75	0,20	2260	1560	18 x 46	ECR2WLK121M◇◇△△1846	
150	0,60	0,20	2800	1880	22 x 41	ECR2WLK151M◇◇△△2241	

Customer specific products and adaptations on request.



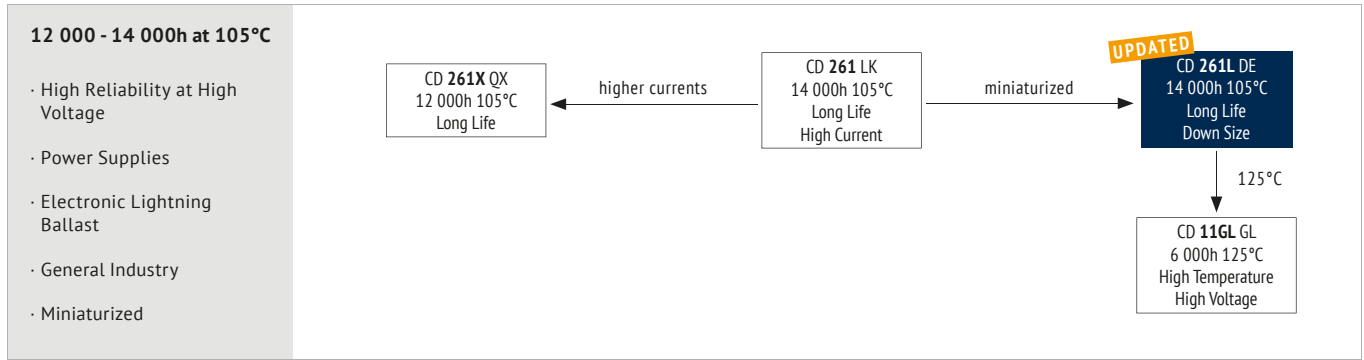

## ITEM CHARACTERISTICS

Operating Temperature Range (°C)	-40 ~ +105
Voltage Range (V)	160 ~ 450
Capacitance Range (µF)	10 ~ 820
Capacitance Tolerance (20°C, 120Hz)	± 20%

**!** The usage at lower temperatures than indicated may be possible. Please contact the Jianghai Europe sales office for approval.

Leakage Current (µA) After 1 minute at 20°C application of rated voltage, leakage current is not more than specified in table.

Stability at Low Temperature (Impedance Ratio at 120Hz)	Rated Voltage (V)	160	200	250	350	400	420	450
	$Z_{-25°C} / Z_{+20°C}$		3		4	6		
$Z_{-40°C} / Z_{+20°C}$		6			8			


ITEM	USEFUL LIFE	LOAD LIFE	ENDURANCE TEST	SHELF LIFE
Lifetime	L ≤ 20,5 : 12 000h L ≥ 25 : 14 000h	> 100 000h	L ≤ 20,5 : 10 000h L ≥ 25 : 12 000h	L ≤ 20,5 : 10 000h L ≥ 25 : 12 000h
Leakage Current	Not more than specified value		Not more than specified value	Not more than specified value
Capacitance Change	Within ± 30% of initial value		Within ± 20% of initial value	Within ± 20% of initial value
Dissipation Factor	Not more than 300% of specified value		Not more than 200% of specified value	Not more than 200% of specified value
Condition:				
Applied Voltage	$U_R$	$U_R$	$U_R$	$U_R = 0$
Applied Current	$I_R$	$1,4 \times I_R$	$I_R$	$I_R = 0$
Applied Temperature	105°C	60°C	105°C	105°C
			IEC 60384	After test: $U_R$ to be applied for 30 min > 24h before measurement

## MULTIPLIER FOR RIPPLE CURRENT (FREQUENCY COEFFICIENT)

Capacitance (µF) \ Frequency	50/60Hz	120Hz	500Hz	1kHz	10kHz	100kHz
10 ~ 82	0,32	0,40	0,52	0,60	0,84	1,00
100 ~ 220	0,36	0,44	0,58	0,67	0,93	1,00
270 ~ 820	0,40	0,50	0,65	0,75	0,95	1,00

Multipliers for typical operating conditions.

## MULTIPLIER FOR LIFETIME (LIFETIME DIAGRAM)

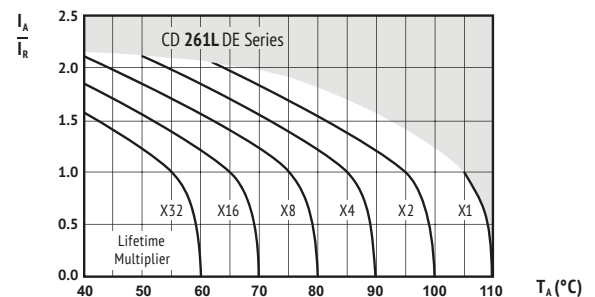

$I_A$  = actual ripple current at 100kHz,  
 $I_R$  = rated ripple current at 100kHz, 105°C  
 Multiplier of Useful Life as a function of ambient temperature & ripple current load

## ENVIRONMENTAL

The products are RoHS, WEEE and RECh compliant. The detailed version please see separate "Environmental Certificates" document or [www.jianghai-europe.com](http://www.jianghai-europe.com)

## ! SAFETY FACTOR

This diagram includes a safety margin. In many cases the allowed current capability/lifetime may be increased. For details and approvals please contact the Jianghai Europe sales office.

RADIAL



RADIAL

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 105°C 100Hz	Size øD x L	ORDER CODE ◇◇ = pin style & length △△ = pitch code Details: Page 15
(V)	(µF)	(Ω)		(µA)	(mArms)	(mm)	
160 (200) 2C	47	1,69	0,15	401	650	10 x 16	ECR2CDE470M◇◇△△1016
	68	1,17	0,15	536	800	10 x 20	ECR2CDE680M◇◇△△1020
	82	0,970	0,15	625	1038	10 x 25	ECR2CDE820M◇◇△△1025
	100	0,800	0,15	740	1193	10 x 30	ECR2CDE101M◇◇△△1030
		0,800	0,15	740	1350	12,5 x 20	ECR2CDE101M◇◇△△1220
	120	0,660	0,15	868	1395	10 x 35	ECR2CDE121M◇◇△△1035
		0,530	0,15	1060	1575	10 x 40	ECR2CDE151M◇◇△△1040
	150	0,530	0,15	1060	1643	12,5 x 25	ECR2CDE151M◇◇△△1225
		0,440	0,15	1252	1800	10 x 50	ECR2CDE181M◇◇△△1050
	180	0,440	0,15	1252	1958	12,5 x 30	ECR2CDE181M◇◇△△1230
		0,440	0,15	1252	1800	16 x 20	ECR2CDE181M◇◇△△1620
	220	0,360	0,15	1508	2250	12,5 x 35	ECR2CDE221M◇◇△△1235
		0,360	0,15	1508	2250	16 x 25,5	ECR2CDE221M◇◇△△1625
		0,360	0,15	1508	2228	18 x 20,5	ECR2CDE221M◇◇△△1820
	270	0,290	0,15	1828	2240	12,5 x 40	ECR2CDE271M◇◇△△1240
		0,290	0,15	1828	2420	16 x 31,5	ECR2CDE271M◇◇△△1631
	330	0,240	0,15	2212	2800	12,5 x 50	ECR2CDE331M◇◇△△1250
		0,240	0,15	2212	2700	16 x 31,5	ECR2CDE331M◇◇△△1631
		0,240	0,15	2212	2360	18 x 25,5	ECR2CDE331M◇◇△△1825
	390	0,200	0,15	2596	2760	16 x 36	ECR2CDE391M◇◇△△1636
470	0,170	0,15	3108	3100	16 x 40	ECR2CDE471M◇◇△△1640	
	0,170	0,15	3108	3100	18 x 31,5	ECR2CDE471M◇◇△△1831	
560	0,140	0,15	3684	3720	16 x 50	ECR2CDE561M◇◇△△1650	
	0,140	0,15	3684	3680	18 x 40	ECR2CDE561M◇◇△△1840	
680	0,120	0,15	4452	4260	18 x 45	ECR2CDE681M◇◇△△1845	
820	0,100	0,15	5348	4460	18 x 50	ECR2CDE821M◇◇△△1850	

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 105°C 100Hz	Size øD x L	ORDER CODE ◇◇ = pin style & length △△ = pitch code Details: Page 15
(V)	(µF)	(Ω)		(µA)	(mArms)	(mm)	
200 (250) 2D	33	2,41	0,15	364	650	10 x 16	ECR2DDE330M◇◇△△1016
	47	1,69	0,15	476	800	10 x 20	ECR2DDE470M◇◇△△1020
	56	1,42	0,15	548	1038	10 x 25	ECR2DDE560M◇◇△△1025
	68	1,17	0,15	644	1075	10 x 25	ECR2DDE680M◇◇△△1025
		1,17	0,15	644	1350	12,5 x 20	ECR2DDE680M◇◇△△1220
	82	0,970	0,15	756	1250	10 x 30	ECR2DDE820M◇◇△△1030
	100	0,800	0,15	900	1440	10 x 35	ECR2DDE101M◇◇△△1035
	120	0,664	0,15	1060	1665	10 x 40	ECR2DDE121M◇◇△△1040
		0,664	0,15	1060	1631	12,5 x 30	ECR2DDE121M◇◇△△1230
	150	0,532	0,15	1300	1755	10 x 45	ECR2DDE151M◇◇△△1045
		0,532	0,15	1300	1800	12,5 x 35	ECR2DDE151M◇◇△△1235
	180	0,444	0,15	1540	2070	12,5 x 35	ECR2DDE181M◇◇△△1235
		0,444	0,15	1540	2025	16 x 25,5	ECR2DDE181M◇◇△△1625
	220	0,360	0,15	1860	2263	12,5 x 45	ECR2DDE221M◇◇△△1245
		0,360	0,15	1860	2430	16 x 31,5	ECR2DDE221M◇◇△△1631
	270	0,290	0,15	2260	2520	12,5 x 50	ECR2DDE271M◇◇△△1250
		0,290	0,15	2260	2360	16 x 31,5	ECR2DDE271M◇◇△△1631
	330	0,240	0,15	2740	2860	16 x 40	ECR2DDE331M◇◇△△1640
		0,240	0,15	2740	2600	18 x 31,5	ECR2DDE331M◇◇△△1831
	390	0,204	0,15	3220	3100	16 x 45	ECR2DDE391M◇◇△△1645
0,204		0,15	3220	2860	18 x 36	ECR2DDE391M◇◇△△1836	
470	0,168	0,15	3860	3360	16 x 50	ECR2DDE471M◇◇△△1650	
	0,168	0,15	3860	3240	18 x 40	ECR2DDE471M◇◇△△1840	
560	0,144	0,15	4580	3540	18 x 45	ECR2DDE561M◇◇△△1845	

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 105°C 100Hz	Size øD x L	ORDER CODE ◇◇ = pin style & length △△ = pitch code Details: Page 15
(V)	(µF)	(Ω)		(µA)	(mArms)	(mm)	
250 (300) 2E	22	3,62	0,15	320	650	10 x 16	ECR2EDE220M◇◇△△1016
	33	2,41	0,15	430	800	10 x 20	ECR2EDE330M◇◇△△1020
	47	1,69	0,15	570	975	10 x 25	ECR2EDE470M◇◇△△1025
		1,69	0,15	570	1100	10 x 30	ECR2EDE470M◇◇△△1030
	56	1,42	0,15	660	1350	12,5 x 20	ECR2EDE560M◇◇△△1220
	68	1,17	0,15	780	1250	10 x 35	ECR2EDE680M◇◇△△1035
		0,972	0,15	920	1425	10 x 40	ECR2EDE820M◇◇△△1040
	82	0,972	0,15	920	1425	12,5 x 25	ECR2EDE820M◇◇△△1225
		0,796	0,15	1100	1620	10 x 45	ECR2EDE101M◇◇△△1045
	100	0,796	0,15	1100	1553	12,5 x 30	ECR2EDE101M◇◇△△1230
		0,796	0,15	1100	1800	16 x 20	ECR2EDE101M◇◇△△1620

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 105°C 100Hz	Size øD x L	ORDER CODE ◇◇ = pin style & length △△ = pitch code Details: Page 15
(V)	(µF)	(Ω)		(µA)	(mArms)	(mm)	
250 (300) 2E	120	0,664	0,15	1300	1755	10 x 50	ECR2EDE121M◇◇△△1050
		0,664	0,15	1300	1778	12,5 x 35	ECR2EDE121M◇◇△△1235
		0,664	0,15	1300	2250	18 x 20,5	ECR2EDE121M◇◇△△1820
	150	0,532	0,15	1600	2070	12,5 x 40	ECR2EDE151M◇◇△△1240
		0,532	0,15	1600	1958	16 x 31,5	ECR2EDE151M◇◇△△1631
	180	0,444	0,15	1900	2183	12,5 x 50	ECR2EDE181M◇◇△△1250
		0,444	0,15	1900	2138	16 x 31,5	ECR2EDE181M◇◇△△1631
		0,444	0,15	1900	2070	18 x 25,5	ECR2EDE181M◇◇△△1825
	220	0,360	0,15	2300	2475	16 x 36	ECR2EDE221M◇◇△△1636
		0,360	0,15	2300	2475	18 x 31,5	ECR2EDE221M◇◇△△1831
	270	0,290	0,15	2800	2540	16 x 40	ECR2EDE271M◇◇△△1640
		0,290	0,15	2800	2520	18 x 36	ECR2EDE271M◇◇△△1836
330	0,240	0,15	3400	2960	16 x 50	ECR2EDE331M◇◇△△1650	
	0,240	0,15	3400	2900	18 x 40	ECR2EDE331M◇◇△△1840	
390	0,204	0,15	4000	3180	18 x 45	ECR2EDE391M◇◇△△1845	
470	0,168	0,15	4800	3660	18 x 50	ECR2EDE471M◇◇△△1850	

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 105°C 100Hz	Size øD x L	ORDER CODE ◇◇ = pin style & length △△ = pitch code Details: Page 15
(V)	(µF)	(Ω)		(µA)	(mArms)	(mm)	
350 (400) 2V	12	6,63	0,20	268	338	10 x 16	ECR2VDE120M◇◇△△1016
	22	3,62	0,20	308	500	10 x 20	ECR2VDE220M◇◇△△1020
	27	2,95	0,20	478	775	10 x 25	ECR2VDE270M◇◇△△1025
	33	2,41	0,20	562	825	10 x 30	ECR2VDE330M◇◇△△1030
		2,41	0,20	562	850	12,5 x 20	ECR2VDE330M◇◇△△1220
	39	2,04	0,20	646	975	10 x 35	ECR2VDE390M◇◇△△1035
	47	1,69	0,20	758	1125	10 x 40	ECR2VDE470M◇◇△△1040
		1,69	0,20	758	1125	12,5 x 25	ECR2VDE470M◇◇△△1225
	56	1,42	0,20	884	1300	10 x 45	ECR2VDE560M◇◇△△1045
		1,42	0,20	884	1375	12,5 x 30	ECR2VDE560M◇◇△△1230
	68	1,17	0,20	1052	1500	10 x 50	ECR2VDE680M◇◇△△1050
		1,17	0,20	1052	1525	12,5 x 35	ECR2VDE680M◇◇△△1235
82	0,969	0,20	1248	1775	12,5 x 40	ECR2VDE820M◇◇△△1240	
	0,969	0,20	1248	1625	16 x 25,5	ECR2VDE820M◇◇△△1625	
100	0,795	0,20	1500	1778	12,5 x 45	ECR2VDE101M◇◇△△1245	
	0,795	0,20	1500	1733	16 x 31,5	ECR2VDE101M◇◇△△1631	
120	0,663	0,20	1780	1913	12,5 x 50	ECR2VDE121M◇◇△△1250	
	0,663	0,20	1780	2003	16 x 36	ECR2VDE121M◇◇△△1636	
150	0,531	0,20	2200	2250	16 x 40	ECR2VDE151M◇◇△△1640	
	0,531	0,20	2200	2025	18 x 31,5	ECR2VDE151M◇◇△△1831	
180	0,441	0,20	2620	2520	16 x 50	ECR2VDE181M◇◇△△1650	
	0,441	0,20	2620	2340	18 x 40	ECR2VDE181M◇◇△△1840	
220	0,363	0,20	3180	2700	18 x 45	ECR2VDE221M◇◇△△1845	
270	0,294	0,20	3880	2800	18 x 50	ECR2VDE271M◇◇△△1850	

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 105°C 100Hz	Size øD x L	ORDER CODE ◇◇ = pin style & length △△ = pitch code Details: Page 15
(V)	(µF)	(Ω)		(µA)	(mArms)	(mm)	
400 (450) 2G	10	7,96	0,20	260	313	10 x 16	ECR2GDE100M◇◇△△1016
	18	4,42	0,20	388	550	10 x 20	ECR2GDE180M◇◇△△1020
	22	3,62	0,20	452	600	10 x 25	ECR2GDE220M◇◇△△1025
	27	2,95	0,20	532	725	10 x 30	ECR2GDE270M◇◇△△1030
		2,95	0,20	532	850	12,5 x 20	ECR2GDE270M◇◇△△1220
	33	2,41	0,20	628	850	10 x 35	ECR2GDE330M◇◇△△1035
		2,04	0,20	724	975	10 x 40	ECR2GDE390M◇◇△△1040
	39	2,04	0,20	724	975	12,5 x 25	ECR2GDE390M◇◇△△1225
		1,69	0,20	852	1100	10 x 45	ECR2GDE470M◇◇△△1045
	47	1,69	0,20	852	1138	12,5 x 30	ECR2GDE470M◇◇△△1230
		1,69	0,20	852	1175	16 x 20	ECR2GDE470M◇◇△△1620
	56	1,42	0,20	996	1250	10 x 50	ECR2GDE560M◇◇△△1050
1,42		0,20	996	1313	12,5 x 35	ECR2GDE560M◇◇△△1235	
68	1,17	0,20	1188	1500	12,5 x 40	ECR2GDE680	

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 105°C 100kHz	Size øD x L	ORDER CODE ◇◇ = pin style & length △△ = pitch code
(V)	(µF)	(Ω)		(µA)	(mAmps)	(mm)	Details: Page 15
<b>400</b> <b>(450)</b> <b>2G</b>	120	0,663	0,20	2020	1935	16 x 40	ECR2GDE121M◇◇△△1640
		0,663	0,20	2020	1890	18 x 31,5	ECR2GDE121M◇◇△△1831
		0,663	0,20	2020	1958	18 x 36	ECR2GDE121M◇◇△△1836
	150	0,531	0,20	2500	2239	16 x 50	ECR2GDE151M◇◇△△1650
		0,531	0,20	2500	2216	18 x 40	ECR2GDE151M◇◇△△1840
		0,441	0,20	2980	2464	18 x 45	ECR2GDE181M◇◇△△1845
220	0,363	0,20	3620	2745	18 x 50	ECR2GDE221M◇◇△△1850	


U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 105°C 100kHz	Size øD x L	ORDER CODE ◇◇ = pin style & length △△ = pitch code					
(V)	(µF)	(Ω)		(µA)	(mAmps)	(mm)	Details: Page 15					
<b>420</b> <b>(470)</b> <b>2X</b>	15	5,31	0,20	352	475	10 x 20	ECR2XDE150M◇◇△△1020					
	18	4,42	0,20	403	575	10 x 25	ECR2XDE180M◇◇△△1025					
22	2,95	0,20	554	725	10 x 30	ECR2XDE270M◇◇△△1030						
							2,95	0,20	554	750	12,5 x 20	ECR2XDE270M◇◇△△1220
27	2,95	0,20	554	850	12,5 x 25	ECR2XDE270M◇◇△△1225						
							2,41	0,20	655	850	10 x 35	ECR2XDE330M◇◇△△1035
33	2,41	0,20	655	875	12,5 x 25	ECR2XDE330M◇◇△△1225						
							2,41	0,20	655	1000	12,5 x 30	ECR2XDE330M◇◇△△1230
39	2,04	0,20	756	975	10 x 40	ECR2XDE390M◇◇△△1040						
							2,04	0,20	756	1000	16 x 20	ECR2XDE390M◇◇△△1620
47	1,69	0,20	890	1100	10 x 45	ECR2XDE470M◇◇△△1045						
							1,69	0,20	890	1100	12,5 x 30	ECR2XDE470M◇◇△△1230
							1,69	0,20	890	1263	12,5 x 35	ECR2XDE470M◇◇△△1235
56	1,42	0,20	1041	1275	12,5 x 35	ECR2XDE560M◇◇△△1235						
							1,42	0,20	1041	1425	12,5 x 40	ECR2XDE560M◇◇△△1240
							1,42	0,20	1041	1275	16 x 25,5	ECR2XDE560M◇◇△△1625
68	1,42	0,20	1041	1200	18 x 20,5	ECR2XDE560M◇◇△△1820						
							1,17	0,20	1243	1500	12,5 x 45	ECR2XDE680M◇◇△△1245
82	0,969	0,20	1478	1725	12,5 x 50	ECR2XDE680M◇◇△△1250						
							1,17	0,20	1243	1675	12,5 x 50	ECR2XDE680M◇◇△△1250
							1,17	0,20	1243	1400	16 x 31,5	ECR2XDE680M◇◇△△1631
100	0,969	0,20	1478	1725	16 x 36	ECR2XDE820M◇◇△△1636						
							1,17	0,20	1243	1538	18 x 25,5	ECR2XDE680M◇◇△△1825
							0,969	0,20	1478	1725	12,5 x 50	ECR2XDE820M◇◇△△1250
							0,969	0,20	1478	1600	16 x 31,5	ECR2XDE820M◇◇△△1631
120	0,795	0,20	1780	1800	16 x 40	ECR2XDE101M◇◇△△1640						
							0,969	0,20	1478	1725	16 x 36	ECR2XDE820M◇◇△△1636
							0,969	0,20	1478	1600	18 x 25,5	ECR2XDE820M◇◇△△1825
150	0,795	0,20	1780	1879	18 x 36	ECR2XDE101M◇◇△△1836						
							0,969	0,20	1478	1825	18 x 31,5	ECR2XDE820M◇◇△△1831
							0,663	0,20	2116	2070	16 x 45	ECR2XDE121M◇◇△△1645
180	0,663	0,20	2116	1913	18 x 36	ECR2XDE121M◇◇△△1836						
							0,663	0,20	2116	2093	18 x 40	ECR2XDE121M◇◇△△1840
							0,531	0,20	2620	2115	16 x 50	ECR2XDE151M◇◇△△1650
450 (500) 2W	1,42	0,20	1108	1350	12,5 x 40	ECR2WDE560M◇◇△△1240						
							1,42	0,20	1108	1475	12,5 x 45	ECR2WDE560M◇◇△△1245
							1,42	0,20	1108	1463	16 x 31,5	ECR2WDE560M◇◇△△1631
56	1,42	0,20	1108	1400	18 x 25,5	ECR2WDE560M◇◇△△1825						
							1,17	0,20	1324	1675	12,5 x 50	ECR2WDE680M◇◇△△1250
							1,17	0,20	1324	1525	16 x 31,5	ECR2WDE680M◇◇△△1631
68	1,17	0,20	1324	1650	16 x 36	ECR2WDE680M◇◇△△1636						
							1,17	0,20	1324	1650	16 x 36	ECR2WDE680M◇◇△△1636
							1,17	0,20	1324	1525	18 x 25,5	ECR2WDE680M◇◇△△1825
82	0,969	0,20	1576	1875	16 x 40	ECR2WDE820M◇◇△△1640						
							0,969	0,20	1576	1825	18 x 31,5	ECR2WDE820M◇◇△△1831
100	0,795	0,20	1900	1890	16 x 45	ECR2WDE101M◇◇△△1645						
							0,795	0,20	1900	1879	18 x 36	ECR2WDE101M◇◇△△1836
120	0,663	0,20	2260	2093	18 x 40	ECR2WDE121M◇◇△△1840						
							0,663	0,20	2260	2126	18 x 45	ECR2WDE121M◇◇△△1845
150	0,531	0,20	2800	2385	18 x 50	ECR2WDE151M◇◇△△1850						

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 105°C 100kHz	Size øD x L	ORDER CODE ◇◇ = pin style & length △△ = pitch code					
(V)	(µF)	(Ω)		(µA)	(mAmps)	(mm)	Details: Page 15					
<b>450</b> <b>(500)</b> <b>2W</b>	10	7,96	0,20	280	325	10 x 16	ECR2WDE100M◇◇△△1016					
	15	5,31	0,20	370	475	10 x 20	ECR2WDE150M◇◇△△1020					
18	5,31	0,20	370	525	10 x 25	ECR2WDE150M◇◇△△1025						
							4,42	0,20	424	575	10 x 25	ECR2WDE180M◇◇△△1025
22	3,62	0,20	496	675	10 x 30	ECR2WDE220M◇◇△△1030						
							3,62	0,20	496	700	12,5 x 20	ECR2WDE220M◇◇△△1220
27	2,95	0,20	586	800	10 x 35	ECR2WDE270M◇◇△△1035						
							2,95	0,20	586	850	12,5 x 25	ECR2WDE270M◇◇△△1225
33	2,41	0,20	694	900	10 x 40	ECR2WDE330M◇◇△△1040						
							2,41	0,20	694	1000	12,5 x 30	ECR2WDE330M◇◇△△1230
39	2,41	0,20	694	900	16 x 20	ECR2WDE330M◇◇△△1620						
							2,04	0,20	802	1025	10 x 50	ECR2WDE390M◇◇△△1050
47	2,04	0,20	802	1075	12,5 x 30	ECR2WDE390M◇◇△△1230						
							2,04	0,20	802	1150	12,5 x 35	ECR2WDE390M◇◇△△1235
							2,04	0,20	802	1000	16 x 25,5	ECR2WDE390M◇◇△△1625
56	1,69	0,20	946	1200	12,5 x 35	ECR2WDE470M◇◇△△1235						
							1,69	0,20	946	1313	12,5 x 40	ECR2WDE470M◇◇△△1240
							1,69	0,20	946	1250	16 x 25,5	ECR2WDE470M◇◇△△1625
180	1,69	0,20	946	1150	18 x 20,5	ECR2WDE470M◇◇△△1820						


U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 105°C 100kHz	Size øD x L	ORDER CODE ◇◇ = pin style & length △△ = pitch code					
(V)	(µF)	(Ω)		(µA)	(mAmps)	(mm)	Details: Page 15					
<b>450</b> <b>(500)</b> <b>2W</b>	56	1,42	0,20	1108	1350	12,5 x 40	ECR2WDE560M◇◇△△1240					
		1,42	0,20	1108	1475	12,5 x 45	ECR2WDE560M◇◇△△1245					
68	1,42	0,20	1108	1463	16 x 31,5	ECR2WDE560M◇◇△△1631						
							1,42	0,20	1108	1400	18 x 25,5	ECR2WDE560M◇◇△△1825
							1,17	0,20	1324	1675	12,5 x 50	ECR2WDE680M◇◇△△1250
	1,17	0,20	1324	1525	16 x 31,5	ECR2WDE680M◇◇△△1631						
							1,17	0,20	1324	1650	16 x 36	ECR2WDE680M◇◇△△1636
							1,17	0,20	1324	1525	18 x 25,5	ECR2WDE680M◇◇△△1825
82	0,969	0,20	1576	1875	16 x 40	ECR2WDE820M◇◇△△1640						
							0,969	0,20	1576	1825	18 x 31,5	ECR2WDE820M◇◇△△1831
100	0,795	0,20	1900	1890	16 x 45	ECR2WDE101M◇◇△△1645						
							0,795	0,20	1900	1879	18 x 36	ECR2WDE101M◇◇△△1836
120	0,663	0,20	2260	2093	18 x 40	ECR2WDE121M◇◇△△1840						
							0,663	0,20	2260	2126	18 x 45	ECR2WDE121M◇◇△△1845
150	0,531	0,20	2800	2385	18 x 50	ECR2WDE151M◇◇△△1850						

### TYPICAL CURVES


Impedance/ESR  
in OHMS

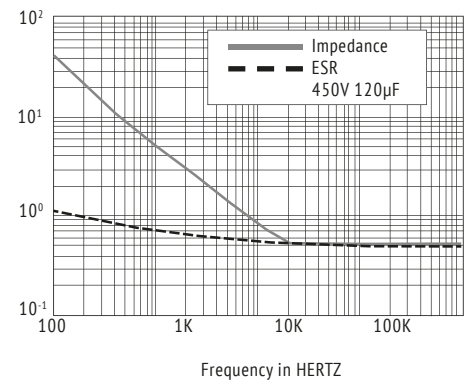

Impedance/ESR  
in OHMS

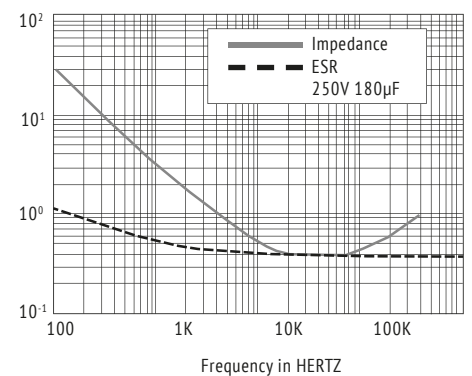

RADIAL

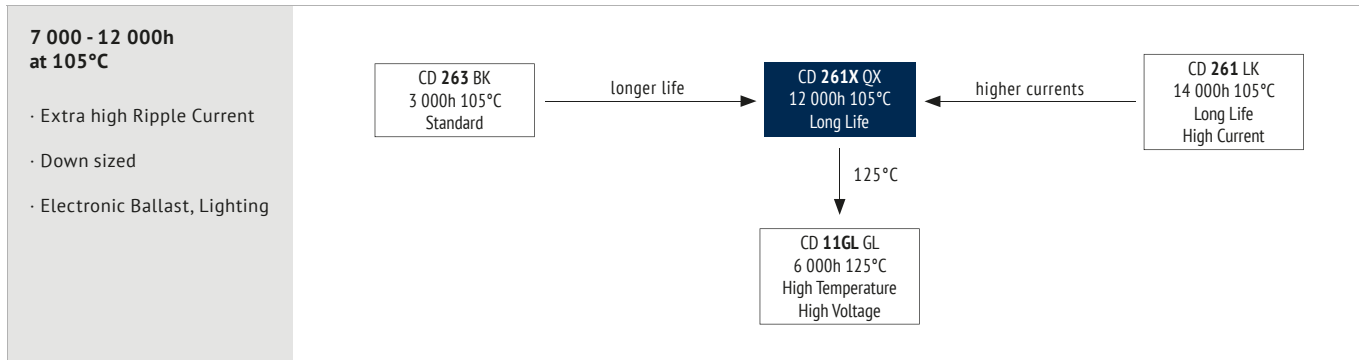

**ITEM CHARACTERISTICS**

Operating Temperature Range (°C)	-40 ~ +105 (for 550V: -25 ~ +105)
Voltage Range (V)	160 ~ 550
Capacitance Range (µF)	1 ~ 220
Capacitance Tolerance (20°C, 120Hz)	± 20%

**!** The usage at lower temperatures than indicated may be possible. Please contact the Jianghai Europe sales office for approval.

Leakage Current (µA) After 1 minute at 20°C application of rated voltage, leakage current is not more than specified in table.

Stability at Low Temperature (Impedance Ratio at 120Hz)	Rated Voltage (V)	160	200	250	350	400	450	500	550
$Z_{-25°C} / Z_{+20°C}$			3				6		
$Z_{-40°C} / Z_{+20°C}$			6			8		10	-


ITEM	USEFUL LIFE	LOAD LIFE	ENDURANCE TEST	SHELF LIFE	
Lifetime	Ø 6,3 : 7 000h Ø 8-10 : 10 000h Ø ≥ 12,5 : 12 000h	> 100 000h	Ø 6,3 : 5 000h Ø 8-10 : 8 000h Ø ≥ 12,5 : 10 000h	Ø 6,3 : 7 000h Ø 8-10 : 10 000h Ø ≥ 12,5 : 12 000h	1 000h
Leakage Current	Not more than specified value	Not more than specified value	Not more than specified value	Not more than specified value	
Capacitance Change	Within ± 30% of initial value	Within ± 20% of initial value	Within ± 20% of initial value	Within ± 20% of initial value	
Dissipation Factor	Not more than 300% of specified value	Not more than 200% of specified value	Not more than 200% of specified value	Not more than 200% of specified value	
Condition:					
Applied Voltage	$U_R$	$U_R$	$U_R$	$U_R = 0$	
Applied Current	$I_R$	$1,6 \times I_R$	$I_R$	$I_R = 0$	
Applied Temperature	105°C	50°C	105°C	105°C	
			IEC 60384	After test: $U_R$ to be applied for 30 min > 24h before measurement	

**MULTIPLIER FOR RIPPLE CURRENT (FREQUENCY COEFFICIENT)**

Capacitance (µF) \ Frequency	120Hz	1kHz	10kHz	100kHz
1 ~ 5,6	0,20	0,40	0,80	1,00
6,8 ~ 15	0,30	0,60	0,90	1,00
22 ~ 82	0,40	0,70	0,90	1,00
100 ~ 220	0,45	0,75	0,90	1,00

Multipliers for typical operating conditions.

**MULTIPLIER FOR LIFETIME (LIFETIME DIAGRAM)**

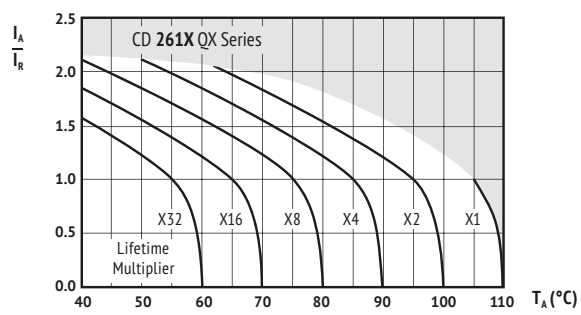

$I_A$  = actual ripple current at 100kHz,  
 $I_R$  = rated ripple current at 100kHz, 105°C  
 Multiplier of Useful Life as a function of ambient temperature & ripple current load

**ENVIRONMENTAL**

The products are RoHS, WEEE and REACH compliant. The detailed version please see separate "Environmental Certificates" document or [www.jianghai-europe.com](http://www.jianghai-europe.com)

**! SAFETY FACTOR**

This diagram includes a safety margin. In many cases the allowed current capability/lifetime may be increased. For details and approvals please contact the Jianghai Europe sales office.

RADIAL

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 105°C 100kHz	Size øD x L	ORDER CODE ◇◇ = pin style & length △△ = pitch code Details: Page 15
(V)	(µF)	(Ω)		(µA)	(mA <sub>rms</sub> )	(mm)	
<b>160</b> <b>(200)</b> <b>2C</b>	10	8,0	0,15	164	320	10 x 16	ECR2CQX100M◇◇△△1016
	22	3,6	0,15	241	500	10 x 20	ECR2CQX220M◇◇△△1020
	33	2,4	0,15	312	650	10 x 20	ECR2CQX330M◇◇△△1020
	47	1,7	0,15	401	750	10 x 20	ECR2CQX470M◇◇△△1020
	68	1,2	0,15	536	1180	12,5 x 20	ECR2CQX680M◇◇△△1220
		1,2	0,15	536	1180	16 x 20	ECR2CQX680M◇◇△△1620
	100	0,80	0,15	740	1420	12,5 x 25	ECR2CQX101M◇◇△△1225
		0,80	0,15	740	1420	16 x 20	ECR2CQX101M◇◇△△1620
	150	0,50	0,15	1060	1890	16 x 25,5	ECR2CQX151M◇◇△△1625
	220	0,40	0,15	1508	2370	18 x 25,5	ECR2CQX221M◇◇△△1825

<b>200</b> <b>(250)</b> <b>2D</b>	4,7	16,9	0,15	138	160	8 x 11,5	ECR2DQX4R7M◇◇△△0811
		16,9	0,15	138	200	10 x 12,5	ECR2DQX4R7M◇◇△△1012
	6,8	11,7	0,15	155	220	10 x 16	ECR2DQX6R8M◇◇△△1016
	10	8,0	0,15	180	320	10 x 16	ECR2DQX100M◇◇△△1016
	22	3,6	0,15	276	500	10 x 20	ECR2DQX220M◇◇△△1020
	33	2,4	0,15	364	650	10 x 20	ECR2DQX330M◇◇△△1020
	47	1,7	0,15	476	980	12,5 x 20	ECR2DQX470M◇◇△△1220
		1,2	0,15	644	1300	12,5 x 25	ECR2DQX680M◇◇△△1225
	68	1,2	0,15	644	1300	16 x 20	ECR2DQX680M◇◇△△1620
		100	0,80	0,15	900	1420	16 x 20
150	0,50	0,15	1300	1890	16 x 25,5	ECR2DQX151M◇◇△△1625	

<b>250</b> <b>(300)</b> <b>2E</b>	4,7	16,9	0,15	147	160	8 x 11,5	ECR2EQX4R7M◇◇△△0811
		16,9	0,15	147	200	10 x 12,5	ECR2EQX4R7M◇◇△△1012
	6,8	11,7	0,15	168	250	10 x 12,5	ECR2EQX6R8M◇◇△△1012
	10	8,0	0,15	200	320	10 x 16	ECR2EQX100M◇◇△△1016
	22	3,6	0,15	320	470	10 x 16	ECR2EQX220M◇◇△△1016
		3,6	0,15	320	500	10 x 20	ECR2EQX220M◇◇△△1020
	33	2,4	0,15	430	760	12,5 x 16	ECR2EQX330M◇◇△△1216
		2,4	0,15	430	800	12,5 x 20	ECR2EQX330M◇◇△△1220
	47	1,7	0,15	570	980	12,5 x 20	ECR2EQX470M◇◇△△1220
		1,2	0,15	780	1300	12,5 x 25	ECR2EQX680M◇◇△△1225
68	1,2	0,15	780	1300	16 x 20	ECR2EQX680M◇◇△△1620	
	100	0,80	0,15	1100	1530	16 x 25,5	ECR2EQX101M◇◇△△1625
150	0,50	0,15	1600	1960	18 x 25,5	ECR2EQX151M◇◇△△1825	

<b>350</b> <b>(400)</b> <b>2V</b>	1,5	53,1	0,20	121	80	6,3 x 11,5	ECR2VQX1R5M◇◇△△0611
		53,1	0,20	121	90	8 x 11,5	ECR2VQX1R5M◇◇△△0811
		53,1	0,20	121	100	10 x 12,5	ECR2VQX1R5M◇◇△△1012
	2,2	36,2	0,20	131	120	8 x 11,5	ECR2VQX2R2M◇◇△△0811
		36,2	0,20	131	140	10 x 12,5	ECR2VQX2R2M◇◇△△1012
	3,3	24,1	0,20	147	150	8 x 11,5	ECR2VQX3R3M◇◇△△0811
		24,1	0,20	147	180	10 x 12,5	ECR2VQX3R3M◇◇△△1012
	4,7	16,9	0,20	166	150	10 x 12,5	ECR2VQX4R7M◇◇△△1012
		16,9	0,20	166	220	10 x 16	ECR2VQX4R7M◇◇△△1016
	5,6	14,2	0,20	179	180	10 x 12,5	ECR2VQX5R6M◇◇△△1012
		14,2	0,20	179	250	10 x 16	ECR2VQX5R6M◇◇△△1016
	6,8	11,7	0,20	196	280	10 x 16	ECR2VQX6R8M◇◇△△1016
	10	8,0	0,20	240	350	10 x 20	ECR2VQX100M◇◇△△1020
	22	3,6	0,20	408	650	12,5 x 20	ECR2VQX220M◇◇△△1220
	33	2,4	0,20	562	900	16 x 20	ECR2VQX330M◇◇△△1620
	47	1,7	0,20	758	1080	16 x 20	ECR2VQX470M◇◇△△1620
	68	1,2	0,20	1052	1470	18 x 25,5	ECR2VQX680M◇◇△△1825
	82	1,0	0,20	1248	1530	18 x 25,5	ECR2VQX820M◇◇△△1825

<b>400</b> <b>(450)</b> <b>2G</b>	1,0	80,0	0,20	116	50	6,3 x 11,5	ECR2GQX010M◇◇△△0611
		80,0	0,20	116	60	8 x 11,5	ECR2GQX010M◇◇△△0811
		80,0	0,20	116	70	10 x 12,5	ECR2GQX010M◇◇△△1012
	1,5	53,1	0,20	124	70	6,3 x 11,5	ECR2GQX1R5M◇◇△△0611
		53,1	0,20	124	80	8 x 11,5	ECR2GQX1R5M◇◇△△0811
		53,1	0,20	124	100	10 x 12,5	ECR2GQX1R5M◇◇△△1012
	2,2	36,2	0,20	136	95	8 x 11,5	ECR2GQX2R2M◇◇△△0811
		36,2	0,20	136	140	10 x 12,5	ECR2GQX2R2M◇◇△△1012
	3,3	24,1	0,20	153	150	10 x 12,5	ECR2GQX3R3M◇◇△△1012
		24,1	0,20	153	180	10 x 16	ECR2GQX3R3M◇◇△△1016
	4,7	16,9	0,20	176	220	10 x 16	ECR2GQX4R7M◇◇△△1016
	5,6	14,2	0,20	190	250	10 x 20	ECR2GQX5R6M◇◇△△1020


U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 105°C 100kHz	Size øD x L	ORDER CODE ◇◇ = pin style & length △△ = pitch code Details: Page 15
(V)	(µF)	(Ω)		(µA)	(mA <sub>rms</sub> )	(mm)	
<b>400</b> <b>(450)</b> <b>2G</b>	6,8	11,7	0,20	209	280	10 x 20	ECR2GQX6R8M◇◇△△1020
	10	8,0	0,20	260	350	10 x 20	ECR2GQX100M◇◇△△1020
	15	5,3	0,20	340	550	12,5 x 20	ECR2GQX150M◇◇△△1220
	22	3,6	0,20	452	760	12,5 x 25	ECR2GQX220M◇◇△△1225
		3,6	0,20	452	760	16 x 20	ECR2GQX220M◇◇△△1620
	33	2,4	0,20	628	900	16 x 20	ECR2GQX330M◇◇△△1620
	47	1,7	0,20	852	1180	16 x 25,5	ECR2GQX470M◇◇△△1625
		1,7	0,20	852	1180	18 x 20,5	ECR2GQX470M◇◇△△1820
	68	1,2	0,20	1188	1470	18 x 25,5	ECR2GQX680M◇◇△△1825
	82	1,0	0,20	1412	1600	18 x 31,5	ECR2GQX820M◇◇△△1831
100	0,80	0,20	1700	1780	18 x 36	ECR2GQX101M◇◇△△1836	

<b>450</b> <b>(500)</b> <b>2W</b>	2,2	36,2	0,20	140	90	8 x 11,5	ECR2WQX2R2M◇◇△△0811
		36,2	0,20	140	150	10 x 12,5	ECR2WQX2R2M◇◇△△1012
	3,3	24,1	0,20	160	180	10 x 12,5	ECR2WQX3R3M◇◇△△1012
		24,1	0,20	160	190	10 x 16	ECR2WQX3R3M◇◇△△1016
	4,7	16,9	0,20	185	212	10 x 16	ECR2WQX4R7M◇◇△△1016
		16,9	0,20	185	220	10 x 20	ECR2WQX4R7M◇◇△△1020
	5,6	14,2	0,20	201	200	10 x 16	ECR2WQX5R6M◇◇△△1016
		14,2	0,20	201	250	10 x 20	ECR2WQX5R6M◇◇△△1020
	6,8	11,7	0,20	223	230	10 x 16	ECR2WQX6R8M◇◇△△1016
		11,7	0,20	223	280	10 x 20	ECR2WQX6R8M◇◇△△1020
	10	8,0	0,20	280	300	10 x 20	ECR2WQX100M◇◇△△1020
		8,0	0,20	280	450	12,5 x 20	ECR2WQX100M◇◇△△1220
	15	5,3	0,20	370	450	12,5 x 20	ECR2WQX150M◇◇△△1220
		5,3	0,20	370	600	12,5 x 25	ECR2WQX150M◇◇△△1225
	22	3,6	0,20	496	600	12,5 x 25	ECR2WQX220M◇◇△△1225
3,6		0,20	496	730	16 x 20	ECR2WQX220M◇◇△△1620	
33	2,4	0,20	694	980	16 x 25,5	ECR2WQX330M◇◇△△1625	
47	1,7	0,20	946	1200	18 x 25,5	ECR2WQX470M◇◇△△1825	
68	1,2	0,20	1324	1575	18 x 31,5	ECR2WQX680M◇◇△△1831	
82	1,0	0,20	1576	1675	18 x 36	ECR2WQX820M◇◇△△1836	
100	0,80	0,20	1900	1730	18 x 36	ECR2WQX101M◇◇△△1836	
120	0,70	0,20	2260	1820	18 x 40	ECR2WQX121M◇◇△△1840	

<b>500</b> <b>(550)</b> <b>2H</b>	10	9,3	0,20	300	360	12,5 x 20	ECR2HQX100M◇◇△△1220
	15	6,2	0,20	400	480	12,5 x 25	ECR2HQX150M◇◇△△1225
	22	4,2	0,20	540	580	16 x 25,5	ECR2HQX220M◇◇△△1625
	33	2,8	0,20	760	720	16 x 31,5	ECR2HQX330M◇◇△△1631
	47	2,0	0,20	1040	900	18 x 31,5	ECR2HQX470M◇◇△△1831
	68	1,4	0,20	1460	1250	18 x 36	ECR2HQX680M◇◇△△1836
	82	1,1	0,20	1740	1380	20 x 41	ECR2HQX820M◇◇△△2041
	100	0,90	0,20	2100	1450	20 x 41	ECR2HQX101M◇◇△△2041
	120	0,77	0,20	2500	950	22 x 41	ECR2HQX121M◇◇△△2241

<b>550</b> <b>(600)</b> <b>2Y</b>	4,7	16,9	0,25	204	220	12,5 x 20	ECR2YQX4R7M◇◇△△1220
	22	7,5	0,25	584	210	16 x 25,5	ECR2YQX220M◇◇△△1625
	47	3,4	0,25	1134	330	18 x 36	ECR2YQX470M◇◇△△1836
	56	2,9	0,25	1332	450	18 x 45	ECR2YQX560M◇◇△△1845
	68	2,4	0,25	1596	550	18 x 50	ECR2YQX680M◇◇△△1850

RADIAL

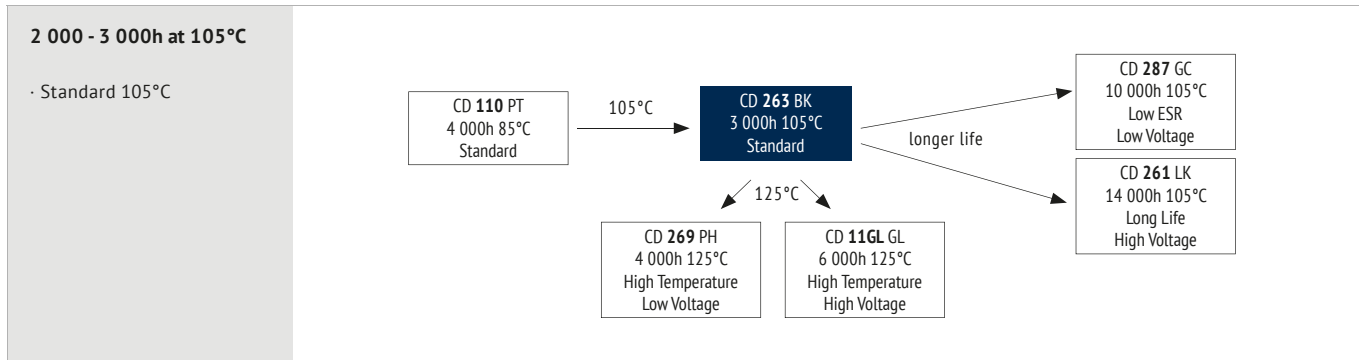

**ITEM CHARACTERISTICS**

Operating Temperature Range (°C)	-40 ~ +105	-25 ~ +105
Voltage Range (V)	6,3 ~ 250	350 ~ 500
Capacitance Range (µF)	0,1 ~ 15 000	
Capacitance Tolerance (20°C, 120Hz)	± 20%	

**!** The usage at lower temperatures than indicated may be possible. Please contact the Jianghai Europe sales office for approval.

Leakage Current	Rated Voltage (V)	6,3 ~ 100	160 ~ 500
	$I_{LEAKAGE}$	After 2 minutes at 20°C application of rated voltage, leakage current is not more than specified in table.	After 1 minute at 20°C application of rated voltage, leakage current is not more than specified in table.

Stability at Low Temperature (Impedance Ratio at 120Hz)	Rated Voltage (V)	6,3	10	16	25	35	50	63	100	160	200	250	350	400	420	450	500
	$Z_{-25°C} / Z_{+20°C}$	4	3			2							3				6
	$Z_{-40°C} / Z_{+20°C}$	8	6	4			3					-					


ITEM	USEFUL LIFE	LOAD LIFE	ENDURANCE TEST	SHELF LIFE
Lifetime	$\emptyset \leq 8 : 2\ 000h$ $\emptyset \geq 10 : 3\ 000h$	> 100 000h	$\emptyset \leq 8 : 1\ 000h$ $\emptyset \geq 10 : 2\ 000h$	2 000h 1 000h
Leakage Current	Not more than specified value		Not more than specified value	Not more than specified value
Capacitance Change	Within ± 30% of initial value		Within ± 20% of initial value	Within ± 20% of initial value
Dissipation Factor	Not more than 300% of specified value		Not more than 200% of specified value	Not more than 150% of specified value Not more than 200% of specified value
Condition: Applied Voltage Applied Current Applied Temperature	$U_R$ $I_R$ 105°C	$U_R$ $1,4 \times I_R$ 40°C	$U_R$ $I_R$ 105°C	$U_R = 0$ $I_R = 0$ 105°C IEC 60384
				After test: $U_R$ to be applied for 30 min > 24h before measurement

**MULTIPLIER FOR RIPPLE CURRENT (FREQUENCY COEFFICIENT)**

Rated Voltage (V)	Frequency Capacitance (µF)	Frequency				
		50Hz	120Hz	1kHz	10kHz	100kHz
6,3 ~ 100	0,47 ~ 4,7	0,32	0,40	0,70	0,80	1,00
	10 ~ 47	0,40	0,50	0,80	0,90	1,00
	100 ~ 220	0,56	0,70	0,90	0,90	1,00
	330 ~ 1 000	0,64	0,80	0,90	1,00	1,00
	2 200 ~ 15 000	0,72	0,90	1,00	1,00	1,00
160 ~ 500	0,47 ~ 10	0,80	1,00	1,75	2,00	2,50
	22 ~ 56	0,80	1,00	1,60	1,80	2,00
	68 ~ 220	0,80	1,00	1,30	1,40	1,65

Multipliers for typical operating conditions.

**MULTIPLIER FOR LIFETIME (LIFETIME DIAGRAM)**

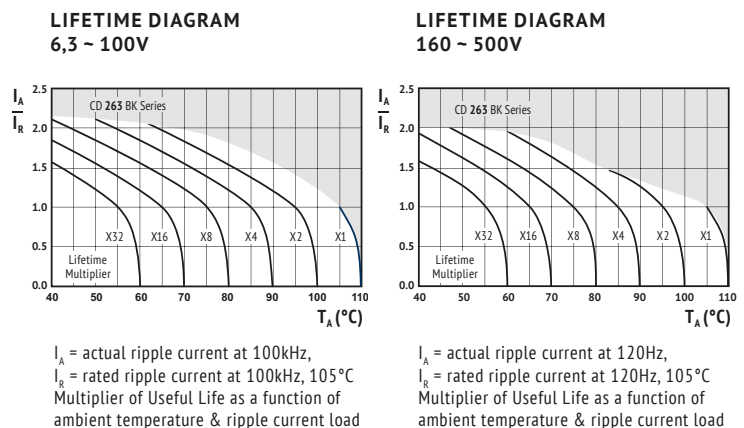

**ENVIRONMENTAL**

The products are RoHS, WEEE and REACH compliant. The detailed version please see separate "Environmental Certificates" document or [www.jianghai-europe.com](http://www.jianghai-europe.com)

**! SAFETY FACTOR**

This diagram includes a safety margin. In many cases the allowed current capability/lifetime may be increased. For details and approvals please contact the Jianghai Europe sales office.



U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance (µF)	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz (Ω)	Z <sub>max</sub> Max Impedance 20°C 100kHz (Ω)	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current (µA)	I <sub>RAC</sub> Rated Ripple Current 105°C 100kHz (mA rms)	Size øD x L (mm)	ORDER CODE
<b>6,3</b> <b>(7,2)</b> <b>0J</b>	33	8,9	2,5	0,22	3	105	5x11,5	ECROJBK330M $\diamond\diamond\Delta\Delta$ 0511
	47	6,3	1,5	0,22	3	120	5x11,5	ECROJBK470M $\diamond\diamond\Delta\Delta$ 0511
	100	3,0	1,2	0,22	7	130	5x11,5	ECROJBK101M $\diamond\diamond\Delta\Delta$ 0511
	220	1,4	1,2	0,22	14	180	5x11,5	ECROJBK221M $\diamond\diamond\Delta\Delta$ 0511
		1,4	0,87	0,22	14	180	6,3x11,5	ECROJBK221M $\diamond\diamond\Delta\Delta$ 0611
	330	0,89	0,58	0,22	21	220	6,3x11,5	ECROJBK331M $\diamond\diamond\Delta\Delta$ 0611
		0,63	0,55	0,22	30	250	6,3x11,5	ECROJBK471M $\diamond\diamond\Delta\Delta$ 0611
	470	0,63	0,39	0,22	30	315	8x11,5	ECROJBK471M $\diamond\diamond\Delta\Delta$ 0811
		0,30	0,37	0,22	63	435	8x11,5	ECROJBK102M $\diamond\diamond\Delta\Delta$ 0811
	1 000	0,30	0,23	0,22	63	500	10x12,5	ECROJBK102M $\diamond\diamond\Delta\Delta$ 1012
		0,15	0,095	0,24	139	765	10x20	ECROJBK222M $\diamond\diamond\Delta\Delta$ 1020
	2 200	0,15	0,095	0,24	139	1000	12,5x20	ECROJBK222M $\diamond\diamond\Delta\Delta$ 1220
		0,11	0,12	0,26	208	882	10x20	ECROJBK332M $\diamond\diamond\Delta\Delta$ 1020
	3 300	0,11	0,090	0,26	208	1050	12,5x20	ECROJBK332M $\diamond\diamond\Delta\Delta$ 1220
		0,080	0,090	0,28	297	1120	12,5x20	ECROJBK472M $\diamond\diamond\Delta\Delta$ 1220
4 700	0,080	0,061	0,28	297	1670	16x25	ECROJBK472M $\diamond\diamond\Delta\Delta$ 1625	
	0,063	0,090	0,32	429	1380	12,5x20	ECROJBK682M $\diamond\diamond\Delta\Delta$ 1220	
6 800	0,063	0,056	0,32	429	1740	16x25	ECROJBK682M $\diamond\diamond\Delta\Delta$ 1625	
	0,054	0,045	0,40	630	2110	16x31,5	ECROJBK103M $\diamond\diamond\Delta\Delta$ 1631	
10 000	0,054	0,061	0,40	630	1750	16x25	ECROJBK103M $\diamond\diamond\Delta\Delta$ 1625	
	0,045	0,042	0,50	945	2040	16x35,5	ECROJBK153M $\diamond\diamond\Delta\Delta$ 1635	
15 000	0,045	0,036	0,50	945	2580	18x35,5	ECROJBK153M $\diamond\diamond\Delta\Delta$ 1835	
<b>10</b> <b>(13)</b> <b>1A</b>	22	11,5	2,5	0,19	3	92	5x11,5	ECR1ABK220M $\diamond\diamond\Delta\Delta$ 0511
	33	7,7	1,9	0,19	4	105	5x11,5	ECR1ABK330M $\diamond\diamond\Delta\Delta$ 0511
	47	5,4	1,5	0,19	5	120	5x11,5	ECR1ABK470M $\diamond\diamond\Delta\Delta$ 0511
	100	2,6	1,2	0,19	10	130	5x11,5	ECR1ABK101M $\diamond\diamond\Delta\Delta$ 0511
	220	1,2	0,58	0,19	22	220	6,3x11,5	ECR1ABK221M $\diamond\diamond\Delta\Delta$ 0611
		0,77	0,54	0,19	33	230	6,3x11,5	ECR1ABK331M $\diamond\diamond\Delta\Delta$ 0611
	330	0,77	0,47	0,19	33	265	8x11,5	ECR1ABK331M $\diamond\diamond\Delta\Delta$ 0811
		0,54	0,39	0,19	47	315	8x11,5	ECR1ABK471M $\diamond\diamond\Delta\Delta$ 0811
	470	0,25	0,25	0,19	100	500	10x12,5	ECR1ABK102M $\diamond\diamond\Delta\Delta$ 1012
		0,25	0,18	0,19	100	615	10x16	ECR1ABK102M $\diamond\diamond\Delta\Delta$ 1016
	1 000	0,13	0,17	0,21	220	761	10x20	ECR1ABK222M $\diamond\diamond\Delta\Delta$ 1020
		0,13	0,090	0,21	220	1050	12,5x20	ECR1ABK222M $\diamond\diamond\Delta\Delta$ 1220
	2 200	0,10	0,086	0,23	330	1010	12,5x20	ECR1ABK332M $\diamond\diamond\Delta\Delta$ 1220
		0,10	0,068	0,23	330	1300	12,5x25	ECR1ABK332M $\diamond\diamond\Delta\Delta$ 1225
	3 300	0,071	0,068	0,25	470	1250	12,5x25	ECR1ABK472M $\diamond\diamond\Delta\Delta$ 1225
0,071		0,056	0,25	470	1740	16x25	ECR1ABK472M $\diamond\diamond\Delta\Delta$ 1625	
6 800	0,057	0,056	0,29	680	1570	16x25	ECR1ABK682M $\diamond\diamond\Delta\Delta$ 1625	
	0,057	0,045	0,29	680	2110	16x31,5	ECR1ABK682M $\diamond\diamond\Delta\Delta$ 1631	
10 000	0,050	0,042	0,37	1000	1910	16x35,5	ECR1ABK103M $\diamond\diamond\Delta\Delta$ 1635	
	0,050	0,036	0,37	1000	2580	18x35,5	ECR1ABK103M $\diamond\diamond\Delta\Delta$ 1835	
<b>16</b> <b>(20)</b> <b>1C</b>	10	21,3	2,5	0,16	3	92	5x11,5	ECR1CBK100M $\diamond\diamond\Delta\Delta$ 0511
	22	9,7	1,9	0,16	4	105	5x11,5	ECR1CBK220M $\diamond\diamond\Delta\Delta$ 0511
	33	6,5	1,5	0,16	6	120	5x11,5	ECR1CBK330M $\diamond\diamond\Delta\Delta$ 0511
	47	4,6	1,2	0,16	8	130	5x11,5	ECR1CBK470M $\diamond\diamond\Delta\Delta$ 0511
	100	2,2	1,2	0,16	16	150	5x11,5	ECR1CBK101M $\diamond\diamond\Delta\Delta$ 0511
		2,2	0,58	0,16	16	220	6,3x11,5	ECR1CBK101M $\diamond\diamond\Delta\Delta$ 0611
	220	1,0	0,54	0,16	36	250	6,3x11,5	ECR1CBK221M $\diamond\diamond\Delta\Delta$ 0611
		1,0	0,47	0,16	36	290	8x11,5	ECR1CBK221M $\diamond\diamond\Delta\Delta$ 0811
	330	0,65	0,39	0,16	53	315	8x11,5	ECR1CBK331M $\diamond\diamond\Delta\Delta$ 0811
		0,46	0,66	0,16	76	350	8x11,5	ECR1CBK471M $\diamond\diamond\Delta\Delta$ 0811
	470	0,46	0,23	0,16	76	500	10x12,5	ECR1CBK471M $\diamond\diamond\Delta\Delta$ 1012
		0,22	0,21	0,16	160	610	10x16	ECR1CBK102M $\diamond\diamond\Delta\Delta$ 1016
	1 000	0,22	0,12	0,16	160	825	10x20	ECR1CBK102M $\diamond\diamond\Delta\Delta$ 1020
		0,11	0,095	0,18	352	961	12,5x20	ECR1CBK222M $\diamond\diamond\Delta\Delta$ 1220
	2 200	0,11	0,068	0,18	352	1300	12,5x25	ECR1CBK222M $\diamond\diamond\Delta\Delta$ 1225
0,081		0,068	0,20	528	1 200	12,5x25	ECR1CBK332M $\diamond\diamond\Delta\Delta$ 1225	
3 300	0,081	0,056	0,20	528	1740	16x25	ECR1CBK332M $\diamond\diamond\Delta\Delta$ 1625	
	0,063	0,052	0,22	752	1490	16x25	ECR1CBK472M $\diamond\diamond\Delta\Delta$ 1625	
4 700	0,063	0,045	0,22	752	2110	16x31,5	ECR1CBK472M $\diamond\diamond\Delta\Delta$ 1631	
	0,051	0,042	0,26	1088	1830	16x35,5	ECR1CBK682M $\diamond\diamond\Delta\Delta$ 1635	
6 800	0,051	0,036	0,26	1088	2580	18x35,5	ECR1CBK682M $\diamond\diamond\Delta\Delta$ 1835	

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance (µF)	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz (Ω)	Z <sub>max</sub> Max Impedance 20°C 100kHz (Ω)	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current (µA)	I <sub>RAC</sub> Rated Ripple Current 105°C 100kHz (mA rms)	Size øD x L (mm)	ORDER CODE
<b>25</b> <b>(32)</b> <b>1E</b>	4,7	39,6	3,0	0,14	3	85	5x11,5	ECR1EBK4R7M $\diamond\diamond\Delta\Delta$ 0511
	10	18,6	2,5	0,14	3	92	5x11,5	ECR1EBK100M $\diamond\diamond\Delta\Delta$ 0511
	22	8,5	1,9	0,14	6	105	5x11,5	ECR1EBK220M $\diamond\diamond\Delta\Delta$ 0511
	33	5,7	1,5	0,14	9	120	5x11,5	ECR1EBK330M $\diamond\diamond\Delta\Delta$ 0511
		4,7	4,0	1,2	0,14	12	130	5x11,5
	100	1,9	0,58	0,14	25	220	6,3x11,5	ECR1EBK101M $\diamond\diamond\Delta\Delta$ 0611
		0,85	0,39	0,14	55	315	8x11,5	ECR1EBK221M $\diamond\diamond\Delta\Delta$ 0811
	220	0,57	0,23	0,14	83	500	10x12,5	ECR1EBK331M $\diamond\diamond\Delta\Delta$ 1012
		0,40	0,21	0,14	118	429	10x12,5	ECR1EBK471M $\diamond\diamond\Delta\Delta$ 1012
	330	0,40	0,18	0,14	118	615	10x16	ECR1EBK471M $\diamond\diamond\Delta\Delta$ 1016
		0,19	0,12	0,14	250	705	10x20	ECR1EBK102M $\diamond\diamond\Delta\Delta$ 1020
	470	0,19	0,090	0,14	250	1050	12,5x20	ECR1EBK102M $\diamond\diamond\Delta\Delta$ 1220
		0,10	0,056	0,16	550	1740	16x25	ECR1EBK222M $\diamond\diamond\Delta\Delta$ 1625
	2 200	0,073	0,056	0,18	825	1440	16x25	ECR1EBK332M $\diamond\diamond\Delta\Delta$ 1625
		0,073	0,045	0,18	825	2110	16x31,5	ECR1EBK332M $\diamond\diamond\Delta\Delta$ 1631
3 300	0,057	0,050	0,20	1175	1880	16x35,5	ECR1EBK472M $\diamond\diamond\Delta\Delta$ 1631	
	0,057	0,036	0,20	1175	2580	18x35,5	ECR1EBK472M $\diamond\diamond\Delta\Delta$ 1835	
<b>35</b> <b>(44)</b> <b>1V</b>	4,7	33,9	2,5	0,12	3	92	5x11,5	ECR1VBK4R7M $\diamond\diamond\Delta\Delta$ 0511
	10	16,0	1,8	0,12	4	105	5x11,5	ECR1VBK100M $\diamond\diamond\Delta\Delta$ 0511
	22	7,3	1,5	0,12	8	120	5x11,5	ECR1VBK220M $\diamond\diamond\Delta\Delta$ 0511
	33	4,9	1,5	0,12	12	130	5x11,5	ECR1VBK330M $\diamond\diamond\Delta\Delta$ 0511
		3,4	1,7	0,12	17	90	5x11,5	ECR1VBK470M $\diamond\diamond\Delta\Delta$ 0511
	47	3,4	0,58	0,12	17	220	6,3x11,5	ECR1VBK470M $\diamond\diamond\Delta\Delta$ 0611
		1,6	0,80	0,12	35	151	6,3x11,5	ECR1VBK101M $\diamond\diamond\Delta\Delta$ 0611
	100	1,6	0,39	0,12	35	315	8x11,5	ECR1VBK101M $\diamond\diamond\Delta\Delta$ 0811
		0,73	0,23	0,12	77	500	10x12,5	ECR1VBK221M $\diamond\diamond\Delta\Delta$ 1012
	220	0,49	0,25	0,12	116	384	10x12,5	ECR1VBK331M $\diamond\diamond\Delta\Delta$ 1012
		0,49	0,18	0,12	116	615	10x16	ECR1VBK331M $\diamond\diamond\Delta\Delta$ 1016
	330	0,34	0,21	0,12	165	470	10x16	ECR1VBK471M $\diamond\diamond\Delta\Delta$ 1016
		0,34	0,12	0,12	165	825	10x20	ECR1VBK471M $\diamond\diamond\Delta\Delta$ 1020
	470	0,16	0,095	0,12	350	857	12,5x20	ECR1VBK102M $\diamond\diamond\Delta\Delta$ 1220
		0,16	0,068	0,12	350	1300	12,5x25	ECR1VBK102M $\diamond\diamond\Delta\Delta$ 1225
1 000	0,085	0,056	0,14	770	1380	16x25	ECR1VBK222M $\diamond\diamond\Delta\Delta$ 1625	
	0,085	0,045	0,14	770	2110	16x31,5	ECR1VBK222M $\diamond\diamond\Delta\Delta$ 1631	
2 200	0,065	0,042	0,16	1155	1780	16x35,5	ECR1VBK332M $\diamond\diamond\Delta\Delta$ 1635	
	0,065	0,036	0,16	1155	2580	18x35,5	ECR1VBK332M $\diamond\diamond\Delta\Delta$ 1835	
4 700	0,051	0,036	0,18	1645	2120	18x35,5	ECR1VBK472M $\diamond\diamond\Delta\Delta$ 1835	
<b>50</b> <b>(65)</b> <b>1H</b>	0,10	1.327	18,0	0,10	3	10	5x11,5	ECR1HBK0R1M $\diamond\diamond\Delta\Delta$ 0511
	0,22	603	13,0	0,10	3	15	5x11,5	ECR1HBK2R2M $\diamond\diamond\Delta\Delta$ 0511
	0,33	402	10,0	0,10	3	18	5x11,5	ECR1HBK3R3M $\diamond\diamond\Delta\Delta$ 0511
	0,47	283	7,0	0,10	3	23	5x11,5	ECR1HBK4R7M $\diamond\diamond\Delta\Delta$ 0511
		1,0	133	4,9	0,10	3	35	5x11,5
	2,2	60,3	4,2	0,10	3	53	5x11,5	ECR1HBK2R2M $\diamond\diamond\Delta\Delta$ 0511
		3,3	40,2	3,9	0,10	3	65	5x11,5
	4,7	28,3	3,6	0,10	3	82	5x11,5</	

RADIAL

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	Z <sub>max</sub> Max Impedance 20°C 100kHz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 105°C 100kHz	Size øD x L (mm)	ORDER CODE ◇◇ = pin style & length △△ = pitch code Details: Page 15
(V)	(µF)	(Ω)	(Ω)		(µA)	(mAmps)	(mm)	
63 (79) 1J	4,7	25,4	5,8	0,09	3	74	5x11,5	ECR1JBK4R7M◇◇△△0511
	10	12,0	3,6	0,09	7	95	5x11,5	ECR1JBK100M◇◇△△0511
	22	5,5	2,1	0,09	14	130	6,3x11,5	ECR1JBK220M◇◇△△0611
	33	3,7	1,7	0,09	21	160	6,3x11,5	ECR1JBK330M◇◇△△0611
	47	2,6	1,8	0,09	30	120	6,3x11,5	ECR1JBK470M◇◇△△0611
		2,6	1,2	0,09	30	305	8x11,5	ECR1JBK470M◇◇△△0811
	100	1,2	0,65	0,09	63	395	10x12,5	ECR1JBK101M◇◇△△1012
		0,55	0,48	0,09	139	335	10x16	ECR1JBK221M◇◇△△1016
	220	0,55	0,32	0,09	139	505	10x20	ECR1JBK221M◇◇△△1020
		0,37	0,32	0,09	208	510	10x20	ECR1JBK331M◇◇△△1020
	330	0,37	0,22	0,09	208	660	12,5x20	ECR1JBK331M◇◇△△1220
		0,26	0,16	0,09	297	640	12,5x20	ECR1JBK471M◇◇△△1220
470	0,26	0,16	0,09	297	850	12,5x25	ECR1JBK471M◇◇△△1225	
	0,12	0,13	0,09	630	930	16x25	ECR1JBK102M◇◇△△1625	
1 000	0,12	0,098	0,09	630	1430	16x31,5	ECR1JBK102M◇◇△△1631	

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	Z <sub>max</sub> Max Impedance 20°C 100kHz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 105°C 100kHz	Size øD x L (mm)	ORDER CODE ◇◇ = pin style & length △△ = pitch code Details: Page 15
(V)	(µF)	(Ω)	(Ω)		(µA)	(mAmps)	(mm)	
100 (125) 2A	0,47	226	13,0	0,08	3	30	5x11,5	ECR2ABKR47M◇◇△△0511
	1,0	107	11,0	0,08	3	45	5x11,5	ECR2ABK010M◇◇△△0511
		48,3	9,2	0,08	3	60	5x11,5	ECR2ABK2R2M◇◇△△0511
	3,3	32,2	7,2	0,08	4	67	5x11,5	ECR2ABK3R3M◇◇△△0511
	4,7	22,6	6,3	0,08	5	75	5x11,5	ECR2ABK4R7M◇◇△△0511
	10	10,7	3,3	0,08	10	110	6,3x11,5	ECR2ABK100M◇◇△△0611
	22	4,9	3,5	0,08	22	93	6,3x11,5	ECR2ABK220M◇◇△△0611
		4,9	1,4	0,08	22	165	8x11,5	ECR2ABK220M◇◇△△0811
	33	3,3	1,5	0,08	33	130	8x11,5	ECR2ABK330M◇◇△△0811
		3,3	0,94	0,08	33	305	10x12,5	ECR2ABK330M◇◇△△1012
	47	2,3	1,1	0,08	47	165	10x12,5	ECR2ABK470M◇◇△△1012
		2,3	0,68	0,08	47	320	10x16	ECR2ABK470M◇◇△△1016
100	1,1	0,50	0,08	100	265	10x20	ECR2ABK101M◇◇△△1020	
	1,1	0,28	0,08	100	585	12,5x20	ECR2ABK101M◇◇△△1220	
220	0,49	0,22	0,08	220	440	12,5x25	ECR2ABK221M◇◇△△1225	
	0,49	0,16	0,08	220	1120	16x25	ECR2ABK221M◇◇△△1625	
330	0,33	0,13	0,08	330	1290	16x25	ECR2ABK331M◇◇△△1625	
470	0,23	0,11	0,08	470	1350	16x31,5	ECR2ABK471M◇◇△△1631	

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	Z <sub>max</sub> Max Impedance 20°C 100kHz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 105°C 120Hz	Size øD x L (mm)	ORDER CODE ◇◇ = pin style & length △△ = pitch code Details: Page 15
(V)	(µF)	(Ω)	(Ω)		(µA)	(mAmps)	(mm)	
160 (200) 2C	0,47	424	-	0,15	48	12	6,3x11,5	ECR2CBKR47M◇◇△△0611
	1,0	199	-	0,15	56	18	6,3x11,5	ECR2CBK010M◇◇△△0611
	2,2	90,5	-	0,15	76	26	6,3x11,5	ECR2CBK2R2M◇◇△△0611
	3,3	60,3	-	0,15	93	28	6,3x11,5	ECR2CBK3R3M◇◇△△0611
		60,3	-	0,15	93	37	8x11,5	ECR2CBK3R3M◇◇△△0811
	4,7	42,4	-	0,15	116	34	6,3x11,5	ECR2CBK4R7M◇◇△△0611
		42,4	-	0,15	116	44	8x11,5	ECR2CBK4R7M◇◇△△0811
	10	19,9	-	0,15	164	58	8x11,5	ECR2CBK100M◇◇△△0811
		19,9	-	0,15	164	75	10x12,5	ECR2CBK100M◇◇△△1012
	22	9,1	-	0,15	241	135	10x16	ECR2CBK220M◇◇△△1016
	33	6,1	-	0,15	312	175	10x20	ECR2CBK330M◇◇△△1020
	47	4,3	-	0,15	401	230	12,5x20	ECR2CBK470M◇◇△△1220
100	2,0	-	0,15	740	299	12,5x25	ECR2CBK101M◇◇△△1225	
	2,0	-	0,15	740	330	16x25,5	ECR2CBK101M◇◇△△1625	
220	1,0	-	0,15	1508	500	16x35,5	ECR2CBK221M◇◇△△1635	
330	0,61	-	0,15	2212	764	18x36	ECR2CBK331M◇◇△△1836	

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	Z <sub>max</sub> Max Impedance 20°C 100kHz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 105°C 120Hz	Size øD x L (mm)	ORDER CODE ◇◇ = pin style & length △△ = pitch code Details: Page 15
(V)	(µF)	(Ω)	(Ω)		(µA)	(mAmps)	(mm)	
200 (250) 2D	0,47	424	-	0,15	50	12	6,3x11,5	ECR2DBKR47M◇◇△△0611
	1,0	199	-	0,15	60	18	6,3x11,5	ECR2DBK010M◇◇△△0611
	2,2	90,5	-	0,15	84	26	6,3x11,5	ECR2DBK2R2M◇◇△△0611
	3,3	60,3	-	0,15	106	28	6,3x11,5	ECR2DBK3R3M◇◇△△0611
		60,3	-	0,15	106	37	8x11,5	ECR2DBK3R3M◇◇△△0811
	4,7	42,4	-	0,15	134	40	8x11,5	ECR2DBK4R7M◇◇△△0811
		42,4	-	0,15	134	50	10x12,5	ECR2DBK4R7M◇◇△△1012
	10	19,9	-	0,15	180	66	10x12,5	ECR2DBK100M◇◇△△1012
		19,9	-	0,15	180	80	10x16	ECR2DBK100M◇◇△△1016
	22	9,1	-	0,15	276	135	10x20	ECR2DBK220M◇◇△△1020
	33	6,1	-	0,15	364	190	12,5x20	ECR2DBK330M◇◇△△1220
	47	4,3	-	0,15	476	230	12,5x25	ECR2DBK470M◇◇△△1225
100	2,0	-	0,15	900	360	16x25,5	ECR2DBK101M◇◇△△1625	
220	1,0	-	0,15	1860	525	18x31,5	ECR2DBK221M◇◇△△1831	

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	Z <sub>max</sub> Max Impedance 20°C 100kHz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 105°C 120Hz	Size øD x L (mm)	ORDER CODE ◇◇ = pin style & length △△ = pitch code Details: Page 15
(V)	(µF)	(Ω)	(Ω)		(µA)	(mAmps)	(mm)	
250 (300) 2E	0,47	424	-	0,15	52	12	6,3x11,5	ECR2EBKR47M◇◇△△0611
	1,0	199	-	0,15	65	18	6,3x11,5	ECR2EBK010M◇◇△△0611
	2,2	90,5	-	0,15	95	23	6,3x11,5	ECR2EBK2R2M◇◇△△0611
	3,3	60,3	-	0,15	123	43	8x11,5	ECR2EBK3R3M◇◇△△0811
		60,3	-	0,15	123	43	10x12,5	ECR2EBK3R3M◇◇△△1012
	4,7	42,4	-	0,15	147	40	8x11,5	ECR2EBK4R7M◇◇△△0811
		42,4	-	0,15	147	50	10x12,5	ECR2EBK4R7M◇◇△△1012
	10	19,9	-	0,15	200	90	10x16	ECR2EBK100M◇◇△△1016
		22	9,1	-	0,15	320	155	12,5x20
	33	6,1	-	0,15	430	190	12,5x25	ECR2EBK330M◇◇△△1225
	47	4,3	-	0,15	570	205	12,5x25	ECR2EBK470M◇◇△△1225
		4,3	-	0,15	570	225	16x25,5	ECR2EBK470M◇◇△△1625
100	2,0	-	0,15	1100	340	16x31,5	ECR2EBK101M◇◇△△1631	
150	1,3	-	0,15	1600	405	18x25,5	ECR2EBK151M◇◇△△1825	
220	0,90	-	0,15	2300	570	18x36	ECR2EBK221M◇◇△△1836	

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	Z <sub>max</sub> Max Impedance 20°C 100kHz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 105°C 120Hz	Size øD x L (mm)	ORDER CODE ◇◇ = pin style & length △△ = pitch code Details: Page 15
(V)	(µF)	(Ω)	(Ω)		(µA)	(mAmps)	(mm)	
350 (400) 2V	0,47	565	-	0,20	57	11	6,3x11,5	ECR2VBKR47M◇◇△△0611
	1,0	266	-	0,20	75	18	8x11,5	ECR2VBK010M◇◇△△0811
	2,2	121	-	0,20	117	30	8x11,5	ECR2VBK2R2M◇◇△△0811
	3,3	80,4	-	0,20	147	36	10x12,5	ECR2VBK3R3M◇◇△△1012
		56,5	-	0,20	166	45	10x12,5	ECR2VBK4R7M◇◇△△1012
	4,7	56,5	-	0,20	166	47	10x16	ECR2VBK4R7M◇◇△△1016
		26,6	-	0,20	240	95	10x20	ECR2VBK100M◇◇△△1020
	22	12,1	-	0,20	408	130	12,5x20	ECR2VBK220M◇◇△△1220
	33	8,0	-	0,20	562	180	12,5x25	ECR2VBK330M◇◇△△1225
		8,0	-	0,20	562	160	16x25,5	ECR2VBK330M◇◇△△1625
	47	5,7	-	0,20	758	330	16x25,5	ECR2VBK470M◇◇△△1625
	100	3,0	-	0,20	1500	620	18x31,5	ECR2VBK101M◇◇△△1831



U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	Z <sub>max</sub> Max Impedance 20°C 100kHz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 105°C 120Hz	Size øD x L	ORDER CODE ◇◇ = pin style & length △△ = pitch code Details: Page 15
(V)	(µF)	(Ω)	(Ω)		(µA)	(mA <sub>RMS</sub> )	(mm)	
<b>400</b> (450) 2G	1,0	266	-	0,20	80	16	6,3x11,5	ECR2GBK010M◇◇△△0611
		266	-	0,20	80	18	8x11,5	ECR2GBK010M◇◇△△0811
	2,2	121	-	0,20	128	25	8x11,5	ECR2GBK2R2M◇◇△△0811
		121	-	0,20	128	30	10x12,5	ECR2GBK2R2M◇◇△△1012
	3,3	80,4	-	0,20	153	35	10x12,5	ECR2GBK3R3M◇◇△△1012
		80,4	-	0,20	153	40	10x16	ECR2GBK3R3M◇◇△△1016
	4,7	56,5	-	0,20	176	47	10x12,5	ECR2GBK4R7M◇◇△△1012
		56,5	-	0,20	176	52	10x16	ECR2GBK4R7M◇◇△△1016
	10	26,6	-	0,20	260	80	10x16	ECR2GBK100M◇◇△△1016
		26,6	-	0,20	260	95	10x20	ECR2GBK100M◇◇△△1020
	22	26,6	-	0,20	260	120	12,5x20	ECR2GBK100M◇◇△△1220
		12,1	-	0,20	452	150	12,5x25,5	ECR2GBK220M◇◇△△1225
	33	12,1	-	0,20	452	150	16x25,5	ECR2GBK220M◇◇△△1625
		8,1	-	0,20	628	180	12,5x25	ECR2GBK330M◇◇△△1225
	47	8,1	-	0,20	628	180	16x20	ECR2GBK330M◇◇△△1620
		8,1	-	0,20	628	215	16x25,5	ECR2GBK330M◇◇△△1625
	68	5,7	-	0,20	852	360	16x25,5	ECR2GBK470M◇◇△△1625
		3,9	-	0,20	1188	470	18x25,5	ECR2GBK680M◇◇△△1825
	82	3,2	-	0,20	1412	575	18x31,5	ECR2GBK820M◇◇△△1831
		2,7	-	0,20	1700	675	18x36	ECR2GBK101M◇◇△△1836
100	2,2	-	0,20	2020	735	18x40	ECR2GBK121M◇◇△△1840	
	1,8	-	0,20	2500	825	20x41	ECR2GBK151M◇◇△△2041	

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	Z <sub>max</sub> Max Impedance 20°C 100kHz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 105°C 120Hz	Size øD x L	ORDER CODE ◇◇ = pin style & length △△ = pitch code Details: Page 15
(V)	(µF)	(Ω)	(Ω)		(µA)	(mA <sub>RMS</sub> )	(mm)	
<b>420</b> (470) 2X	1,0	266	-	0,20	82	16	8x11,5	ECR2XBK010M◇◇△△0811
		266	-	0,20	82	19	10x12,5	ECR2XBK010M◇◇△△1012
	2,2	121	-	0,20	133	24	8x11,5	ECR2XBK2R2M◇◇△△0811
		121	-	0,20	133	29	10x12,5	ECR2XBK2R2M◇◇△△1012
	3,3	80,4	-	0,20	156	34	10x12,5	ECR2XBK3R3M◇◇△△1012
		80,4	-	0,20	156	38	10x16	ECR2XBK3R3M◇◇△△1016
	4,7	56,5	-	0,20	179	46	10x16	ECR2XBK4R7M◇◇△△1016
		56,5	-	0,20	179	52	10x20	ECR2XBK4R7M◇◇△△1020
	10	26,5	-	0,20	268	100	10x20	ECR2XBK100M◇◇△△1020
		26,5	-	0,20	268	116	12,5x20	ECR2XBK100M◇◇△△1220
	22	12,1	-	0,20	470	162	12,5x25	ECR2XBK220M◇◇△△1225
		8,0	-	0,20	655	204	16x20	ECR2XBK330M◇◇△△1620
	33	8,0	-	0,20	655	228	16x25,5	ECR2XBK330M◇◇△△1625
		5,6	-	0,20	890	380	16x31,5	ECR2XBK470M◇◇△△1631
	47	4,7	-	0,20	1041	420	16x31,5	ECR2XBK560M◇◇△△1631
		4,7	-	0,20	1041	420	18x25,5	ECR2XBK560M◇◇△△1825
	68	3,9	-	0,20	1243	542	16x36	ECR2XBK680M◇◇△△1636
		3,9	-	0,20	1243	542	18x31,5	ECR2XBK680M◇◇△△1831
	82	3,2	-	0,20	1478	608	16x40	ECR2XBK820M◇◇△△1640
		3,2	-	0,20	1478	608	18x31,5	ECR2XBK820M◇◇△△1831
100	2,7	-	0,20	1780	713	16x45	ECR2XBK101M◇◇△△1645	
	2,7	-	0,20	1780	713	18x36	ECR2XBK101M◇◇△△1836	
120	2,2	-	0,20	2116	779	16x50	ECR2XBK121M◇◇△△1650	
	2,2	-	0,20	2116	779	18x40	ECR2XBK121M◇◇△△1840	
150	1,8	-	0,20	2620	874	16x60	ECR2XBK151M◇◇△△1660	
	1,8	-	0,20	2620	874	20x41	ECR2XBK151M◇◇△△2041	

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	Z <sub>max</sub> Max Impedance 20°C 100kHz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 105°C 120Hz	Size øD x L	ORDER CODE ◇◇ = pin style & length △△ = pitch code Details: Page 15
(V)	(µF)	(Ω)	(Ω)		(µA)	(mA <sub>RMS</sub> )	(mm)	
<b>450</b> (500) 2W	1,0	266	-	0,20	85	16	8x11,5	ECR2WBK010M◇◇△△0811
		266	-	0,20	85	19	10x12,5	ECR2WBK010M◇◇△△1012
	2,2	121	-	0,20	139	26	10x12,5	ECR2WBK2R2M◇◇△△1012
		121	-	0,20	139	29	10x16	ECR2WBK2R2M◇◇△△1016
	3,3	80,4	-	0,20	160	38	10x16	ECR2WBK3R3M◇◇△△1016
		80,4	-	0,20	160	42	10x20	ECR2WBK3R3M◇◇△△1020
	4,7	56,5	-	0,20	185	49	10x16	ECR2WBK4R7M◇◇△△1016
		56,5	-	0,20	185	54	10x20	ECR2WBK4R7M◇◇△△1020
	10	26,6	-	0,20	280	120	10x20	ECR2WBK100M◇◇△△1020
		12,1	-	0,20	496	170	12,5x25	ECR2WBK220M◇◇△△1225
	33	8,1	-	0,20	694	240	16x25,5	ECR2WBK330M◇◇△△1625
		5,6	-	0,20	946	400	16x31,5	ECR2WBK470M◇◇△△1631
	47	4,7	-	0,20	1108	440	16x31,5	ECR2WBK560M◇◇△△1631
		4,7	-	0,20	1108	440	18x25,5	ECR2WBK560M◇◇△△1825
	68	4,0	-	0,20	1324	490	16x36	ECR2WBK680M◇◇△△1636
		4,0	-	0,20	1324	570	18x31,5	ECR2WBK680M◇◇△△1831
	82	3,2	-	0,20	1576	640	16x40	ECR2WBK820M◇◇△△1640
		3,2	-	0,20	1576	640	18x31,5	ECR2WBK820M◇◇△△1831


U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	Z <sub>max</sub> Max Impedance 20°C 100kHz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 105°C 120Hz	Size øD x L	ORDER CODE ◇◇ = pin style & length △△ = pitch code Details: Page 15	
(V)	(µF)	(Ω)	(Ω)		(µA)	(mA <sub>RMS</sub> )	(mm)		
<b>450</b> (500) 2W	100	2,7	-	0,20	1900	750	16x45	ECR2WBK101M◇◇△△1645	
		2,7	-	0,20	1900	750	18x36	ECR2WBK101M◇◇△△1836	
	120	2,2	-	0,20	2260	820	16x50	ECR2WBK121M◇◇△△1650	
		2,2	-	0,20	2260	820	18x40	ECR2WBK121M◇◇△△1840	
	150	1,8	-	0,20	2800	920	16x60	ECR2WBK151M◇◇△△1660	
		1,8	-	0,20	2800	920	18x46	ECR2WBK151M◇◇△△1846	
	180	1,8	-	0,20	2800	920	20x41	ECR2WBK151M◇◇△△2041	
		1,5	-	0,20	3340	1100	22x41	ECR2WBK181M◇◇△△2241	
	<b>500</b> (550) 2H	1,0	266	-	0,20	90	21	10x12,5	ECR2HBK010M◇◇△△1012
			2,2	121	-	0,20	144	35	10x16
3,3		80,4	-	0,20	166	48	10x20	ECR2HBK3R3M◇◇△△1020	
		4,7	56,5	-	0,20	194	63	12,5x20	ECR2HBK4R7M◇◇△△1220
10		26,6	-	0,20	300	120	12,5x25	ECR2HBK100M◇◇△△1225	
		22	12,1	-	0,20	540	180	16x25,5	ECR2HBK220M◇◇△△1625
33		8,0	-	0,20	760	240	16x31,5	ECR2HBK330M◇◇△△1631	
		4,7	5,6	-	0,20	1040	405	18x31,5	ECR2HBK470M◇◇△△1831
56		4,7	-	0,20	1220	450	16x40	ECR2HBK560M◇◇△△1640	
		4,7	-	0,20	1220	450	18x31,5	ECR2HBK560M◇◇△△1831	
68		3,9	-	0,20	1460	560	16x45	ECR2HBK680M◇◇△△1645	
		3,9	-	0,20	1460	560	18x36	ECR2HBK680M◇◇△△1836	
82		3,2	-	0,20	1740	640	16x55	ECR2HBK820M◇◇△△1655	
		3,2	-	0,20	1740	640	18x40	ECR2HBK820M◇◇△△1840	
100		2,7	-	0,20	2100	800	16x60	ECR2HBK101M◇◇△△1660	
	2,7	-	0,20	2100	800	18x46	ECR2HBK101M◇◇△△1846		
120	2,2	-	0,20	2100	800	20x41	ECR2HBK101M◇◇△△2041		
	2,2	-	0,20	2500	840	22x45	ECR2HBK121M◇◇△△2245		
150	1,8	-	0,20	3100	890	22x45	ECR2HBK151M◇◇△△2245		

RADIAL



**4 000 at 125°C**

- High Reliability at High Temperature
- Automotive
- Professional Long-Life Applications

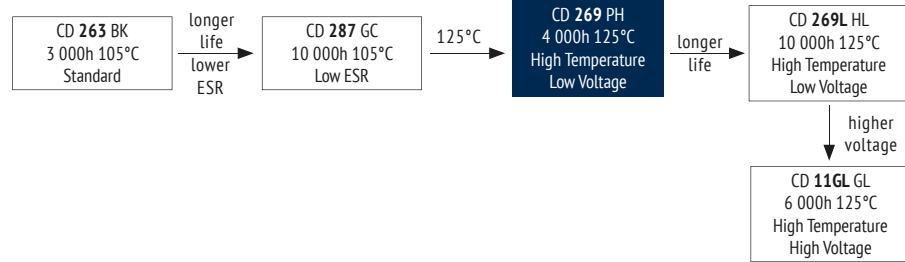

**ITEM CHARACTERISTICS**

Operating Temperature Range (°C)	-40 ~ +125
Voltage Range (V)	10 ~ 63
Capacitance Range (µF)	47 ~ 3 300
Capacitance Tolerance (20°C, 120Hz)	± 20%

**!** The usage at lower temperatures than indicated may be possible. Please contact the Jianghai Europe sales office for approval.

Leakage Current (µA) After 2 minutes at 20°C application of rated voltage, leakage current is not more than specified in table.


ITEM	USEFUL LIFE		LOAD LIFE	ENDURANCE TEST	SHELF LIFE	
Lifetime	4 000h	> 200 000h	2 000h	3 000h	1 000h	
Leakage Current	Not more than specified value		Not more than specified value	Not more than specified value	Not more than specified value	
Capacitance Change	Within ± 50% of initial value		Within ± 30% of initial value	Within ± 30% of initial value	Within ± 30% of initial value	
Dissipation Factor	Not more than 500% of specified value		Not more than 300% of specified value	Not more than 300% of specified value	Not more than 300% of specified value	
Condition:						
Applied Voltage	$U_R$	$U_R$	$U_R$	$U_R$	$U_R = 0$	After test: $U_R$ to be applied for 30 min > 24h before measurement
Applied Current	$I_R$	$1,4 \times I_R$	$I_R$	$I_R = 0$	$I_R = 0$	
Applied Temperature	125°C	50°C	125°C	125°C IEC 60384	125°C	

**MULTIPLIER FOR RIPPLE CURRENT (FREQUENCY COEFFICIENT)**

Capacitance (µF) \ Frequency	120Hz	1kHz	10kHz	100kHz
47 ~ 100	0,40	0,75	0,90	1,00
220 ~ 330	0,50	0,85	0,95	1,00
470 ~ 1 000	0,60	0,88	0,96	1,00
2 200 ~ 3 300	0,75	0,90	0,98	1,00

Multipliers for typical operating conditions.

**MULTIPLIER FOR LIFETIME (LIFETIME DIAGRAM)**

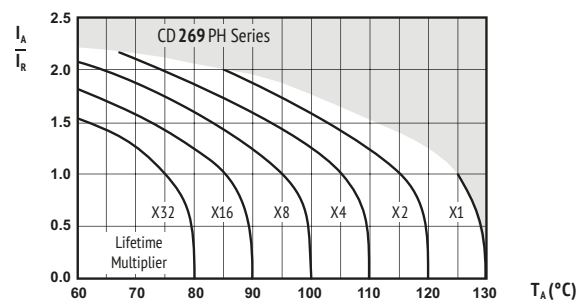

$I_A$  = actual ripple current at 100kHz,  
 $I_R$  = rated ripple current at 100kHz, 125°C  
 Multiplier of Useful Life as a function of ambient temperature & ripple current load

**ENVIRONMENTAL**

The products are RoHS, WEEE and REACH compliant. The detailed version please see separate "Environmental Certificates" document or [www.jianghai-europe.com](http://www.jianghai-europe.com)


**! SAFETY FACTOR**

This diagram includes a safety margin. In many cases the allowed current capability/lifetime may be increased. For details and approvals please contact the Jianghai Europe sales office.






$U_{RDC}$ (Surge Voltage) Code	$C_R$ Rated Capacitance	$ESR_{max}$ Equivalent Series Resistance	$Z_{max}$ Max Impedance	$Z_{max}$ Max Impedance	$\tan\delta$ Dissipation Factor	$I_{leak}$ Leakage Current	$I_{RAC}$ Rated Ripple Current	Size $\varnothing D \times L$	ORDER CODE
(V)	( $\mu F$ )	20°C 120Hz	20°C 100kHz	-10°C 100kHz	20°C 120Hz	( $\mu A$ )	125°C 100kHz	(mm)	◇◇ = pin style & length ◇◇ = pitch code Details: Page 15
<b>10</b> (13) 1A	330	0,80	0,33	0,66	0,20	132	340	8 x 11,5	ECR1APH331M◇◇◇◇0811
	470	0,57	0,24	0,48	0,20	188	500	10 x 12,5	ECR1APH471M◇◇◇◇1012
	1 000	0,27	0,12	0,24	0,20	400	770	10 x 20	ECR1APH102M◇◇◇◇1020
	2 200	0,14	0,061	0,13	0,22	880	1250	12,5 x 25	ECR1APH222M◇◇◇◇1225
	3 300	0,10	0,050	0,10	0,24	1320	1380	16 x 25	ECR1APH332M◇◇◇◇1625
<b>16</b> (20) 1C	220	0,97	0,33	0,66	0,16	141	340	8 x 11,5	ECR1CPH221M◇◇◇◇0811
	330	0,65	0,24	0,48	0,16	212	500	10 x 12,5	ECR1CPH331M◇◇◇◇1012
	470	0,46	0,20	0,40	0,16	301	630	10 x 16	ECR1CPH471M◇◇◇◇1016
	1 000	0,22	0,077	0,16	0,16	640	920	12,5 x 20	ECR1CPH102M◇◇◇◇1220
	2 200	0,11	0,050	0,10	0,18	1408	1380	16 x 25	ECR1CPH222M◇◇◇◇1625
<b>25</b> (32) 1E	220	0,85	0,23	0,46	0,14	220	480	8 x 16	ECR1EPH221M◇◇◇◇0816
	330	0,57	0,20	0,40	0,14	330	630	10 x 16	ECR1EPH331M◇◇◇◇1016
	470	0,40	0,12	0,24	0,14	470	770	10 x 20	ECR1EPH471M◇◇◇◇1020
	1 000	0,19	0,061	0,13	0,14	1000	1250	12,5 x 25	ECR1EPH102M◇◇◇◇1225
<b>35</b> (44) 1V	100	1,60	0,33	0,66	0,12	140	340	8 x 11,5	ECR1VPH101M◇◇◇◇0811
	220	0,73	0,20	0,40	0,12	308	630	10 x 16	ECR1VPH221M◇◇◇◇1016
	330	0,49	0,12	0,24	0,12	462	770	10 x 20	ECR1VPH331M◇◇◇◇1020
	470	0,34	0,077	0,16	0,12	658	920	12,5 x 20	ECR1VPH471M◇◇◇◇1220
	1 000	0,16	0,050	0,10	0,12	1400	1380	16 x 25	ECR1VPH102M◇◇◇◇1625
<b>50</b> (63) 1H	100	1,33	0,36	0,72	0,10	200	420	10 x 12,5	ECR1HPH101M◇◇◇◇1012
	220	0,61	0,20	0,40	0,10	440	655	10 x 20	ECR1HPH221M◇◇◇◇1020
	330	0,41	0,12	0,24	0,10	660	780	12,5 x 20	ECR1HPH331M◇◇◇◇1220
	470	0,29	0,10	0,20	0,10	940	1060	12,5 x 25	ECR1HPH471M◇◇◇◇1225
<b>63</b> (79) 1J	47	2,55	0,68	2,10	0,09	119	245	8 x 11,5	ECR1JPH470M◇◇◇◇0811
	100	1,20	0,38	1,20	0,09	252	425	10 x 16	ECR1JPH101M◇◇◇◇1016
	220	0,55	0,18	0,54	0,09	555	665	12,5 x 20	ECR1JPH221M◇◇◇◇1220
	330	0,37	0,14	0,42	0,09	832	900	12,5 x 25	ECR1JPH331M◇◇◇◇1225

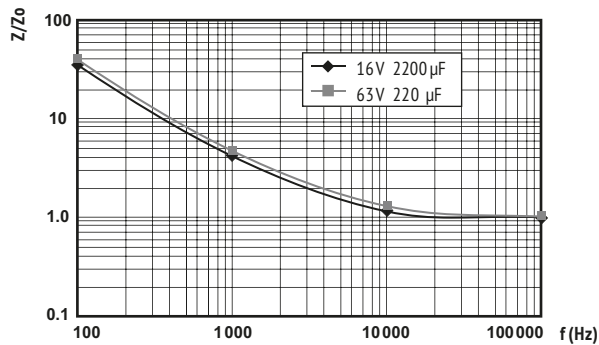**RADIAL**
**IMPEDANCE RATIO**


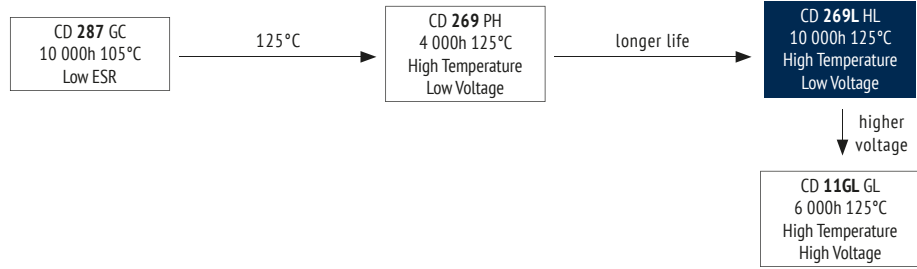
Z = actual impedance of each frequency at 20°C,  
 Z<sub>0</sub> = Impedance at 100kHz, 20°C  
 Impedance Ratio as a function of frequency

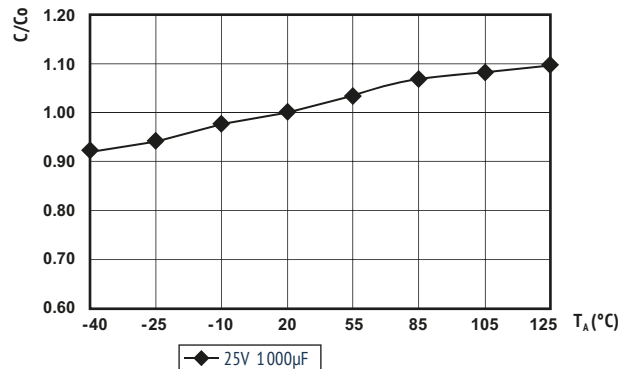**CAPACITANCE RATIO**


C = actual capacitance of each temperature at 100Hz,  
 C<sub>0</sub> = Capacitance at 20°C, 100Hz  
 Capacitance Ratio as a function of temperature (typical curve)

**4 000 - 10 000h at 125°C**

- High Reliability at High Temperature
- Automotive
- Professional Long-Life Applications



**ITEM CHARACTERISTICS**

Operating Temperature Range (°C)	-40 ~ +125
Voltage Range (V)	10 ~ 100
Capacitance Range (µF)	1 ~ 4 700
Capacitance Tolerance (20°C, 120Hz)	± 20%

**!** The usage at lower temperatures than indicated may be possible. Please contact the Jianghai Europe sales office for approval.

Leakage Current (µA) After 1 minute at 20°C application of rated voltage, leakage current is not more than specified in table.

Stability at Low Temperature (Impedance Ratio at 120Hz)	Rated Voltage (V)	10	16	25	35	50	53	100
	$Z_{-25°C} / Z_{+20°C}$		3				2	
$Z_{-40°C} / Z_{+20°C}$		6				4		


ITEM	USEFUL LIFE	LOAD LIFE	ENDURANCE TEST	SHELF LIFE	
Lifetime	Ø 8 : 4 000h Ø 10 : 6 000h Ø ≥ 12,5 : 10 000h	> 200 000h	Ø 8 : 2 000h Ø 10 : 3 000h Ø ≥ 12,5 : 5 000h	Ø 8 : 3 000h Ø 10 : 5 000h Ø ≥ 12,5 : 7 000h	1 000h
Leakage Current	Not more than specified value	Not more than specified value	Not more than specified value	Not more than specified value	
Capacitance Change	Within ± 50% of initial value	Within ± 30% of initial value	Within ± 30% of initial value	Within ± 30% of initial value	
Dissipation Factor	Not more than 500% of specified value	Not more than 300% of specified value	Not more than 300% of specified value	Not more than 300% of specified value	
Condition: Applied Voltage Applied Current Applied Temperature	$U_R$ $I_R$ 125°C	$U_R$ $1,4 \times I_R$ 50°C	$U_R$ $I_R$ 125°C	$U_R$ $I_R = 0$ 125°C IEC 60384	After test: $U_R$ to be applied for 30 min > 24h before measurement

**MULTIPLIER FOR RIPPLE CURRENT (FREQUENCY COEFFICIENT)**

Capacitance (µF) \ Frequency	50/60Hz	120Hz	1kHz	10kHz	100kHz
1 ~ 4,7	0,35	0,42	0,60	0,80	1,00
10 ~ 33	0,45	0,55	0,75	0,90	1,00
47 ~ 330	0,60	0,70	0,85	0,95	1,00
470 ~ 1 500	0,65	0,75	0,90	0,98	1,00
2 200 ~ 4 700	0,75	0,80	0,95	1,00	1,00

Multipliers for typical operating conditions.

**MULTIPLIER FOR LIFETIME (LIFETIME DIAGRAM)**

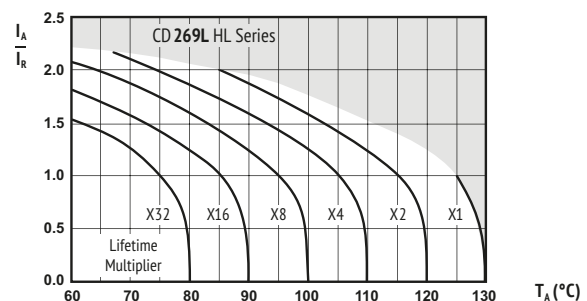

$I_A$  = actual ripple current at 100kHz,  
 $I_R$  = rated ripple current at 100kHz, 125°C  
 Multiplier of Useful Life as a function of ambient temperature & ripple current load

**ENVIRONMENTAL**

The products are RoHS, WEEE and REACH compliant. The detailed version please see separate "Environmental Certificates" document or [www.jianghai-europe.com](http://www.jianghai-europe.com)


**! SAFETY FACTOR**

This diagram includes a safety margin. In many cases the allowed current capability/lifetime may be increased. For details and approvals please contact the Jianghai Europe sales office.



U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance	Z <sub>max</sub> Max Impedance		tanδ Dissipation Factor	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current	Size øD x L	ORDER CODE
			20°C 120kHz	20°C 100kHz					
(V)	(µF)	(Ω)	(Ω)	(Ω)	20°C 120Hz	(µA)	(mArms)	(mm)	Details: Page 15
<b>10</b> (13) 1A	330	0,804	0,22	0,44	0,20	99	360	8 x 11,5	ECR1AHL331M◇◇△△0811
	470	0,565	0,15	0,30	0,20	141	620	10 x 12,5	ECR1AHL471M◇◇△△1012
	1 000	0,265	0,073	0,15	0,20	300	960	10 x 20	ECR1AHL102M◇◇△△1020
	2 200	0,133	0,040	0,080	0,22	660	1430	12,5 x 25	ECR1AHL222M◇◇△△1225
	3 300	0,097	0,038	0,076	0,24	990	1900	16 x 25	ECR1AHL332M◇◇△△1625
	4 700	0,073	0,034	0,068	0,26	1410	2300	16 x 31,5	ECR1AHL472M◇◇△△1631
<b>16</b> (20) 1C	330	0,643	0,22	0,44	0,16	158	360	8 x 11,5	ECR1CHL331M◇◇△△0811
	470	0,452	0,15	0,30	0,16	226	620	10 x 12,5	ECR1CHL471M◇◇△△1012
	1 000	0,212	0,073	0,15	0,16	480	960	10 x 20	ECR1CHL102M◇◇△△1020
	2 200	0,109	0,040	0,080	0,18	1056	1430	12,5 x 25	ECR1CHL222M◇◇△△1225
	3 300	0,080	0,034	0,068	0,20	1584	2300	16 x 31,5	ECR1CHL332M◇◇△△1631
	4 700	0,062	0,031	0,062	0,22	2256	2550	16 x 35,5	ECR1CHL472M◇◇△△1635
<b>25</b> (32) 1E	220	0,844	0,22	0,44	0,14	165	360	8 x 11,5	ECR1EHL221M◇◇△△0811
	330	0,563	0,15	0,30	0,14	248	620	10 x 12,5	ECR1EHL331M◇◇△△1012
	470	0,395	0,10	0,20	0,14	353	800	10 x 16	ECR1EHL471M◇◇△△1016
	1 000	0,186	0,055	0,11	0,14	750	1100	12,5 x 20	ECR1EHL102M◇◇△△1220
	2 200	0,097	0,034	0,068	0,16	1650	2300	16 x 31,5	ECR1EHL222M◇◇△△1631
	3 300	0,072	0,031	0,062	0,18	2475	2550	16 x 35,5	ECR1EHL332M◇◇△△1635
<b>35</b> (44) 1V	100	1,592	0,22	0,44	0,12	105	360	8 x 11,5	ECR1VHL101M◇◇△△0811
	220	0,724	0,15	0,30	0,12	231	620	10 x 12,5	ECR1VHL221M◇◇△△1012
	330	0,483	0,10	0,20	0,12	347	800	10 x 16	ECR1VHL331M◇◇△△1016
	470	0,339	0,073	0,15	0,12	494	960	10 x 20	ECR1VHL471M◇◇△△1020
	1 000	0,159	0,040	0,080	0,12	1050	1430	12,5 x 25	ECR1VHL102M◇◇△△1225
	2 200	0,084	0,031	0,062	0,14	2310	2550	16 x 35,5	ECR1VHL222M◇◇△△1635
	3 300	0,064	0,028	0,056	0,16	3465	2800	18 x 36	ECR1VHL332M◇◇△△1836
<b>50</b> (63) 1H	1,0	133	2,5	5,0	0,10	4	35	8 x 11,5	ECR1HHL010M◇◇△△0811
	2,2	61,0	1,8	3,6	0,10	4	50	8 x 11,5	ECR1HHL2R2M◇◇△△0811
	3,3	41,0	1,3	2,6	0,10	5	70	8 x 11,5	ECR1HHL3R3M◇◇△△0811
	4,7	28,3	0,85	1,7	0,10	7	100	8 x 11,5	ECR1HHL4R7M◇◇△△0811
	10	13,3	0,60	1,2	0,10	15	200	8 x 11,5	ECR1HHL100M◇◇△△0811
	22	6,10	0,35	0,70	0,10	33	260	8 x 11,5	ECR1HHL220M◇◇△△0811
	33	4,10	0,28	0,56	0,10	50	300	8 x 11,5	ECR1HHL330M◇◇△△0811
	47	2,90	0,28	0,56	0,10	71	300	8 x 11,5	ECR1HHL470M◇◇△△0811
	100	1,33	0,18	0,36	0,10	150	520	10 x 12,5	ECR1HHL101M◇◇△△1012
	220	0,603	0,082	0,17	0,10	330	890	10 x 20	ECR1HHL221M◇◇△△1020
	330	0,402	0,065	0,13	0,10	495	1000	12,5 x 20	ECR1HHL331M◇◇△△1220
	470	0,282	0,051	0,11	0,10	705	1200	12,5 x 25	ECR1HHL471M◇◇△△1225
	1 000	0,133	0,037	0,074	0,10	1500	2180	16 x 31,5	ECR1HHL102M◇◇△△1631
	2 200	0,072	0,029	0,058	0,12	3300	2800	18 x 40	ECR1HHL222M◇◇△△1840
<b>63</b> (79) 1J	33	3,62	0,40	1,2	0,09	62	250	8 x 11,5	ECR1JHL330M◇◇△△0811
	47	2,55	0,27	0,81	0,09	89	400	10 x 12,5	ECR1JHL470M◇◇△△1012
	100	1,20	0,20	0,60	0,09	189	450	10 x 16	ECR1JHL101M◇◇△△1016
	220	0,543	0,10	0,30	0,09	416	820	12,5 x 20	ECR1JHL221M◇◇△△1220
	330	0,362	0,072	0,22	0,09	624	1000	12,5 x 25	ECR1JHL331M◇◇△△1225
	470	0,254	0,069	0,21	0,09	888	1500	16 x 25	ECR1JHL471M◇◇△△1625
	1 000	0,119	0,056	0,17	0,09	1890	1850	16 x 31,5	ECR1JHL102M◇◇△△1631
	1 500	0,080	0,043	0,13	0,09	2835	2350	18 x 40	ECR1JHL152M◇◇△△1840
	<b>100</b> (125) 2A	4,7	22,6	1,3	5,2	0,08	14	100	8 x 11,5
10		10,7	1,0	4,0	0,08	30	200	8 x 11,5	ECR2AHL100M◇◇△△0811
22		4,90	0,67	2,7	0,08	66	220	8 x 11,5	ECR2AHL220M◇◇△△0811
33		3,30	0,45	1,8	0,08	99	260	10 x 12,5	ECR2AHL330M◇◇△△1012
47		2,30	0,33	1,33	0,08	141	330	10 x 16	ECR2AHL470M◇◇△△1016
100		1,07	0,17	0,68	0,08	300	670	12,5 x 20	ECR2AHL101M◇◇△△1220
220		0,483	0,13	0,52	0,08	660	1100	16 x 25	ECR2AHL221M◇◇△△1625
330		0,322	0,10	0,40	0,08	990	1300	16 x 31,5	ECR2AHL331M◇◇△△1631
470		0,226	0,092	0,37	0,08	1410	1600	18 x 31,5	ECR2AHL471M◇◇△△1831

**RADIAL**

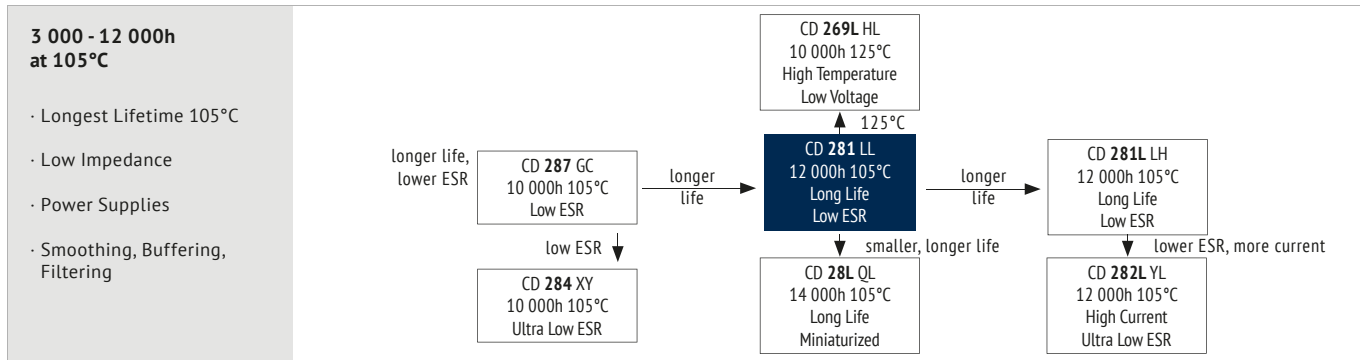

ITEM CHARACTERISTICS

Operating Temperature Range (°C)	-55 ~ +105
Voltage Range (V)	6,3 ~ 100
Capacitance Range (µF)	0,47 ~ 15 000
Capacitance Tolerance (20°C, 120Hz)	± 20%

**!** The usage at lower temperatures than indicated may be possible. Please contact the Jianghai Europe sales office for approval.

Leakage Current (µA) After 2 minutes at 20°C application of rated voltage, leakage current is not more than specified in table.

Stability at Low Temperature (Impedance Ratio at 120Hz)	Rated Voltage (V)	6,3 ~ 100
	Z <sub>-55°C</sub> / Z <sub>-20°C</sub>	3


ITEM	USEFUL LIFE	LOAD LIFE	ENDURANCE TEST	SHELF LIFE	
Lifetime	Ø 5 : 3 000h Ø 6,3-8 : 5 000h Ø 10 : 7 000h Ø 12,5 : 10 000h Ø ≥ 16 : 12 000h	Ø ≥ 6,3 : > 250 000h	Ø 5 : 2 000h Ø 6,3-8 : 3 000h Ø 10 : 5 000h Ø 12,5 : 7 000h Ø ≥ 16 : 8 000h	Ø 5 : 3 000h Ø 6,3-8 : 4 000h Ø 10 : 6 000h Ø 12,5 : 8 000h Ø ≥ 16 : 10 000h	1 000h
Leakage Current	Not more than specified value	Not more than specified value	Not more than specified value	Not more than specified value	
Capacitance Change	Within ± 30% of initial value	Within ± 20% of initial value	Within ± 20% of initial value	Within ± 20% of initial value	
Dissipation Factor	Not more than 300% of specified value	Not more than 200% of specified value	Not more than 200% of specified value	Not more than 200% of specified value	
Condition: Applied Voltage Applied Current Applied Temperature	$U_R$ $I_R$ 105°C	$U_R$ 1,4 x $I_R$ 40°C	$U_R$ $I_R$ 105°C	$U_R = 0$ $I_R = 0$ 105°C	After test: $U_R$ to be applied for 30 min > 24h before measurement

MULTIPLIER FOR RIPPLE CURRENT (FREQUENCY COEFFICIENT)

Capacitance (µF)	Frequency			
	120Hz	1kHz	10kHz	100kHz
0,47 ~ 4,7	0,40	0,68	0,83	1,00
5,6 ~ 47	0,50	0,76	0,87	1,00
56 ~ 270	0,70	0,85	0,93	1,00
330 ~ 1 000	0,80	0,93	0,98	1,00
1 200 ~ 15 000	0,90	0,95	1,00	1,00

Multipliers for typical operating conditions.

MULTIPLIER FOR LIFETIME (LIFETIME DIAGRAM)

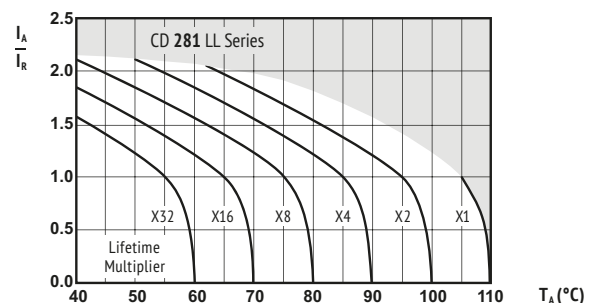

$I_A$  = actual ripple current at 100kHz,  
 $I_R$  = rated ripple current at 100kHz, 105°C  
 Multiplier of Useful Life as a function of ambient temperature & ripple current load

ENVIRONMENTAL

The products are RoHS, WEEE and REACH compliant. The detailed version please see separate "Environmental Certificates" document or [www.jianghai-europe.com](http://www.jianghai-europe.com)

**!** SAFETY FACTOR

This diagram includes a safety margin. In many cases the allowed current capability/lifetime may be increased. For details and approvals please contact the Jianghai Europe sales office.





U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance	Z <sub>max</sub> Max Impedance		tanδ Dissipation Factor	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current	Size øD x L	ORDER CODE
			20°C 120kHz	20°C 100kHz					
(V)	(µF)	(Ω)	(Ω)	(Ω)		(µA)	(mArms)	(mm)	Details: Page 15
<b>6,3</b> <b>(7,2)</b> <b>0J</b>	100	2,92	0,650	1,30	0,22	13	175	5 x 11,5	ECROJLL101M◊◊◊◊0511
	150	1,95	0,460	0,920	0,22	19	235	5 x 15	ECROJLL151M◊◊◊◊0515
	220	1,33	0,300	0,600	0,22	28	290	6,3 x 11,5	ECROJLL221M◊◊◊◊0611
	330	0,885	0,200	0,400	0,22	42	400	6,3 x 15	ECROJLL331M◊◊◊◊0615
	470	0,621	0,170	0,340	0,22	60	488	8 x 11,5	ECROJLL471M◊◊◊◊0811
	680	0,429	0,130	0,260	0,22	86	617	8 x 16	ECROJLL681M◊◊◊◊0816
		0,429	0,120	0,240	0,22	86	613	10 x 12,5	ECROJLL681M◊◊◊◊1012
	820	0,356	0,095	0,190	0,22	104	734	10 x 16	ECROJLL821M◊◊◊◊1016
	1 000	0,292	0,095	0,190	0,22	126	800	8 x 20	ECROJLL102M◊◊◊◊0820
	1 200	0,243	0,065	0,130	0,22	152	1010	10 x 20	ECROJLL122M◊◊◊◊1020
		0,243	0,065	0,130	0,22	152	1010	12,5 x 15	ECROJLL122M◊◊◊◊1215
	1 500	0,195	0,055	0,110	0,22	189	1190	10 x 25	ECROJLL152M◊◊◊◊1025
	2 200	0,145	0,045	0,090	0,24	278	1440	10 x 30	ECROJLL222M◊◊◊◊1030
		0,145	0,042	0,084	0,24	278	1400	12,5 x 20	ECROJLL222M◊◊◊◊1220
	2 700	0,118	0,038	0,076	0,24	341	1690	12,5 x 25	ECROJLL272M◊◊◊◊1225
		0,118	0,046	0,092	0,24	341	1310	16 x 15	ECROJLL272M◊◊◊◊1615
	3 300	0,105	0,043	0,086	0,26	416	1460	18 x 15	ECROJLL332M◊◊◊◊1815
	3 900	0,088	0,032	0,064	0,26	492	1950	12,5 x 30	ECROJLL392M◊◊◊◊1230
	4 700	0,079	0,028	0,056	0,28	593	2220	12,5 x 35	ECROJLL472M◊◊◊◊1235
		0,079	0,034	0,068	0,28	593	1660	16 x 20	ECROJLL472M◊◊◊◊1620
	5 600	0,071	0,026	0,052	0,30	706	2390	12,5 x 40	ECROJLL562M◊◊◊◊1240
		0,071	0,028	0,056	0,30	706	2070	16 x 25	ECROJLL562M◊◊◊◊1625
		0,071	0,030	0,060	0,30	706	1850	18 x 20	ECROJLL562M◊◊◊◊1820
	6 800	0,062	0,025	0,050	0,32	857	2350	16 x 31,5	ECROJLL682M◊◊◊◊1631
		0,062	0,027	0,054	0,32	857	2120	18 x 25	ECROJLL682M◊◊◊◊1825
	8 200	0,058	0,022	0,044	0,36	1034	2550	16 x 35,5	ECROJLL822M◊◊◊◊1635
	10 000	0,053	0,023	0,046	0,40	1260	2410	18 x 31,5	ECROJLL103M◊◊◊◊1831
	12 000	0,049	0,020	0,040	0,44	1512	2970	16 x 40	ECROJLL123M◊◊◊◊1640
0,049		0,020	0,040	0,44	1512	2680	18 x 35,5	ECROJLL123M◊◊◊◊1835	
15 000	0,044	0,019	0,038	0,50	1890	3010	18 x 40	ECROJLL153M◊◊◊◊1840	
<b>10</b> <b>(13)</b> <b>1A</b>	82	3,08	0,650	1,30	0,19	17	175	5 x 11,5	ECRIALL820M◊◊◊◊0511
	100	2,53	0,460	0,920	0,19	20	235	5 x 15	ECRIALL101M◊◊◊◊0515
	180	1,40	0,300	0,600	0,19	36	290	6,3 x 11,5	ECRIALL181M◊◊◊◊0611
	220	1,15	0,200	0,400	0,19	44	400	6,3 x 15	ECRIALL221M◊◊◊◊0615
	330	0,764	0,170	0,340	0,19	66	488	8 x 11,5	ECRIALL331M◊◊◊◊0811
	470	0,536	0,130	0,260	0,19	94	617	8 x 16	ECRIALL471M◊◊◊◊0816
		0,536	0,120	0,240	0,19	94	613	10 x 12,5	ECRIALL471M◊◊◊◊1012
	560	0,450	0,095	0,190	0,19	112	734	10 x 16	ECRIALL561M◊◊◊◊1016
	680	0,371	0,095	0,190	0,19	136	800	8 x 20	ECRIALL681M◊◊◊◊0820
	1 000	0,252	0,065	0,130	0,19	200	1010	10 x 20	ECRIALL102M◊◊◊◊1020
		0,252	0,065	0,130	0,19	200	1010	12,5 x 15	ECRIALL102M◊◊◊◊1215
	1 200	0,210	0,055	0,110	0,19	240	1190	10 x 25	ECRIALL122M◊◊◊◊1025
	1 500	0,168	0,045	0,090	0,19	300	1440	10 x 30	ECRIALL152M◊◊◊◊1030
	1 800	0,140	0,042	0,084	0,19	360	1400	12,5 x 20	ECRIALL182M◊◊◊◊1220
		0,140	0,046	0,092	0,19	360	1310	16 x 15	ECRIALL182M◊◊◊◊1615
	2 200	0,127	0,038	0,076	0,21	440	1690	12,5 x 25	ECRIALL222M◊◊◊◊1225
		0,127	0,043	0,086	0,21	440	1460	18 x 15	ECRIALL222M◊◊◊◊1815
	2 700	0,103	0,032	0,064	0,21	540	1950	12,5 x 30	ECRIALL272M◊◊◊◊1230
	3 300	0,092	0,028	0,056	0,23	660	2220	12,5 x 35	ECRIALL332M◊◊◊◊1235
		0,092	0,034	0,068	0,23	660	1660	16 x 20	ECRIALL332M◊◊◊◊1620
	3 900	0,078	0,026	0,052	0,23	780	2390	12,5 x 40	ECRIALL392M◊◊◊◊1240
		0,078	0,028	0,056	0,23	780	2070	16 x 25	ECRIALL392M◊◊◊◊1625
		0,078	0,030	0,060	0,23	780	1850	18 x 20	ECRIALL392M◊◊◊◊1820
	4 700	0,071	0,027	0,054	0,25	940	2120	18 x 25	ECRIALL472M◊◊◊◊1825
	5 600	0,064	0,025	0,050	0,27	1120	2350	16 x 31,5	ECRIALL562M◊◊◊◊1631
	6 800	0,057	0,022	0,044	0,29	1360	2550	16 x 35,5	ECRIALL682M◊◊◊◊1635
		0,057	0,023	0,046	0,29	1360	2410	18 x 31,5	ECRIALL682M◊◊◊◊1831
	8 200	0,053	0,020	0,040	0,33	1640	2970	16 x 40	ECRIALL822M◊◊◊◊1640
0,053		0,020	0,040	0,33	1640	2680	18 x 35,5	ECRIALL822M◊◊◊◊1835	
10 000	0,049	0,019	0,038	0,37	2000	3010	18 x 40	ECRIALL103M◊◊◊◊1840	
<b>16</b> <b>(20)</b> <b>1C</b>	56	3,80	0,650	1,30	0,16	18	175	5 x 11,5	ECRIALL560M◊◊◊◊0511
	82	2,59	0,460	0,920	0,16	27	235	5 x 15	ECRIALL820M◊◊◊◊0515
	120	1,77	0,300	0,600	0,16	39	290	6,3 x 11,5	ECRIALL121M◊◊◊◊0611
	180	1,18	0,200	0,400	0,16	58	400	6,3 x 15	ECRIALL181M◊◊◊◊0615
	270	0,786	0,170	0,340	0,16	87	501	8 x 11,5	ECRIALL271M◊◊◊◊0811
	330	0,643	0,130	0,260	0,16	106	575	8 x 16	ECRIALL331M◊◊◊◊0816

**RADIAL**

&gt;&gt;



RADIAL

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance	Z <sub>max</sub> Max Impedance		tanδ Dissipation Factor	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current	Size øD x L	ORDER CODE	
			20°C 120kHz	20°C 100kHz						-10°C 100kHz
(V)	(µF)	(Ω)	(Ω)	(Ω)		(µA)	(mA <sub>rms</sub> )	(mm)	Details: Page 15	
16 (20) 1C	330	0,643	0,120	0,240	0,16	106	625	10 x 12,5	ECR1CLL331M $\diamond\diamond\Delta$ 1012	
	390	0,544	0,095	0,190	0,16	125	795	10 x 16	ECR1CLL391M $\diamond\diamond\Delta$ 1016	
	470	0,452	0,095	0,190	0,16	151	760	8 x 20	ECR1CLL471M $\diamond\diamond\Delta$ 0820	
	680		0,312	0,065	0,130	0,16	218	1010	10 x 20	ECR1CLL681M $\diamond\diamond\Delta$ 1020
			0,312	0,065	0,130	0,16	218	1010	12,5 x 15	ECR1CLL681M $\diamond\diamond\Delta$ 1215
	820	0,259	0,055	0,110	0,16	263	1190	10 x 25	ECR1CLL821M $\diamond\diamond\Delta$ 1025	
	1 200		0,177	0,045	0,090	0,16	384	1430	10 x 30	ECR1CLL122M $\diamond\diamond\Delta$ 1030
			0,177	0,042	0,084	0,16	384	1400	12,5 x 20	ECR1CLL122M $\diamond\diamond\Delta$ 1220
	1 500		0,142	0,038	0,076	0,16	480	1690	12,5 x 25	ECR1CLL152M $\diamond\diamond\Delta$ 1225
			0,142	0,046	0,092	0,16	480	1340	16 x 15	ECR1CLL152M $\diamond\diamond\Delta$ 1615
			0,142	0,043	0,086	0,16	480	1490	18 x 15	ECR1CLL152M $\diamond\diamond\Delta$ 1815
	2 200		0,109	0,032	0,064	0,18	704	1950	12,5 x 30	ECR1CLL222M $\diamond\diamond\Delta$ 1230
			0,109	0,034	0,068	0,18	704	1730	16 x 20	ECR1CLL222M $\diamond\diamond\Delta$ 1620
	2 700		0,088	0,028	0,056	0,18	864	2 200	12,5 x 35	ECR1CLL272M $\diamond\diamond\Delta$ 1235
			0,088	0,028	0,056	0,18	864	2070	16 x 25	ECR1CLL272M $\diamond\diamond\Delta$ 1625
			0,088	0,030	0,060	0,18	864	1870	18 x 20	ECR1CLL272M $\diamond\diamond\Delta$ 1820
	3 300	0,080	0,026	0,052	0,20	1056	2390	12,5 x 40	ECR1CLL332M $\diamond\diamond\Delta$ 1240	
	3 900		0,068	0,025	0,050	0,20	1248	2350	16 x 31,5	ECR1CLL392M $\diamond\diamond\Delta$ 1631
			0,068	0,027	0,054	0,20	1248	2160	18 x 25	ECR1CLL392M $\diamond\diamond\Delta$ 1825
	4 700		0,062	0,022	0,044	0,22	1504	2550	16 x 35,5	ECR1CLL472M $\diamond\diamond\Delta$ 1635
		0,062	0,023	0,046	0,22	1504	2450	18 x 31,5	ECR1CLL472M $\diamond\diamond\Delta$ 1831	
5 600	0,057	0,020	0,040	0,24	1792	2 900	16 x 40	ECR1CLL562M $\diamond\diamond\Delta$ 1640		
6 800	0,051	0,020	0,040	0,26	2176	2730	18 x 35,5	ECR1CLL682M $\diamond\diamond\Delta$ 1835		
8 200	0,049	0,019	0,038	0,30	2624	3060	18 x 40	ECR1CLL822M $\diamond\diamond\Delta$ 1840		

25 (32) 1E	39	4,77	0,650	1,30	0,14	20	175	5 x 11,5	ECR1ELL390M $\diamond\diamond\Delta$ 0511	
	56	3,32	0,460	0,920	0,14	28	235	5 x 15	ECR1ELL560M $\diamond\diamond\Delta$ 0515	
	82	2,27	0,300	0,600	0,14	41	290	6,3 x 11,5	ECR1ELL820M $\diamond\diamond\Delta$ 0611	
	120	1,55	0,200	0,400	0,14	60	400	6,3 x 15	ECR1ELL121M $\diamond\diamond\Delta$ 0615	
	180		1,04	0,170	0,340	0,14	90	503	8 x 11,5	ECR1ELL181M $\diamond\diamond\Delta$ 0811
			0,844	0,130	0,260	0,14	110	575	8 x 16	ECR1ELL221M $\diamond\diamond\Delta$ 0816
	220		0,844	0,120	0,240	0,14	110	629	10 x 12,5	ECR1ELL221M $\diamond\diamond\Delta$ 1012
			0,688	0,095	0,190	0,14	135	795	10 x 16	ECR1ELL271M $\diamond\diamond\Delta$ 1016
	330	0,563	0,095	0,190	0,14	165	751	8 x 20	ECR1ELL331M $\diamond\diamond\Delta$ 0820	
	470		0,395	0,065	0,130	0,14	235	1010	10 x 20	ECR1ELL471M $\diamond\diamond\Delta$ 1020
			0,395	0,065	0,130	0,14	235	1010	12,5 x 15	ECR1ELL471M $\diamond\diamond\Delta$ 1215
	560		0,332	0,055	0,110	0,14	280	1190	10 x 25	ECR1ELL561M $\diamond\diamond\Delta$ 1025
			0,227	0,045	0,090	0,14	410	1440	10 x 30	ECR1ELL821M $\diamond\diamond\Delta$ 1030
	820		0,227	0,042	0,084	0,14	410	1400	12,5 x 20	ECR1ELL821M $\diamond\diamond\Delta$ 1220
			0,227	0,046	0,092	0,14	410	1360	16 x 15	ECR1ELL821M $\diamond\diamond\Delta$ 1615
	1 000	0,186	0,038	0,076	0,14	500	1690	12,5 x 25	ECR1ELL102M $\diamond\diamond\Delta$ 1225	
	1 200	0,155	0,043	0,086	0,14	600	1500	18 x 15	ECR1ELL122M $\diamond\diamond\Delta$ 1815	
	1 500		0,124	0,032	0,064	0,14	750	1950	12,5 x 30	ECR1ELL152M $\diamond\diamond\Delta$ 1230
			0,124	0,034	0,068	0,14	750	1730	16 x 20	ECR1ELL152M $\diamond\diamond\Delta$ 1620
	1 800		0,103	0,028	0,056	0,14	900	2 200	12,5 x 35	ECR1ELL182M $\diamond\diamond\Delta$ 1235
		0,103	0,028	0,056	0,14	900	2070	16 x 25	ECR1ELL182M $\diamond\diamond\Delta$ 1625	
		0,103	0,030	0,060	0,14	900	1890	18 x 20	ECR1ELL182M $\diamond\diamond\Delta$ 1820	
2 200	0,097	0,026	0,052	0,16	1100	2390	12,5 x 40	ECR1ELL222M $\diamond\diamond\Delta$ 1240		
2 700		0,079	0,025	0,050	0,16	1350	2350	16 x 31,5	ECR1ELL272M $\diamond\diamond\Delta$ 1631	
		0,079	0,027	0,054	0,16	1350	2180	18 x 25	ECR1ELL272M $\diamond\diamond\Delta$ 1825	
3 300		0,072	0,022	0,044	0,18	1650	2550	16 x 35,5	ECR1ELL332M $\diamond\diamond\Delta$ 1635	
		0,072	0,023	0,046	0,18	1650	2470	18 x 31,5	ECR1ELL332M $\diamond\diamond\Delta$ 1831	
3 900		0,061	0,020	0,040	0,18	1950	2 900	16 x 40	ECR1ELL392M $\diamond\diamond\Delta$ 1640	
		0,061	0,020	0,040	0,18	1950	2740	18 x 35,5	ECR1ELL392M $\diamond\diamond\Delta$ 1835	
4 700	0,056	0,019	0,038	0,20	2350	3070	18 x 40	ECR1ELL472M $\diamond\diamond\Delta$ 1840		

35 (44) 1V	27	5,90	0,650	1,30	0,12	19	175	5 x 11,5	ECR1VLL270M $\diamond\diamond\Delta$ 0511	
	39	4,09	0,460	0,920	0,12	28	235	5 x 15	ECR1VLL390M $\diamond\diamond\Delta$ 0515	
	56	2,85	0,300	0,600	0,12	40	290	6,3 x 11,5	ECR1VLL560M $\diamond\diamond\Delta$ 0611	
	82	1,95	0,200	0,400	0,12	58	400	6,3 x 15	ECR1VLL820M $\diamond\diamond\Delta$ 0615	
	120	1,33	0,170	0,340	0,12	84	501	8 x 11,5	ECR1VLL121M $\diamond\diamond\Delta$ 0811	
	150		1,07	0,120	0,240	0,12	105	625	10 x 12,5	ECR1VLL151M $\diamond\diamond\Delta$ 1012
			0,885	0,130	0,260	0,12	126	575	8 x 16	ECR1VLL181M $\diamond\diamond\Delta$ 0816
	180		0,885	0,095	0,190	0,12	126	795	10 x 16	ECR1VLL181M $\diamond\diamond\Delta$ 1016
			0,724	0,095	0,190	0,12	154	760	8 x 20	ECR1VLL221M $\diamond\diamond\Delta$ 0820
	330		0,483	0,065	0,130	0,12	231	1010	10 x 20	ECR1VLL331M $\diamond\diamond\Delta$ 1020
			0,483	0,065	0,130	0,12	231	1010	12,5 x 15	ECR1VLL331M $\diamond\diamond\Delta$ 1215
	390	0,408	0,055	0,110	0,12	273	1190	10 x 25	ECR1VLL391M $\diamond\diamond\Delta$ 1025	





U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub>	Z <sub>max</sub>	Z <sub>max</sub>	tanδ	I <sub>leak</sub>	I <sub>RAC</sub>	Size	ORDER CODE	
		Equivalent Series Resistance	Max Impedance	Max Impedance						Dissipation Factor
(V)	(µF)	20°C 120Hz	20°C 100kHz	-10°C 100kHz	20°C 120Hz	(µA)	Rated Ripple Current	øD x L		
		(Ω)	(Ω)	(Ω)			(mA <sub>rms</sub> )	(mm)	Details: Page 15	
<b>35</b> (44) 1V	560	0,284	0,045	0,090	0,12	392	1450	10 x 30	ECR1VLL561M◇◇◇1030	
		0,284	0,042	0,084	0,12	392	1400	12,5 x 20	ECR1VLL561M◇◇◇1220	
		0,284	0,046	0,092	0,12	392	1360	16 x 15	ECR1VLL561M◇◇◇1615	
	680	0,234	0,038	0,076	0,12	476	1690	12,5 x 25	ECR1VLL681M◇◇◇1225	
		0,234	0,043	0,086	0,12	476	1520	18 x 15	ECR1VLL681M◇◇◇1815	
	1 000	0,159	0,032	0,064	0,12	700	1950	12,5 x 30	ECR1VLL102M◇◇◇1230	
		0,159	0,034	0,068	0,12	700	1730	16 x 20	ECR1VLL102M◇◇◇1620	
	1 200	0,133	0,028	0,056	0,12	840	2 200	12,5 x 35	ECR1VLL122M◇◇◇1235	
		0,133	0,028	0,056	0,12	840	2070	16 x 25	ECR1VLL122M◇◇◇1625	
	1 500	0,133	0,030	0,060	0,12	840	1 900	18 x 20	ECR1VLL122M◇◇◇1820	
		0,106	0,026	0,052	0,12	1050	2390	12,5 x 40	ECR1VLL152M◇◇◇1240	
	1 800	0,088	0,025	0,050	0,12	1260	2350	16 x 31,5	ECR1VLL182M◇◇◇1631	
		0,088	0,027	0,054	0,12	1260	2 200	18 x 25	ECR1VLL182M◇◇◇1825	
	2 200	0,084	0,022	0,044	0,14	1540	2550	16 x 35,5	ECR1VLL222M◇◇◇1635	
		0,084	0,023	0,046	0,14	1540	2490	18 x 31,5	ECR1VLL222M◇◇◇1831	
	2 700	0,069	0,020	0,040	0,14	1890	2 900	16 x 40	ECR1VLL272M◇◇◇1640	
		0,069	0,020	0,040	0,14	1890	2770	18 x 35,5	ECR1VLL272M◇◇◇1835	
	3 300	0,064	0,019	0,038	0,16	2310	3110	18 x 40	ECR1VLL332M◇◇◇1840	
	<b>50</b> (63) 1H	0,47	283	3,90	7,80	0,10	3	22	5 x 11,5	ECR1HLLR47M◇◇◇0511
		1,0	133	3,50	7,00	0,10	3	36	5 x 11,5	ECR1HLL010M◇◇◇0511
2,2		60,4	3,00	6,00	0,10	3	54	5 x 11,5	ECR1HLL2R2M◇◇◇0511	
3,3		40,2	2,60	5,20	0,10	4	63	5 x 11,5	ECR1HLL3R3M◇◇◇0511	
4,7		28,3	2,20	4,40	0,10	5	75	5 x 11,5	ECR1HLL4R7M◇◇◇0511	
10		13,3	1,40	2,80	0,10	10	110	5 x 11,5	ECR1HLL100M◇◇◇0511	
18		7,38	0,950	1,90	0,10	18	120	5 x 11,5	ECR1HLL180M◇◇◇0511	
27		4,92	0,550	1,10	0,10	27	135	5 x 15	ECR1HLL270M◇◇◇0515	
39		3,41	0,360	0,720	0,10	39	148	6,3 x 11,5	ECR1HLL390M◇◇◇0611	
56		2,37	0,280	0,560	0,10	56	153	6,3 x 15	ECR1HLL560M◇◇◇0615	
68		1,96	0,200	0,400	0,10	68	360	8 x 11,5	ECR1HLL680M◇◇◇0811	
		1,62	0,180	0,360	0,10	82	460	8 x 16	ECR1HLL820M◇◇◇0816	
82		1,62	0,180	0,360	0,10	82	443	10 x 12,5	ECR1HLL820M◇◇◇1012	
		1,33	0,150	0,300	0,10	100	553	10 x 16	ECR1HLL101Q◇◇◇1016	
100		1,33	0,150	0,300	0,10	100	553	10 x 16	ECR1HLL101M◇◇◇1016	
		1,11	0,130	0,260	0,10	120	670	8 x 20	ECR1HLL121M◇◇◇0820	
180		0,737	0,095	0,190	0,10	180	676	10 x 20	ECR1HLL181M◇◇◇1020	
		0,737	0,105	0,210	0,10	180	745	12,5 x 15	ECR1HLL181M◇◇◇1215	
220		0,603	0,080	0,160	0,10	220	876	10 x 25	ECR1HLL221M◇◇◇1025	
		0,402	0,065	0,130	0,10	330	1010	10 x 30	ECR1HLL331M◇◇◇1030	
330		0,402	0,070	0,140	0,10	330	979	12,5 x 20	ECR1HLL331M◇◇◇1220	
		0,402	0,075	0,150	0,10	330	982	16 x 15	ECR1HLL331M◇◇◇1615	
470		0,282	0,054	0,108	0,10	470	1180	12,5 x 25	ECR1HLL471M◇◇◇1225	
		0,282	0,058	0,116	0,10	470	1180	18 x 15	ECR1HLL471M◇◇◇1815	
560		0,237	0,050	0,100	0,10	560	1310	12,5 x 30	ECR1HLL561M◇◇◇1230	
680		0,195	0,046	0,092	0,10	680	1470	12,5 x 35	ECR1HLL681M◇◇◇1235	
		0,195	0,050	0,100	0,10	680	1210	16 x 20	ECR1HLL681M◇◇◇1620	
820		0,162	0,044	0,088	0,10	820	1590	12,5 x 40	ECR1HLL821M◇◇◇1240	
		0,162	0,048	0,096	0,10	820	1490	16 x 25	ECR1HLL821M◇◇◇1625	
1 000		0,162	0,046	0,092	0,10	820	1450	18 x 20	ECR1HLL821M◇◇◇1820	
	0,133	0,040	0,080	0,10	1000	1890	16 x 31,5	ECR1HLL102M◇◇◇1631		
1 200	0,133	0,040	0,080	0,10	1000	1720	18 x 25	ECR1HLL102M◇◇◇1825		
	0,111	0,032	0,064	0,10	1 200	2140	16 x 35,5	ECR1HLL122M◇◇◇1635		
1 500	0,088	0,026	0,052	0,10	1500	2410	16 x 40	ECR1HLL152M◇◇◇1640		
	0,088	0,026	0,052	0,10	1500	1970	18 x 31,5	ECR1HLL152M◇◇◇1831		
1 800	0,074	0,025	0,050	0,10	1800	2310	18 x 35,5	ECR1HLL182M◇◇◇1835		
2 200	0,072	0,024	0,048	0,12	2 200	2530	18 x 40	ECR1HLL222M◇◇◇1840		
<b>63</b> (79) 1J	12	9,96	1,20	3,60	0,09	16	120	5 x 11,5	ECR1JLL120M◇◇◇0511	
	18	6,64	0,850	2,60	0,09	23	135	5 x 15	ECR1JLL180M◇◇◇0515	
	27	4,43	0,550	1,70	0,09	34	148	6,3 x 11,5	ECR1JLL270M◇◇◇0611	
	39	3,07	0,380	1,10	0,09	50	153	6,3 x 15	ECR1JLL390M◇◇◇0615	
	47	2,55	0,320	0,960	0,09	60	360	8 x 11,5	ECR1JLL470M◇◇◇0811	
	56	2,14	0,230	0,690	0,09	71	448	10 x 12,5	ECR1JLL560M◇◇◇1012	
	68	1,76	0,240	0,720	0,09	86	469	8 x 16	ECR1JLL680M◇◇◇0816	
		1,76	0,170	0,510	0,09	86	553	10 x 16	ECR1JLL680M◇◇◇1016	
	82	1,46	0,170	0,510	0,09	104	682	8 x 20	ECR1JLL820M◇◇◇0820	
	120	0,995	0,120	0,360	0,09	152	676	10 x 20	ECR1JLL121M◇◇◇1020	

**RADIAL**


&gt;&gt;



RADIAL


U <sub>RDC</sub> (Surge Voltage) Code  (V)	C <sub>R</sub> Rated Capacitance  (µF)	ESR <sub>max</sub> Equivalent Series Resistance	Z <sub>max</sub> Max Impedance	Z <sub>max</sub> Max Impedance	tanδ Dissipation Factor	I <sub>leak</sub> Leakage Current  (µA)	I <sub>RAC</sub> Rated Ripple Current  (mA <sub>rms</sub> )	Size  øD x L  (mm)	ORDER CODE  ◇◇ = pin style & length △△ = pitch code  Details: Page 15
		20°C 120Hz (Ω)	20°C 100kHz (Ω)	-10°C 100kHz (Ω)	20°C 120Hz	105°C 100kHz			
63 (79) 1J	150	0,796	0,100	0,300	0,09	189	876	10 x 25	ECR1JLL151M◇◇△△1025
		0,796	0,110	0,330	0,09	189	745	12,5 x 15	ECR1JLL151M◇◇△△1215
		0,796	0,110	0,330	0,09	189	745	12,5 x 15	ECR1JLL151K◇◇△△1215
	180	0,663	0,085	0,260	0,09	227	1020	10 x 30	ECR1JLL181M◇◇△△1030
		0,543	0,075	0,230	0,09	278	979	12,5 x 20	ECR1JLL221M◇◇△△1220
	220	0,543	0,080	0,240	0,09	278	928	16 x 15	ECR1JLL221M◇◇△△1615
		0,442	0,065	0,200	0,09	341	1180	12,5 x 25	ECR1JLL271M◇◇△△1225
	330	0,362	0,065	0,200	0,09	416	1 200	18 x 15	ECR1JLL331M◇◇△△1815
	390	0,306	0,055	0,170	0,09	492	1310	12,5 x 30	ECR1JLL391M◇◇△△1230
		0,306	0,057	0,170	0,09	492	1210	16 x 20	ECR1JLL391M◇◇△△1620
	470	0,254	0,048	0,140	0,09	593	1470	12,5 x 35	ECR1JLL471M◇◇△△1235
		0,254	0,052	0,160	0,09	593	1490	16 x 25	ECR1JLL471M◇◇△△1625
		0,254	0,058	0,170	0,09	593	1460	18 x 20	ECR1JLL471M◇◇△△1820
	560	0,213	0,042	0,130	0,09	706	1590	12,5 x 40	ECR1JLL561M◇◇△△1240
		0,176	0,042	0,130	0,09	857	1890	16 x 31,5	ECR1JLL681M◇◇△△1631
	680	0,176	0,050	0,150	0,09	857	1740	18 x 25	ECR1JLL681M◇◇△△1825
		0,146	0,036	0,110	0,09	1034	2140	16 x 35,5	ECR1JLL821M◇◇△△1635
	820	0,146	0,042	0,130	0,09	1034	1990	18 x 31,5	ECR1JLL821M◇◇△△1831
0,119		0,032	0,096	0,09	1260	2410	16 x 40	ECR1JLL102M◇◇△△1640	
1 000	0,119	0,035	0,110	0,09	1260	2340	18 x 35,5	ECR1JLL102M◇◇△△1835	
	0,100	0,032	0,096	0,09	1512	2560	18 x 40	ECR1JLL122M◇◇△△1840	
100 (125) 2A	5,6	19,0	1,90	7,60	0,08	12	57	5 x 11,5	ECR2ALL5R6M◇◇△△0511
	8,2	13,0	1,30	5,20	0,08	17	74	5 x 15	ECR2ALL8R2M◇◇△△0515
	12	8,85	1,10	4,40	0,08	24	78	6,3 x 11,5	ECR2ALL120M◇◇△△0611
	18	5,90	0,620	2,50	0,08	36	85	6,3 x 15	ECR2ALL180M◇◇△△0615
	22	4,83	0,530	2,10	0,08	44	275	8 x 11,5	ECR2ALL220M◇◇△△0811
	27	3,94	0,470	1,90	0,08	54	319	10 x 12,5	ECR2ALL270M◇◇△△1012
		3,22	0,350	1,40	0,08	66	360	8 x 16	ECR2ALL330M◇◇△△0816
	33	3,22	0,320	1,30	0,08	66	424	10 x 16	ECR2ALL330M◇◇△△1016
		2,73	0,270	1,10	0,08	78	490	8 x 20	ECR2ALL390M◇◇△△0820
	39	2,73	0,270	1,10	0,08	78	490	8 x 20	ECR2ALL390M◇◇△△0820
	56	1,90	0,250	1,00	0,08	112	499	10 x 20	ECR2ALL560M◇◇△△1020
		1,57	0,180	0,720	0,08	136	634	10 x 25	ECR2ALL680M◇◇△△1025
	68	1,57	0,200	0,800	0,08	136	613	12,5 x 15	ECR2ALL680M◇◇△△1215
		1,07	0,150	0,600	0,08	200	739	10 x 30	ECR2ALL101M◇◇△△1030
	100	1,07	0,130	0,520	0,08	200	805	12,5 x 20	ECR2ALL101M◇◇△△1220
		0,885	0,110	0,440	0,08	240	857	12,5 x 25	ECR2ALL121M◇◇△△1225
	120	0,885	0,130	0,500	0,08	240	706	16 x 15	ECR2ALL121M◇◇△△1615
		0,708	0,120	0,480	0,08	300	871	18 x 15	ECR2ALL151M◇◇△△1815
	150	0,590	0,090	0,360	0,08	360	1120	12,5 x 30	ECR2ALL181M◇◇△△1230
		0,590	0,110	0,440	0,08	360	916	16 x 20	ECR2ALL181M◇◇△△1620
	180	0,483	0,075	0,300	0,08	440	1240	12,5 x 35	ECR2ALL221M◇◇△△1235
		0,483	0,081	0,320	0,08	440	1290	16 x 25	ECR2ALL221M◇◇△△1625
	220	0,393	0,060	0,240	0,08	540	1330	12,5 x 40	ECR2ALL271M◇◇△△1240
		0,393	0,085	0,340	0,08	540	1170	18 x 20	ECR2ALL271M◇◇△△1820
270	0,322	0,059	0,230	0,08	660	1630	16 x 31,5	ECR2ALL331M◇◇△△1631	
	0,322	0,071	0,280	0,08	660	1500	18 x 25	ECR2ALL331M◇◇△△1825	
330	0,272	0,052	0,210	0,08	780	1750	16 x 35,5	ECR2ALL391M◇◇△△1635	
	0,272	0,058	0,230	0,08	780	1630	18 x 31,5	ECR2ALL391M◇◇△△1831	
470	0,226	0,045	0,180	0,08	940	1920	16 x 40	ECR2ALL471M◇◇△△1640	
560	0,190	0,054	0,220	0,08	1120	1920	18 x 35,5	ECR2ALL561M◇◇△△1835	
680	0,156	0,041	0,160	0,08	1360	2100	18 x 40	ECR2ALL681M◇◇△△1840	

IMPEDANCE RATIO

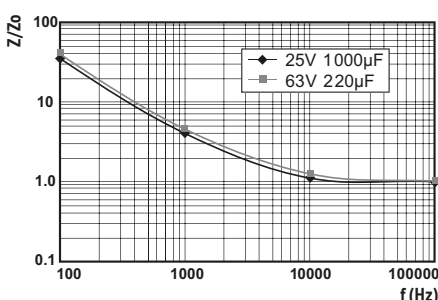


Z = actual impedance of each frequency at 20°C  
 Zo = Impedance at 100kHz, 20°C  
 Impedance Ratio as a function of frequency

CAPACITANCE RATIO

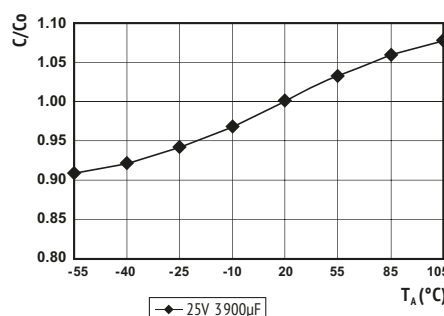

C = actual capacitance of each temperature at 100Hz,  
 Co = Capacitance at 20°C, 100Hz  
 Capacitance Ratio as a function of temperature (typical curve)



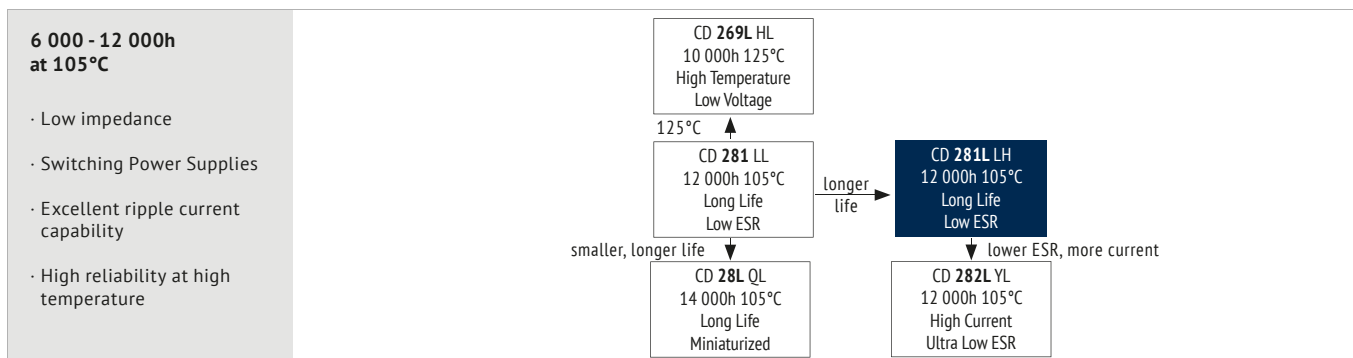

ITEM	CHARACTERISTICS
------	-----------------

Operating Temperature Range (°C)	-55 ~ +105
Voltage Range (V)	6,3 ~ 100
Capacitance Range (µF)	0,47 ~ 15 000
Capacitance Tolerance (20°C, 120Hz)	± 20%

**!** The usage at lower temperatures than indicated may be possible. Please contact the Jianghai Europe sales office for approval.

Leakage Current (µA) After 2 minutes at 20°C application of rated voltage, leakage current is not more than specified in table.

Stability at Low Temperature (Impedance Ratio at 120Hz)	Rated Voltage (V)	6,3 ~ 100
	$Z_{-55°C} / Z_{+20°C}$	3


ITEM	USEFUL LIFE	LOAD LIFE	ENDURANCE TEST	SHELF LIFE
------	-------------	-----------	----------------	------------

Lifetime	6,3~10V:		16~100V:	> 200 000h	6,3~10V:		16~100V:	6,3~10V:		16~100V:	1 000h
	Ø 5~6,3:	Ø 8~10:	Ø 12,5~18:		4 000h	5 000h	6 000h	7 000h	8 000h	10 000h	
Leakage Current	Not more than specified value				Not more than specified value		Not more than specified value		Not more than specified value		
Capacitance Change	Within ± 40% of initial value				Within ± 25% of initial value		Within ± 25% of initial value		Within ± 20% of initial value		
Dissipation Factor	Not more than 300% of specified value				Not more than 200% of specified value		Not more than 200% of specified value		Not more than 200% of specified value		
Condition:	$U_R$		$U_R$		$U_R$		$U_R$	$U_R$		$U_R = 0$	After test: $U_R$ to be applied for 30 min > 24h before measurement
Applied Voltage	$I_R$		$I_R$		$I_R$		$I_R = 0$	$I_R = 0$		$I_R = 0$	
Applied Current	105°C		40°C		105°C		105°C	105°C		105°C	
Applied Temperature								IEC 60384			

**MULTIPLIER FOR RIPPLE CURRENT (FREQUENCY COEFFICIENT)**

Capacitance (µF)	Frequency			
	120Hz	1kHz	10kHz	100kHz
0,47 ~ 4,7	0,40	0,68	0,78	1,00
5,6 ~ 47	0,50	0,76	0,87	1,00
56 ~ 270	0,70	0,85	0,93	1,00
330 ~ 1 000	0,80	0,93	0,98	1,00
1 200 ~ 15 000	0,90	0,95	1,00	1,00

Multipliers for typical operating conditions.

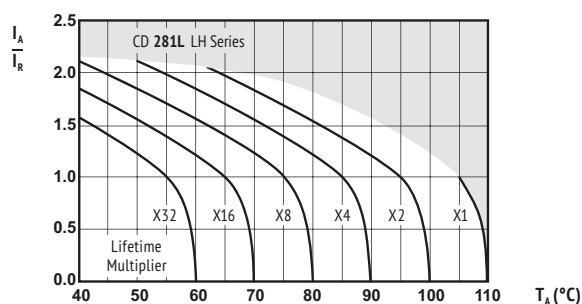**MULTIPLIER FOR LIFETIME (LIFETIME DIAGRAM)**


$I_A$  = actual ripple current at 100kHz,  
 $I_R$  = rated ripple current at 100kHz, 105°C  
 Multiplier of Useful Life as a function of ambient temperature & ripple current load

**ENVIRONMENTAL**

The products are RoHS, WEEE and RECh compliant. The detailed version please see separate "Environmental Certificates" document or [www.jianghai-europe.com](http://www.jianghai-europe.com)

**! SAFETY FACTOR**

This diagram includes a safety margin. In many cases the allowed current capability/lifetime may be increased. For details and approvals please contact the Jianghai Europe sales office.

RADIAL

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance	Z <sub>max</sub> Max Impedance		tanδ Dissipation Factor	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current	Size øD x L	ORDER CODE
			20°C 120kHz	20°C 100kHz					
(V)	(µF)	(Ω)	(Ω)	(Ω)		(µA)	(mA <sub>rms</sub> )	(mm)	Details: Page 15
6,3 (7,2) 0J	100	2,92	0,650	1,30	0,22	13	175	5 x 11,5	ECR0JLH101M◇◇◇◇0511
	150	1,95	0,460	0,920	0,22	19	235	5 x 15	ECR0JLH151M◇◇◇◇0515
	220	1,33	0,300	0,600	0,22	28	290	6,3 x 11,5	ECR0JLH221M◇◇◇◇0611
	330	0,885	0,200	0,400	0,22	42	400	6,3 x 15	ECR0JLH331M◇◇◇◇0615
	470	0,621	0,170	0,340	0,22	60	488	8 x 11,5	ECR0JLH471M◇◇◇◇0811
	680	0,429	0,130	0,260	0,22	86	617	8 x 16	ECR0JLH681M◇◇◇◇0816
		0,429	0,120	0,240	0,22	86	613	10 x 12,5	ECR0JLH681M◇◇◇◇1012
	820	0,356	0,095	0,190	0,22	104	734	10 x 16	ECR0JLH821M◇◇◇◇1016
	1 000	0,292	0,095	0,190	0,22	126	800	8 x 20	ECR0JLH102M◇◇◇◇0820
	1 200	0,243	0,065	0,130	0,22	152	1010	10 x 20	ECR0JLH122M◇◇◇◇1020
		0,243	0,065	0,130	0,22	152	1010	12,5 x 15	ECR0JLH122M◇◇◇◇1215
	1 500	0,195	0,055	0,110	0,22	189	1190	10 x 25	ECR0JLH152M◇◇◇◇1025
	2 200	0,145	0,045	0,090	0,24	278	1440	10 x 30	ECR0JLH222M◇◇◇◇1030
		0,145	0,042	0,084	0,24	278	1400	12,5 x 20	ECR0JLH222M◇◇◇◇1220
	2 700	0,118	0,038	0,076	0,24	341	1690	12,5 x 25	ECR0JLH272M◇◇◇◇1225
		0,118	0,046	0,092	0,24	341	1310	16 x 15	ECR0JLH272M◇◇◇◇1615
	3 300	0,105	0,043	0,086	0,26	416	1460	18 x 15	ECR0JLH332M◇◇◇◇1815
	3 900	0,088	0,032	0,064	0,26	492	1950	12,5 x 30	ECR0JLH392M◇◇◇◇1230
	4 700	0,079	0,028	0,056	0,28	593	2220	12,5 x 35	ECR0JLH472M◇◇◇◇1235
		0,079	0,034	0,068	0,28	593	1660	16 x 20	ECR0JLH472M◇◇◇◇1620
5 600	0,071	0,026	0,052	0,30	706	2390	12,5 x 40	ECR0JLH562M◇◇◇◇1240	
	0,071	0,028	0,056	0,30	706	2070	16 x 25	ECR0JLH562M◇◇◇◇1625	
	0,071	0,030	0,060	0,30	706	1850	18 x 20	ECR0JLH562M◇◇◇◇1820	
6 800	0,062	0,025	0,050	0,32	857	2350	16 x 31,5	ECR0JLH682M◇◇◇◇1631	
	0,062	0,027	0,054	0,32	857	2120	18 x 25	ECR0JLH682M◇◇◇◇1825	
8 200	0,058	0,022	0,044	0,36	1034	2550	16 x 35,5	ECR0JLH822M◇◇◇◇1635	
10 000	0,053	0,023	0,046	0,40	1260	2410	18 x 31,5	ECR0JLH103M◇◇◇◇1831	
12 000	0,049	0,020	0,040	0,44	1512	2970	16 x 40	ECR0JLH123M◇◇◇◇1640	
	0,049	0,020	0,040	0,44	1512	2680	18 x 35,5	ECR0JLH123M◇◇◇◇1835	
15 000	0,044	0,019	0,038	0,50	1890	3010	18 x 40	ECR0JLH153M◇◇◇◇1840	
10 (13) A	82	3,08	0,650	1,30	0,19	17	175	5 x 11,5	ECR1ALH820M◇◇◇◇0511
	100	2,53	0,460	0,920	0,19	20	235	5 x 15	ECR1ALH101M◇◇◇◇0515
	180	1,41	0,300	0,600	0,19	36	290	6,3 x 11,5	ECR1ALH181M◇◇◇◇0611
	220	1,15	0,200	0,400	0,19	44	400	6,3 x 15	ECR1ALH221M◇◇◇◇0615
	330	0,764	0,170	0,340	0,19	66	488	8 x 11,5	ECR1ALH331M◇◇◇◇0811
	470	0,536	0,130	0,260	0,19	94	617	8 x 16	ECR1ALH471M◇◇◇◇0816
		0,536	0,120	0,240	0,19	94	613	10 x 12,5	ECR1ALH471M◇◇◇◇1012
	560	0,450	0,095	0,190	0,19	112	734	10 x 16	ECR1ALH561M◇◇◇◇1016
	680	0,374	0,095	0,190	0,19	136	800	8 x 20	ECR1ALH681M◇◇◇◇0820
	1 000	0,252	0,065	0,130	0,19	200	1010	10 x 20	ECR1ALH102M◇◇◇◇1020
		0,252	0,065	0,130	0,19	200	1010	12,5 x 15	ECR1ALH102M◇◇◇◇1215
	1 200	0,210	0,055	0,110	0,19	240	1190	10 x 25	ECR1ALH122M◇◇◇◇1025
	1 500	0,168	0,045	0,090	0,19	300	1440	10 x 30	ECR1ALH152M◇◇◇◇1030
	1 800	0,140	0,042	0,084	0,19	360	1400	12,5 x 20	ECR1ALH182M◇◇◇◇1220
		0,140	0,046	0,092	0,19	360	1310	16 x 15	ECR1ALH182M◇◇◇◇1615
	2 200	0,127	0,038	0,076	0,21	440	1690	12,5 x 25	ECR1ALH222M◇◇◇◇1225
		0,127	0,043	0,086	0,21	440	1460	18 x 15	ECR1ALH222M◇◇◇◇1815
	2 700	0,103	0,032	0,064	0,21	540	1950	12,5 x 30	ECR1ALH272M◇◇◇◇1230
	3 300	0,092	0,028	0,056	0,23	660	2220	12,5 x 35	ECR1ALH332M◇◇◇◇1235
		0,092	0,034	0,068	0,23	660	1660	16 x 20	ECR1ALH332M◇◇◇◇1620
3 800	0,078	0,026	0,052	0,23	760	2390	12,5 x 40	ECR1ALH382M◇◇◇◇1240	
	0,078	0,028	0,056	0,23	760	2070	16 x 25	ECR1ALH382M◇◇◇◇1625	
	0,078	0,030	0,060	0,23	760	1850	18 x 20	ECR1ALH382M◇◇◇◇1820	
4 700	0,071	0,027	0,054	0,25	940	2120	18 x 25	ECR1ALH472M◇◇◇◇1825	
5 600	0,064	0,025	0,050	0,27	1120	2350	16 x 31,5	ECR1ALH562M◇◇◇◇1631	
6 800	0,057	0,022	0,044	0,29	1360	2550	16 x 35,5	ECR1ALH682M◇◇◇◇1635	
	0,057	0,023	0,046	0,29	1360	2410	18 x 31,5	ECR1ALH682M◇◇◇◇1831	
8 200	0,053	0,020	0,040	0,33	1640	2970	16 x 40	ECR1ALH822M◇◇◇◇1640	
	0,053	0,020	0,040	0,33	1640	2680	18 x 35,5	ECR1ALH822M◇◇◇◇1835	
10 000	0,049	0,019	0,038	0,37	2000	3010	18 x 40	ECR1ALH103M◇◇◇◇1840	
16 (20) 1C	56	3,80	0,650	1,30	0,16	18	175	5 x 11,5	ECR1CLH560M◇◇◇◇0511
	82	2,59	0,460	0,920	0,16	27	235	5 x 15	ECR1CLH820M◇◇◇◇0515
	120	1,77	0,300	0,600	0,16	39	290	6,3 x 11,5	ECR1CLH121M◇◇◇◇0611
	180	1,18	0,200	0,400	0,16	58	400	6,3 x 15	ECR1CLH181M◇◇◇◇0615
	270	0,786	0,170	0,340	0,16	87	501	8 x 11,5	ECR1CLH271M◇◇◇◇0811





U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub>	Z <sub>max</sub>	Z <sub>max</sub>	tanδ	I <sub>leak</sub>	I <sub>RAC</sub>	Size	ORDER CODE
		Equivalent Series Resistance	Max Impedance	Max Impedance					
(V)	(µF)	20°C 120Hz	20°C 100kHz	-10°C 100kHz	20°C 120Hz	(µA)	(mArms)	(mm)	Details: Page 15
16 (20) 1C	330	0,643	0,130	0,260	0,16	106	575	8 x 16	ECR1CLH331M◇◇△△0816
		0,643	0,120	0,240	0,16	106	625	10 x 12,5	ECR1CLH331M◇◇△△1012
	390	0,544	0,095	0,190	0,16	125	795	10 x 16	ECR1CLH391M◇◇△△1016
		0,452	0,095	0,190	0,16	151	760	8 x 20	ECR1CLH471M◇◇△△0820
	470	0,312	0,065	0,130	0,16	218	1010	10 x 20	ECR1CLH681M◇◇△△1020
		0,312	0,065	0,130	0,16	218	1010	12,5 x 15	ECR1CLH681M◇◇△△1215
	680	0,259	0,055	0,110	0,16	263	1190	10 x 25	ECR1CLH821M◇◇△△1025
		1 200	0,177	0,045	0,090	0,16	384	1430	10 x 30
	1 500		0,177	0,042	0,084	0,16	384	1400	12,5 x 20
		1 500	0,142	0,038	0,076	0,16	480	1690	12,5 x 25
	1 500		0,142	0,046	0,092	0,16	480	1340	16 x 15
		2 200	0,142	0,043	0,086	0,16	480	1490	18 x 15
	2 200		0,109	0,032	0,064	0,18	704	1950	12,5 x 30
		2 200	0,109	0,034	0,068	0,18	704	1730	16 x 20
	2 700		0,088	0,028	0,056	0,18	864	2200	12,5 x 35
		2 700	0,088	0,028	0,056	0,18	864	2070	16 x 25
	2 700		0,088	0,030	0,060	0,18	864	1870	18 x 20
		3 300	0,080	0,026	0,052	0,20	1056	2390	12,5 x 40
	3 900		0,068	0,025	0,050	0,20	1248	2350	16 x 31,5
		3 900	0,068	0,027	0,054	0,20	1248	2160	18 x 25
4 700	0,062		0,022	0,044	0,22	1504	2550	16 x 35,5	ECR1CLH472M◇◇△△1635
	4 700	0,062	0,023	0,046	0,22	1504	2450	18 x 31,5	ECR1CLH472M◇◇△△1831
5 600		0,057	0,020	0,040	0,24	1792	2900	16 x 40	ECR1CLH562M◇◇△△1640
6 800	0,051	0,020	0,040	0,26	2176	2730	18 x 35,5	ECR1CLH682M◇◇△△1835	
8 200	0,049	0,019	0,038	0,30	2624	3060	18 x 40	ECR1CLH822M◇◇△△1840	

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub>	Z <sub>max</sub>	Z <sub>max</sub>	tanδ	I <sub>leak</sub>	I <sub>RAC</sub>	Size	ORDER CODE
		Equivalent Series Resistance	Max Impedance	Max Impedance					
(V)	(µF)	20°C 120Hz	20°C 100kHz	-10°C 100kHz	20°C 120Hz	(µA)	(mArms)	(mm)	Details: Page 15
25 (32) 1E	39	4,77	0,650	1,30	0,14	20	175	5 x 11,5	ECR1ELH390M◇◇△△0511
	56	3,32	0,460	0,920	0,14	28	235	5 x 15	ECR1ELH560M◇◇△△0515
	82	2,27	0,300	0,600	0,14	41	290	6,3 x 11,5	ECR1ELH820M◇◇△△0611
	120	1,55	0,200	0,400	0,14	60	400	6,3 x 15	ECR1ELH121M◇◇△△0615
	180	1,04	0,170	0,340	0,14	90	503	8 x 11,5	ECR1ELH181M◇◇△△0811
	220	0,844	0,130	0,260	0,14	110	575	8 x 16	ECR1ELH221M◇◇△△0816
		0,844	0,120	0,240	0,14	110	629	10 x 12,5	ECR1ELH221M◇◇△△1012
	270	0,688	0,095	0,190	0,14	135	795	10 x 16	ECR1ELH271M◇◇△△1016
	330	0,563	0,095	0,190	0,14	165	751	8 x 20	ECR1ELH331M◇◇△△0820
	470	0,395	0,065	0,130	0,14	235	1010	10 x 20	ECR1ELH471M◇◇△△1020
		0,395	0,065	0,130	0,14	235	1010	12,5 x 15	ECR1ELH471M◇◇△△1215
	560	0,332	0,055	0,110	0,14	280	1190	10 x 25	ECR1ELH561M◇◇△△1025
	820	0,227	0,045	0,090	0,14	410	1440	10 x 30	ECR1ELH821M◇◇△△1030
		0,227	0,042	0,084	0,14	410	1400	12,5 x 20	ECR1ELH821M◇◇△△1220
	820	0,227	0,046	0,092	0,14	410	1360	16 x 15	ECR1ELH821M◇◇△△1615
		1 000	0,186	0,038	0,076	0,14	500	1690	12,5 x 25
	1 200	0,155	0,043	0,086	0,14	600	1500	18 x 15	ECR1ELH122M◇◇△△1815
	1 500	0,124	0,032	0,064	0,14	750	1950	12,5 x 30	ECR1ELH152M◇◇△△1230
		0,124	0,034	0,068	0,14	750	1730	16 x 20	ECR1ELH152M◇◇△△1620
	1 800	0,103	0,028	0,056	0,14	900	2200	12,5 x 35	ECR1ELH182M◇◇△△1235
0,103		0,028	0,056	0,14	900	2070	16 x 25	ECR1ELH182M◇◇△△1625	
1 800	0,103	0,030	0,060	0,14	900	1890	18 x 20	ECR1ELH182M◇◇△△1820	
	2 200	0,097	0,026	0,052	0,16	1100	2390	12,5 x 40	ECR1ELH222M◇◇△△1240
2 700	0,079	0,025	0,050	0,16	1350	2350	16 x 31,5	ECR1ELH272M◇◇△△1631	
	0,079	0,027	0,054	0,16	1350	2180	18 x 25	ECR1ELH272M◇◇△△1825	
3 300	0,072	0,022	0,044	0,18	1650	2550	16 x 35,5	ECR1ELH332M◇◇△△1635	
	0,072	0,023	0,046	0,18	1650	2470	18 x 31,5	ECR1ELH332M◇◇△△1831	
3 900	0,061	0,020	0,040	0,18	1950	2900	16 x 40	ECR1ELH392M◇◇△△1640	
	0,061	0,020	0,040	0,18	1950	2740	18 x 35,5	ECR1ELH392M◇◇△△1835	
4 700	0,056	0,019	0,038	0,20	2350	3070	18 x 40	ECR1ELH472M◇◇△△1840	

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub>	Z <sub>max</sub>	Z <sub>max</sub>	tanδ	I <sub>leak</sub>	I <sub>RAC</sub>	Size	ORDER CODE
		Equivalent Series Resistance	Max Impedance	Max Impedance					
(V)	(µF)	20°C 120Hz	20°C 100kHz	-10°C 100kHz	20°C 120Hz	(µA)	(mArms)	(mm)	Details: Page 15
35 (44) 1V	27	5,90	0,650	1,30	0,12	19	175	5 x 11,5	ECR1VLH270M◇◇△△0511
	39	4,09	0,460	0,920	0,12	28	235	5 x 15	ECR1VLH390M◇◇△△0515
	56	2,85	0,300	0,600	0,12	40	290	6,3 x 11,5	ECR1VLH560M◇◇△△0611
	82	1,95	0,200	0,400	0,12	58	400	6,3 x 15	ECR1VLH820M◇◇△△0615
	120	1,33	0,170	0,340	0,12	84	501	8 x 11,5	ECR1VLH121M◇◇△△0811
	150	1,07	0,120	0,240	0,12	105	625	10 x 12,5	ECR1VLH151M◇◇△△1012
	180	0,885	0,130	0,260	0,12	126	575	8 x 16	ECR1VLH181M◇◇△△0816
		0,885	0,095	0,190	0,12	126	795	10 x 16	ECR1VLH181M◇◇△△1016
	220	0,724	0,095	0,190	0,12	154	760	8 x 20	ECR1VLH221M◇◇△△0820
	330	0,483	0,065	0,130	0,12	231	1010	10 x 20	ECR1VLH331M◇◇△△1020
		0,483	0,065	0,130	0,12	231	1010	12,5 x 15	ECR1VLH331M◇◇△△1215

&gt;&gt;

RADIAL


U <sub>RDC</sub> (Surge Voltage) Code  (V)	C <sub>R</sub> Rated Capacitance  (µF)	ESR <sub>max</sub> Equivalent Series Resistance	Z <sub>max</sub> Max Impedance	Z <sub>max</sub> Max Impedance	tanδ Dissipation Factor	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current	Size  øD x L  (mm)	ORDER CODE
		20°C 120Hz (Ω)	20°C 100kHz (Ω)	-10°C 100kHz (Ω)	20°C 120Hz	20°C 100kHz	105°C 100kHz		
35 (44) 1V	390	0,408	0,055	0,110	0,12	273	1190	10 x 25	ECR1VLH391M◇◇△△1025
		0,284	0,045	0,090	0,12	392	1450	10 x 30	ECR1VLH561M◇◇△△1030
	560	0,284	0,042	0,084	0,12	392	1400	12,5 x 20	ECR1VLH561M◇◇△△1220
		0,284	0,046	0,092	0,12	392	1360	16 x 15	ECR1VLH561M◇◇△△1615
	680	0,234	0,038	0,076	0,12	476	1690	12,5 x 25	ECR1VLH681M◇◇△△1225
		0,234	0,043	0,086	0,12	476	1520	18 x 15	ECR1VLH681M◇◇△△1815
	1 000	0,159	0,032	0,064	0,12	700	1950	12,5 x 30	ECR1VLH102M◇◇△△1230
		0,159	0,034	0,068	0,12	700	1730	16 x 20	ECR1VLH102M◇◇△△1620
	1 200	0,133	0,028	0,056	0,12	840	2200	12,5 x 35	ECR1VLH122M◇◇△△1235
		0,133	0,028	0,056	0,12	840	2070	16 x 25	ECR1VLH122M◇◇△△1625
	1 500	0,133	0,030	0,060	0,12	840	1900	18 x 20	ECR1VLH122M◇◇△△1820
		0,106	0,026	0,052	0,12	1050	2390	12,5 x 40	ECR1VLH152M◇◇△△1240
	1 800	0,088	0,025	0,050	0,12	1260	2350	16 x 31,5	ECR1VLH182M◇◇△△1631
		0,088	0,027	0,054	0,12	1260	2200	18 x 25	ECR1VLH182M◇◇△△1825
	2 200	0,084	0,022	0,044	0,14	1540	2550	16 x 35,5	ECR1VLH222M◇◇△△1635
		0,084	0,023	0,046	0,14	1540	2490	18 x 31,5	ECR1VLH222M◇◇△△1831
	2 700	0,069	0,020	0,040	0,14	1890	2900	16 x 40	ECR1VLH272M◇◇△△1640
		0,069	0,020	0,040	0,14	1890	2770	18 x 35,5	ECR1VLH272M◇◇△△1835
3 300	0,064	0,019	0,038	0,16	2310	3110	18 x 40	ECR1VLH332M◇◇△△1840	
50 (63) 1H	0,47	283	3,90	7,80	0,10	3	22	5 x 11,5	ECR1HLHR47M◇◇△△0511
	1,0	133	3,50	7,00	0,10	3	36	5 x 11,5	ECR1HLH010M◇◇△△0511
	2,2	60,3	3,00	6,00	0,10	3	54	5 x 11,5	ECR1HLH2R2M◇◇△△0511
	3,3	40,2	2,60	5,20	0,10	4	63	5 x 11,5	ECR1HLH3R3M◇◇△△0511
	4,7	28,3	2,20	4,40	0,10	5	75	5 x 11,5	ECR1HLH4R7M◇◇△△0511
	10	13,3	1,40	2,80	0,10	10	110	5 x 11,5	ECR1HLH100M◇◇△△0511
	18	7,38	0,950	1,90	0,10	18	120	5 x 11,5	ECR1HLH180M◇◇△△0511
	27	4,92	0,550	1,10	0,10	27	135	5 x 15	ECR1HLH270M◇◇△△0515
	39	3,41	0,360	0,720	0,10	39	148	6,3 x 11,5	ECR1HLH390M◇◇△△0611
	56	2,37	0,280	0,560	0,10	56	153	6,3 x 15	ECR1HLH560M◇◇△△0615
	68	1,96	0,200	0,400	0,10	68	360	8 x 11,5	ECR1HLH680M◇◇△△0811
	82	1,62	0,180	0,360	0,10	82	460	8 x 16	ECR1HLH820M◇◇△△0816
		1,62	0,180	0,360	0,10	82	443	10 x 12,5	ECR1HLH820M◇◇△△1012
	100	1,33	0,150	0,300	0,10	100	553	10 x 16	ECR1HLH101M◇◇△△1016
	120	1,11	0,130	0,260	0,10	120	670	8 x 20	ECR1HLH121M◇◇△△0820
	180	0,737	0,095	0,190	0,10	180	676	10 x 20	ECR1HLH181M◇◇△△1020
		0,737	0,105	0,210	0,10	180	745	12,5 x 15	ECR1HLH181M◇◇△△1215
	220	0,603	0,080	0,160	0,10	220	876	10 x 25	ECR1HLH221M◇◇△△1025
	330	0,402	0,065	0,130	0,10	330	1010	10 x 30	ECR1HLH331M◇◇△△1030
		0,402	0,070	0,140	0,10	330	979	12,5 x 20	ECR1HLH331M◇◇△△1220
		0,402	0,075	0,150	0,10	330	982	16 x 15	ECR1HLH331M◇◇△△1615
	470	0,282	0,054	0,108	0,10	470	1180	12,5 x 25	ECR1HLH471M◇◇△△1225
		0,282	0,058	0,116	0,10	470	1180	18 x 15	ECR1HLH471M◇◇△△1815
	560	0,237	0,050	0,100	0,10	560	1310	12,5 x 30	ECR1HLH561M◇◇△△1230
	680	0,195	0,046	0,092	0,10	680	1470	12,5 x 35	ECR1HLH681M◇◇△△1235
		0,195	0,050	0,100	0,10	680	1210	16 x 20	ECR1HLH681M◇◇△△1620
	820	0,162	0,044	0,088	0,10	820	1590	12,5 x 40	ECR1HLH821M◇◇△△1240
		0,162	0,048	0,096	0,10	820	1490	16 x 25	ECR1HLH821M◇◇△△1625
0,162		0,046	0,092	0,10	820	1450	18 x 20	ECR1HLH821M◇◇△△1820	
1 000	0,133	0,040	0,080	0,10	1000	1890	16 x 31,5	ECR1HLH102M◇◇△△1631	
	0,133	0,040	0,080	0,10	1000	1720	18 x 25	ECR1HLH102M◇◇△△1825	
1 200	0,111	0,032	0,064	0,10	1200	2140	16 x 35,5	ECR1HLH122M◇◇△△1635	
1 500	0,088	0,026	0,052	0,10	1500	2410	16 x 40	ECR1HLH152M◇◇△△1640	
	0,088	0,026	0,052	0,10	1500	1970	18 x 31,5	ECR1HLH152M◇◇△△1831	
1 800	0,074	0,025	0,050	0,10	1800	2310	18 x 35,5	ECR1HLH182M◇◇△△1835	
2 200	0,072	0,024	0,048	0,12	2200	2530	18 x 40	ECR1HLH222M◇◇△△1840	
63 (79) 1J	12	9,96	1,20	3,60	0,09	16	120	5 x 11,5	ECR1JLH120M◇◇△△0511
	18	6,64	0,850	2,60	0,09	23	135	5 x 15	ECR1JLH180M◇◇△△0515
	27	4,43	0,550	1,70	0,09	34	148	6,3 x 11,5	ECR1JLH270M◇◇△△0611
	39	3,07	0,380	1,10	0,09	50	153	6,3 x 15	ECR1JLH390M◇◇△△0615
	47	2,55	0,320	0,960	0,09	60	360	8 x 11,5	ECR1JLH470M◇◇△△0811
	56	2,14	0,230	0,690	0,09	71	448	10 x 12,5	ECR1JLH560M◇◇△△1012
	68	1,76	0,240	0,720	0,09	86	469	8 x 16	ECR1JLH680M◇◇△△0816
		1,76	0,170	0,510	0,09	86	553	10 x 16	ECR1JLH680M◇◇△△1016
	82	1,46	0,170	0,510	0,09	104	682	8 x 20	ECR1JLH820M◇◇△△0820
	120	0,995	0,120	0,360	0,09	152	676	10 x 20	ECR1JLH121M◇◇△△1020



U <sub>RDC</sub> (Surge Voltage) Code  (V)	C <sub>R</sub> Rated Capacitance  (µF)	ESR <sub>max</sub> Equivalent Series Resistance	Z <sub>max</sub> Max Impedance	Z <sub>max</sub> Max Impedance	tanδ Dissipation Factor	I <sub>leak</sub> Leakage Current  (µA)	I <sub>RAC</sub> Rated Ripple Current  (mArms)	Size  øD x L  (mm)	ORDER CODE  ◇◇ = pin style & length △△ = pitch code  Details: Page 15
		20°C 120Hz (Ω)	20°C 100kHz (Ω)	-10°C 100kHz (Ω)	20°C 120Hz	105°C 100kHz			
<b>63</b> (79) 1J	150	0,796	0,100	0,300	0,09	189	876	10 x 25	ECR1JLH151M◇◇△△1025
		0,796	0,110	0,330	0,09	189	745	12,5 x 15	ECR1JLH151M◇◇△△1215
	180	0,663	0,085	0,260	0,09	227	1020	10 x 30	ECR1JLH181M◇◇△△1030
		0,543	0,075	0,230	0,09	278	979	12,5 x 20	ECR1JLH221M◇◇△△1220
	220	0,543	0,080	0,240	0,09	278	928	16 x 15	ECR1JLH221M◇◇△△1615
		0,442	0,065	0,200	0,09	341	1180	12,5 x 25	ECR1JLH271M◇◇△△1225
	330	0,362	0,065	0,200	0,09	416	1200	18 x 15	ECR1JLH331M◇◇△△1815
		390	0,306	0,055	0,170	0,09	492	1310	12,5 x 30
	470		0,306	0,057	0,170	0,09	492	1210	16 x 20
		470	0,254	0,048	0,140	0,09	593	1470	12,5 x 35
	470		0,254	0,052	0,160	0,09	593	1490	16 x 25
		470	0,254	0,058	0,170	0,09	593	1460	18 x 20
	560		0,213	0,042	0,130	0,09	706	1590	12,5 x 40
		680	0,176	0,042	0,130	0,09	857	1890	16 x 31,5
	680		0,176	0,050	0,150	0,09	857	1740	18 x 25
		820	0,146	0,036	0,110	0,09	1034	2140	16 x 35,5
	820		0,146	0,042	0,130	0,09	1034	1990	18 x 31,5
		1 000	0,119	0,032	0,096	0,09	1260	2410	16 x 40
1 000	0,119		0,035	0,110	0,09	1260	2340	18 x 35,5	ECR1JLH102M◇◇△△1835
	1 200	0,100	0,032	0,096	0,09	1512	2560	18 x 40	ECR1JLH122M◇◇△△1840

U <sub>RDC</sub> (Surge Voltage) Code  (V)	C <sub>R</sub> Rated Capacitance  (µF)	ESR <sub>max</sub> Equivalent Series Resistance	Z <sub>max</sub> Max Impedance	Z <sub>max</sub> Max Impedance	tanδ Dissipation Factor	I <sub>leak</sub> Leakage Current  (µA)	I <sub>RAC</sub> Rated Ripple Current  (mArms)	Size  øD x L  (mm)	ORDER CODE  ◇◇ = pin style & length △△ = pitch code  Details: Page 15
		20°C 120Hz (Ω)	20°C 100kHz (Ω)	-10°C 100kHz (Ω)	20°C 120Hz	105°C 100kHz			
<b>100</b> (125) 2A	5,6	19,0	1,90	7,60	0,08	12	57	5 x 11,5	ECR2ALH5R6M◇◇△△0511
	8,2	13,0	1,30	5,20	0,08	17	74	5 x 15	ECR2ALH8R2M◇◇△△0515
	12	8,85	1,10	4,40	0,08	24	78	6,3 x 11,5	ECR2ALH120M◇◇△△0611
	18	5,90	0,620	2,50	0,08	36	85	6,3 x 15	ECR2ALH180M◇◇△△0615
	22	4,83	0,530	2,10	0,08	44	275	8 x 11,5	ECR2ALH220M◇◇△△0811
	27	3,94	0,470	1,90	0,08	54	319	10 x 12,5	ECR2ALH270M◇◇△△1012
		3,22	0,350	1,40	0,08	66	360	8 x 16	ECR2ALH330M◇◇△△0816
	33	3,22	0,320	1,30	0,08	66	424	10 x 16	ECR2ALH330M◇◇△△1016
		39	2,73	0,270	1,10	0,08	78	490	8 x 20
	56	1,90	0,250	1,00	0,08	112	499	10 x 20	ECR2ALH560M◇◇△△1020
	68	1,57	0,180	0,720	0,08	136	634	10 x 25	ECR2ALH680M◇◇△△1025
		1,57	0,200	0,800	0,08	136	613	12,5 x 15	ECR2ALH680M◇◇△△1215
	100	1,07	0,150	0,600	0,08	200	739	10 x 30	ECR2ALH101M◇◇△△1030
		1,07	0,130	0,520	0,08	200	805	12,5 x 20	ECR2ALH101M◇◇△△1220
	120	0,885	0,110	0,440	0,08	240	857	12,5 x 25	ECR2ALH121M◇◇△△1225
		0,885	0,130	0,500	0,08	240	706	16 x 15	ECR2ALH121M◇◇△△1615
	150	0,708	0,120	0,480	0,08	300	871	18 x 15	ECR2ALH151M◇◇△△1815
	180	0,590	0,090	0,360	0,08	360	1120	12,5 x 30	ECR2ALH181M◇◇△△1230
		0,590	0,110	0,440	0,08	360	916	16 x 20	ECR2ALH181M◇◇△△1620
	220	0,483	0,075	0,300	0,08	440	1240	12,5 x 35	ECR2ALH221M◇◇△△1235
		0,483	0,081	0,320	0,08	440	1290	16 x 25	ECR2ALH221M◇◇△△1625
	270	0,393	0,060	0,240	0,08	540	1330	12,5 x 40	ECR2ALH271M◇◇△△1240
		0,393	0,085	0,340	0,08	540	1170	18 x 20	ECR2ALH271M◇◇△△1820
	330	0,322	0,059	0,230	0,08	660	1630	16 x 31,5	ECR2ALH331M◇◇△△1631
0,322		0,071	0,280	0,08	660	1500	18 x 25	ECR2ALH331M◇◇△△1825	
390	0,272	0,052	0,210	0,08	780	1750	16 x 35,5	ECR2ALH391M◇◇△△1635	
	0,272	0,058	0,230	0,08	780	1630	18 x 31,5	ECR2ALH391M◇◇△△1831	
470	0,226	0,045	0,180	0,08	940	1920	16 x 40	ECR2ALH471M◇◇△△1640	
560	0,190	0,054	0,220	0,08	1120	1920	18 x 35,5	ECR2ALH561M◇◇△△1835	
680	0,156	0,041	0,160	0,08	1360	2100	18 x 40	ECR2ALH681M◇◇△△1840	


### IMPEDANCE RATIO

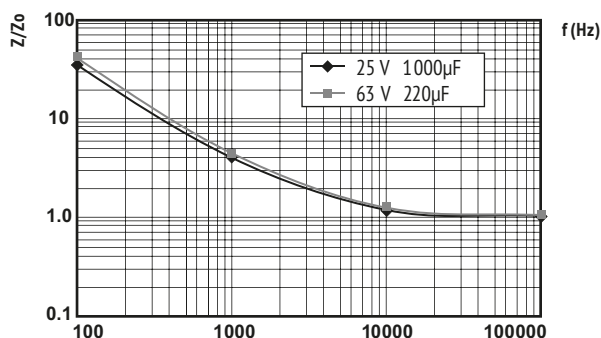

Z = actual impedance of each frequency at 20°C,  
Zo = Impedance at 100kHz, 20°C  
Impedance Ratio as a function of frequency

4 000 - 10 000h at 105°C

- Ultra Low Impedance
- High Ripple Current
- Switching Power Supplies

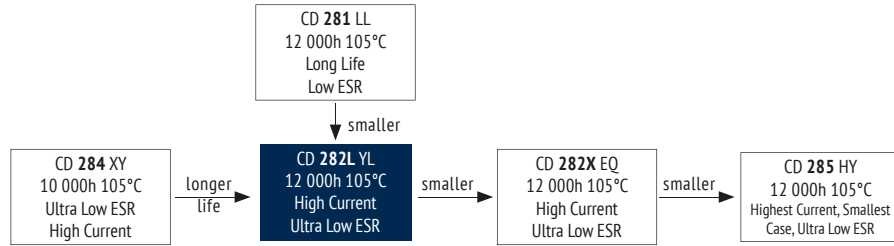

ITEM CHARACTERISTICS

Operating Temperature Range (°C)	-40 ~ +105
Voltage Range (V)	6,3 ~ 100
Capacitance Range (µF)	6,8 ~ 18 000
Capacitance Tolerance (20°C, 120Hz)	± 20%

**!** The usage at lower temperatures than indicated may be possible. Please contact the Jianghai Europe sales office for approval.

Leakage Current (µA) After 2 minutes at 20°C application of rated voltage, leakage current is not more than specified in table.

Stability at Low Temperature (Impedance Ratio at 120Hz)	Rated Voltage (V)	6,3	10	16	25	35	50	63	100
	Z <sub>-25°C</sub> / Z <sub>+20°C</sub>		4	3			2		
Z <sub>-40°C</sub> / Z <sub>+20°C</sub>		8	6	4			3		


ITEM	USEFUL LIFE			LOAD LIFE		ENDURANCE TEST		SHELF LIFE
	6,3-10V:	16-100V:		6,3-10V:	16-100V:	6,3-10V:	16-100V:	
Lifetime	∅ 5-6,3: ∅ 8-10: ∅ 12,5-18:	6 000h 7 000h 8 000h 9 000h 10 000h	7 000h 9 000h 12 000h	> 250 000h	4 000h 5 000h 6 000h 7 000h 8 000h 10 000h	6 000h 7 000h 8 000h 9 000h 10 000h 12 000h	1 000h	
Leakage Current	Not more than specified value			Not more than specified value		Not more than specified value		Not more than specified value
Capacitance Change	Within ± 40% of initial value			Within ± 25% of initial value		Within ± 25% of initial value		Within ± 20% of initial value
Dissipation Factor	Not more than 300% of specified value			Not more than 200% of specified value		Not more than 200% of specified value		Not more than 200% of specified value
Condition:								
Applied Voltage	U <sub>R</sub>	U <sub>R</sub>		U <sub>R</sub>	U <sub>R</sub>	U <sub>R</sub>	U <sub>R</sub> = 0	After test: U <sub>R</sub> to be applied for 30 min > 24h before measurement
Applied Current	I <sub>R</sub>	1,4 x I <sub>R</sub>		I <sub>R</sub>	I <sub>R</sub> = 0	I <sub>R</sub> = 0	I <sub>R</sub> = 0	
Applied Temperature	105°C	40°C		105°C	105°C	105°C	105°C	
					IEC 60384			

MULTIPLIER FOR RIPPLE CURRENT (FREQUENCY COEFFICIENT)

Capacitance (µF)	Frequency			
	120Hz	1kHz	10kHz	100kHz
6,8 ~ 33	0,42	0,70	0,90	1,00
39 ~ 270	0,50	0,73	0,92	1,00
330 ~ 680	0,55	0,77	0,94	1,00
820 ~ 1 800	0,60	0,80	0,96	1,00
2 200 ~ 18 000	0,70	0,85	0,98	1,00

Multipliers for typical operating conditions.

MULTIPLIER FOR LIFETIME (LIFETIME DIAGRAM)

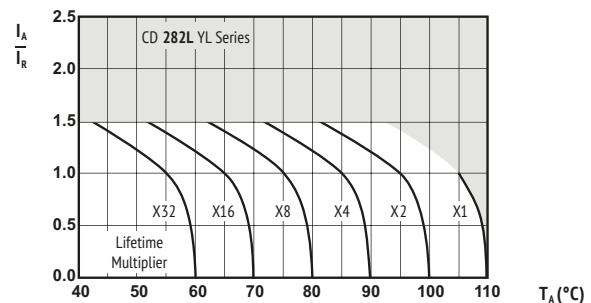

I<sub>A</sub> = actual ripple current at 100kHz,  
I<sub>R</sub> = rated ripple current at 100kHz, 105°C  
Multiplier of Useful Life as a function of ambient temperature & ripple current load

ENVIRONMENTAL

The products are RoHS, WEEE and REACH compliant. The detailed version please see separate "Environmental Certificates" document or www.jianghai-europe.com

**!** SAFETY FACTOR

This diagram includes a safety margin. In many cases the allowed current capability/lifetime may be increased. For details and approvals please contact the Jianghai Europe sales office.





U <sub>RDC</sub> (Surge Voltage) Code  (V)	C <sub>R</sub> Rated Capacitance  (µF)	ESR <sub>max</sub> Equivalent Series Resistance	Z <sub>max</sub> Max Impedance	Z <sub>max</sub> Max Impedance	tanδ Dissipation Factor	I <sub>leak</sub> Leakage Current  (µA)	I <sub>RAC</sub> Rated Ripple Current  (mArms)	Size  øD x L  (mm)	ORDER CODE
		20°C 120Hz (Ω)	20°C 100kHz (Ω)	-10°C 100kHz (Ω)	20°C 120Hz	105°C 100kHz	Details: Page 15		
<b>6,3</b> <b>(7,2)</b> <b>0J</b>	150	1,95	0,580	2,30	0,22	10	210	5 x 11,5	ECROJYL151M◇◇◇◇0511
	330	0,884	0,220	0,870	0,22	21	340	6,3 x 11,5	ECROJYL331M◇◇◇◇0611
	680	0,429	0,130	0,520	0,22	43	640	8 x 11,5	ECROJYL681M◇◇◇◇0811
	820	0,356	0,080	0,320	0,22	52	865	10 x 12,5	ECROJYL821M◇◇◇◇1012
		1 000	0,292	0,087	0,350	0,22	63	840	8 x 16
	1 200	0,243	0,069	0,270	0,22	76	1050	8 x 20	ECROJYL122M◇◇◇◇0820
		0,243	0,060	0,240	0,22	76	1210	10 x 16	ECROJYL122M◇◇◇◇1016
	1 500	0,195	0,046	0,180	0,22	95	1400	10 x 20	ECROJYL152M◇◇◇◇1020
	1 800	0,162	0,049	0,160	0,22	114	1450	12,5 x 16	ECROJYL182M◇◇◇◇1216
	2 200	0,145	0,042	0,170	0,24	139	1650	10 x 25	ECROJYL222M◇◇◇◇1025
		0,118	0,031	0,120	0,24	171	1910	10 x 30	ECROJYL272M◇◇◇◇1030
	2 700	0,118	0,042	0,120	0,24	171	1940	16 x 16	ECROJYL272M◇◇◇◇1616
		3 300	0,104	0,035	0,120	0,26	208	1900	12,5 x 20
	3 900	0,088	0,027	0,089	0,26	246	2230	12,5 x 25	ECROJYL392M◇◇◇◇1225
		0,088	0,043	0,110	0,26	246	2210	18 x 16	ECROJYL392M◇◇◇◇1816
	4 700	0,079	0,024	0,078	0,28	297	2650	12,5 x 30	ECROJYL472M◇◇◇◇1230
	5 600	0,071	0,020	0,065	0,30	353	2880	12,5 x 35	ECROJYL562M◇◇◇◇1235
		0,071	0,027	0,078	0,30	353	2530	16 x 20	ECROJYL562M◇◇◇◇1620
6 800	0,062	0,017	0,056	0,32	429	3350	12,5 x 40	ECROJYL682M◇◇◇◇1240	
	0,062	0,021	0,060	0,32	429	2930	16 x 25	ECROJYL682M◇◇◇◇1625	
	0,062	0,026	0,067	0,32	429	2860	18 x 20	ECROJYL682M◇◇◇◇1820	
8 200	0,058	0,017	0,050	0,36	517	3450	16 x 31,5	ECROJYL822M◇◇◇◇1631	
	0,053	0,015	0,044	0,40	630	3610	16 x 35,5	ECROJYL103M◇◇◇◇1635	
10 000	0,053	0,019	0,049	0,40	630	3140	18 x 25	ECROJYL103M◇◇◇◇1825	
	0,049	0,013	0,038	0,44	756	4080	16 x 40	ECROJYL123M◇◇◇◇1640	
12 000	0,049	0,015	0,040	0,44	756	4170	18 x 31,5	ECROJYL123M◇◇◇◇1831	
	0,044	0,014	0,038	0,50	945	4220	18 x 35,5	ECROJYL153M◇◇◇◇1835	
18 000	0,041	0,012	0,032	0,56	1.134	4280	18 x 40	ECROJYL183M◇◇◇◇1840	
<b>10</b> <b>(13)</b> <b>1A</b>	100	2,52	0,580	2,30	0,19	10	210	5 x 11,5	ECR1AYL101M◇◇◇◇0511
	220	1,15	0,220	0,870	0,19	22	340	6,3 x 11,5	ECR1AYL221M◇◇◇◇0611
	470	0,536	0,130	0,520	0,19	47	640	8 x 11,5	ECR1AYL471M◇◇◇◇0811
	680	0,371	0,087	0,350	0,19	68	840	8 x 16	ECR1AYL681M◇◇◇◇0816
		0,371	0,080	0,320	0,19	68	865	10 x 12,5	ECR1AYL681M◇◇◇◇1012
	1 000	0,252	0,069	0,270	0,19	100	1050	8 x 20	ECR1AYL102M◇◇◇◇0820
		0,252	0,060	0,240	0,19	100	1210	10 x 16	ECR1AYL102M◇◇◇◇1016
	1 200	0,210	0,460	0,180	0,19	120	1400	10 x 20	ECR1AYL122M◇◇◇◇1020
	1 500	0,168	0,042	0,170	0,19	150	1650	10 x 25	ECR1AYL152M◇◇◇◇1025
		0,168	0,049	0,160	0,19	150	1450	12,5 x 16	ECR1AYL152M◇◇◇◇1216
	2 200	0,127	0,031	0,120	0,21	220	1910	10 x 30	ECR1AYL222M◇◇◇◇1030
		0,127	0,035	0,120	0,21	220	1900	12,5 x 20	ECR1AYL222M◇◇◇◇1220
		0,127	0,042	0,120	0,21	220	1940	16 x 16	ECR1AYL222M◇◇◇◇1616
	2 700	0,103	0,043	0,110	0,21	270	2210	18 x 16	ECR1AYL272M◇◇◇◇1816
	3 300	0,092	0,027	0,089	0,23	330	2230	12,5 x 25	ECR1AYL332M◇◇◇◇1225
	3 900	0,078	0,024	0,078	0,23	390	2650	12,5 x 30	ECR1AYL392M◇◇◇◇1230
		0,078	0,027	0,078	0,23	390	2530	16 x 20	ECR1AYL392M◇◇◇◇1620
	4 700	0,071	0,020	0,065	0,25	470	2880	12,5 x 35	ECR1AYL472M◇◇◇◇1235
0,064		0,017	0,056	0,27	560	3350	12,5 x 40	ECR1AYL562M◇◇◇◇1240	
5 600	0,064	0,021	0,060	0,27	560	2930	16 x 25	ECR1AYL562M◇◇◇◇1625	
	0,064	0,026	0,067	0,27	560	2860	18 x 20	ECR1AYL562M◇◇◇◇1820	
	0,057	0,017	0,050	0,29	680	3450	16 x 31,5	ECR1AYL682M◇◇◇◇1631	
6 800	0,057	0,019	0,049	0,29	680	3140	18 x 25	ECR1AYL682M◇◇◇◇1825	
	0,053	0,015	0,044	0,33	820	3610	16 x 35,5	ECR1AYL822M◇◇◇◇1635	
8 200	0,053	0,015	0,040	0,33	820	4170	18 x 31,5	ECR1AYL822M◇◇◇◇1831	
	0,049	0,013	0,038	0,37	1.000	4080	16 x 40	ECR1AYL103M◇◇◇◇1640	
10 000	0,049	0,014	0,038	0,37	1.000	4220	18 x 35,5	ECR1AYL103M◇◇◇◇1835	
	0,045	0,012	0,032	0,41	1.200	4280	18 x 40	ECR1AYL123M◇◇◇◇1840	
<b>16</b> <b>(20)</b> <b>1C</b>	56	3,79	0,580	2,30	0,16	9	210	5 x 11,5	ECR1CYL560M◇◇◇◇0511
	120	1,77	0,220	0,870	0,16	20	340	6,3 x 11,5	ECR1CYL121M◇◇◇◇0611
	330	0,643	0,130	0,520	0,16	53	640	8 x 11,5	ECR1CYL331M◇◇◇◇0811
	470	0,452	0,087	0,350	0,16	76	840	8 x 16	ECR1CYL471M◇◇◇◇0816
		0,452	0,080	0,320	0,16	76	865	10 x 12,5	ECR1CYL471M◇◇◇◇1012
	680	0,312	0,069	0,270	0,16	109	1050	8 x 20	ECR1CYL681M◇◇◇◇0820
0,312		0,060	0,240	0,16	109	1210	10 x 16	ECR1CYL681M◇◇◇◇1016	

**RADIAL**

&gt;&gt;



RADIAL

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance	Z <sub>max</sub> Max Impedance	Z <sub>max</sub> Max Impedance	tanδ Dissipation Factor	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current	Size øD x L	ORDER CODE
		20°C 120Hz (Ω)	20°C 100kHz (Ω)	-10°C 100kHz (Ω)	20°C 120Hz	(μA)	105°C 100kHz (mArms)		
(V)	(μF)	(Ω)	(Ω)	(Ω)		(μA)	(mArms)	(mm)	Details: Page 15
16 (20) 1C	1 000	0,212	0,046	0,180	0,16	160	1400	10 x 20	ECR1CYL102M $\diamond\diamond\Delta\Delta$ 1020
		0,212	0,049	0,160	0,16	160	1450	12,5 x 16	ECR1CYL102M $\diamond\diamond\Delta\Delta$ 1216
	1 200	0,177	0,042	0,170	0,16	192	1650	10 x 25	ECR1CYL122M $\diamond\diamond\Delta\Delta$ 1025
		0,141	0,031	0,120	0,16	240	1910	10 x 30	ECR1CYL152M $\diamond\diamond\Delta\Delta$ 1030
	1 500	0,141	0,035	0,120	0,16	240	1900	12,5 x 20	ECR1CYL152M $\diamond\diamond\Delta\Delta$ 1220
		0,141	0,042	0,120	0,16	240	1940	16 x 16	ECR1CYL152M $\diamond\diamond\Delta\Delta$ 1616
		0,109	0,027	0,089	0,18	352	2230	12,5 x 25	ECR1CYL222M $\diamond\diamond\Delta\Delta$ 1225
	2 200	0,107	0,043	0,110	0,18	352	2210	18 x 16	ECR1CYL222M $\diamond\diamond\Delta\Delta$ 1816
		0,088	0,024	0,078	0,18	432	2650	12,5 x 30	ECR1CYL272M $\diamond\diamond\Delta\Delta$ 1230
	2 700	0,088	0,027	0,078	0,18	432	2530	16 x 20	ECR1CYL272M $\diamond\diamond\Delta\Delta$ 1620
		0,080	0,020	0,065	0,20	528	2880	12,5 x 35	ECR1CYL332M $\diamond\diamond\Delta\Delta$ 1235
	3 300	0,068	0,017	0,056	0,20	624	3350	12,5 x 40	ECR1CYL392M $\diamond\diamond\Delta\Delta$ 1240
		0,068	0,021	0,060	0,20	624	2930	16 x 25	ECR1CYL392M $\diamond\diamond\Delta\Delta$ 1625
		0,068	0,026	0,037	0,20	624	2860	18 x 20	ECR1CYL392M $\diamond\diamond\Delta\Delta$ 1820
	4 700	0,062	0,017	0,050	0,22	752	3450	16 x 31,5	ECR1CYL472M $\diamond\diamond\Delta\Delta$ 1631
		0,062	0,019	0,049	0,22	752	3140	18 x 25	ECR1CYL472M $\diamond\diamond\Delta\Delta$ 1825
		0,057	0,015	0,044	0,24	896	3610	16 x 35,5	ECR1CYL562M $\diamond\diamond\Delta\Delta$ 1635
	5 600	0,057	0,015	0,040	0,24	896	4170	18 x 31,5	ECR1CYL562M $\diamond\diamond\Delta\Delta$ 1831
0,051		0,013	0,038	0,26	1088	4080	16 x 40	ECR1CYL682M $\diamond\diamond\Delta\Delta$ 1640	
8 200	0,049	0,014	0,038	0,30	1312	4220	18 x 35,5	ECR1CYL822M $\diamond\diamond\Delta\Delta$ 1835	
10 000	0,045	0,012	0,033	0,34	1600	4280	18 x 40	ECR1CYL103M $\diamond\diamond\Delta\Delta$ 1840	
25 (32) 1E	47	3,96	0,580	2,30	0,14	12	210	5 x 11,5	ECR1EYL470M $\diamond\diamond\Delta\Delta$ 0511
	100	1,86	0,220	0,870	0,14	25	340	6,3 x 11,5	ECR1EYL101M $\diamond\diamond\Delta\Delta$ 0611
	220	0,844	0,130	0,520	0,14	55	640	8 x 11,5	ECR1EYL221M $\diamond\diamond\Delta\Delta$ 0811
		0,563	0,087	0,350	0,14	83	840	8 x 16	ECR1EYL331M $\diamond\diamond\Delta\Delta$ 0816
	330	0,563	0,080	0,320	0,14	83	865	10 x 12,5	ECR1EYL331M $\diamond\diamond\Delta\Delta$ 1012
		0,395	0,069	0,270	0,14	118	1050	8 x 20	ECR1EYL471M $\diamond\diamond\Delta\Delta$ 0820
	470	0,395	0,060	0,240	0,14	118	1210	10 x 16	ECR1EYL471M $\diamond\diamond\Delta\Delta$ 1016
		0,273	0,046	0,180	0,14	170	1400	10 x 20	ECR1EYL681M $\diamond\diamond\Delta\Delta$ 1020
	680	0,273	0,049	0,160	0,14	170	1450	12,5 x 16	ECR1EYL681M $\diamond\diamond\Delta\Delta$ 1216
		0,226	0,042	0,170	0,14	205	1650	10 x 25	ECR1EYL821M $\diamond\diamond\Delta\Delta$ 1025
	1 000	0,186	0,031	0,120	0,14	250	1910	10 x 30	ECR1EYL102M $\diamond\diamond\Delta\Delta$ 1030
		0,186	0,035	0,120	0,14	250	1900	12,5 x 20	ECR1EYL102M $\diamond\diamond\Delta\Delta$ 1220
		0,186	0,042	0,120	0,14	250	1940	16 x 16	ECR1EYL102M $\diamond\diamond\Delta\Delta$ 1616
	1 200	0,155	0,043	0,110	0,14	300	2210	18 x 16	ECR1EYL122M $\diamond\diamond\Delta\Delta$ 1816
	1 500	0,124	0,027	0,089	0,14	375	2230	12,5 x 25	ECR1EYL152M $\diamond\diamond\Delta\Delta$ 1225
	1 800	0,103	0,024	0,078	0,14	450	2650	12,5 x 30	ECR1EYL182M $\diamond\diamond\Delta\Delta$ 1230
		0,103	0,027	0,078	0,14	450	2530	16 x 20	ECR1EYL182M $\diamond\diamond\Delta\Delta$ 1620
	2 200	0,096	0,020	0,065	0,16	550	2880	12,5 x 35	ECR1EYL222M $\diamond\diamond\Delta\Delta$ 1235
		0,096	0,026	0,067	0,16	550	2860	18 x 20	ECR1EYL222M $\diamond\diamond\Delta\Delta$ 1820
	2 700	0,079	0,017	0,056	0,16	675	3350	12,5 x 40	ECR1EYL272M $\diamond\diamond\Delta\Delta$ 1240
		0,079	0,021	0,060	0,16	675	2930	16 x 25	ECR1EYL272M $\diamond\diamond\Delta\Delta$ 1625
		0,072	0,017	0,050	0,18	825	3450	16 x 31,5	ECR1EYL332M $\diamond\diamond\Delta\Delta$ 1631
	3 300	0,072	0,019	0,049	0,18	825	3140	18 x 25	ECR1EYL332M $\diamond\diamond\Delta\Delta$ 1825
		0,061	0,015	0,044	0,18	975	3610	16 x 35,5	ECR1EYL392M $\diamond\diamond\Delta\Delta$ 1635
3 900	0,061	0,015	0,040	0,18	975	4170	18 x 31,5	ECR1EYL392M $\diamond\diamond\Delta\Delta$ 1831	
	0,056	0,013	0,038	0,20	1175	4080	16 x 40	ECR1EYL472M $\diamond\diamond\Delta\Delta$ 1640	
4 700	0,056	0,014	0,038	0,20	1175	4220	18 x 35,5	ECR1EYL472M $\diamond\diamond\Delta\Delta$ 1835	
	0,052	0,012	0,032	0,22	1400	4280	18 x 40	ECR1EYL562M $\diamond\diamond\Delta\Delta$ 1840	
35 (44) 1V	33	4,83	0,580	2,30	0,12	12	210	5 x 11,5	ECR1VYL330M $\diamond\diamond\Delta\Delta$ 0511
	56	2,85	0,220	0,870	0,12	20	340	6,3 x 11,5	ECR1VYL560M $\diamond\diamond\Delta\Delta$ 0611
	150	1,07	0,130	0,520	0,12	53	640	8 x 11,5	ECR1VYL151M $\diamond\diamond\Delta\Delta$ 0811
		0,723	0,087	0,350	0,12	77	840	8 x 16	ECR1VYL221M $\diamond\diamond\Delta\Delta$ 0816
	220	0,723	0,080	0,320	0,12	77	865	10 x 12,5	ECR1VYL221M $\diamond\diamond\Delta\Delta$ 1012
		0,589	0,069	0,270	0,12	95	1050	8 x 20	ECR1VYL271M $\diamond\diamond\Delta\Delta$ 0820
	330	0,482	0,060	0,240	0,12	116	1210	10 x 16	ECR1VYL331M $\diamond\diamond\Delta\Delta$ 1016
		0,339	0,046	0,180	0,12	165	1400	10 x 20	ECR1VYL471M $\diamond\diamond\Delta\Delta$ 1020
	470	0,339	0,049	0,160	0,12	165	1450	12,5 x 16	ECR1VYL471M $\diamond\diamond\Delta\Delta$ 1216
		0,284	0,042	0,170	0,12	196	1650	10 x 25	ECR1VYL561M $\diamond\diamond\Delta\Delta$ 1025
	680	0,234	0,031	0,120	0,12	238	1910	10 x 30	ECR1VYL681M $\diamond\diamond\Delta\Delta$ 1030
		0,234	0,035	0,120	0,12	238	1900	12,5 x 20	ECR1VYL681M $\diamond\diamond\Delta\Delta$ 1220
		0,234	0,042	0,120	0,12	238	1940	16 x 16	ECR1VYL681M $\diamond\diamond\Delta\Delta$ 1616
	1 000	0,159	0,027	0,089	0,12	350	2230	12,5 x 25	ECR1VYL102M $\diamond\diamond\Delta\Delta$ 1225
		0,159	0,043	0,110	0,12	350	2210	18 x 16	ECR1VYL102M $\diamond\diamond\Delta\Delta$ 1816
	1 200	0,133	0,024	0,078	0,12	420	2650	12,5 x 30	ECR1VYL122M $\diamond\diamond\Delta\Delta$ 1230
		0,133	0,027	0,078	0,12	420	2530	16 x 20	ECR1VYL122M $\diamond\diamond\Delta\Delta$ 1620






U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance  (µF)	ESR <sub>max</sub> Equivalent Series Resistance  20°C 120kHz (Ω)	Z <sub>max</sub> Max Impedance  20°C 100kHz (Ω)	Z <sub>max</sub> Max Impedance  -10°C 100kHz (Ω)	tanδ Dissipation Factor  20°C 120Hz	I <sub>leak</sub> Leakage Current  (µA)	I <sub>RAC</sub> Rated Ripple Current  105°C 100kHz (mA <sub>RMS</sub> )	Size  øD x L  (mm)	ORDER CODE
									◇◇ = pin style & length
									△△ = pitch code
Details: Page 15									
<b>35</b> (44) 1V	1 500	0,106	0,020	0,065	0,12	525	2880	12,5 x 35	ECR1VYL152M◇◇△△1235
		0,088	0,017	0,056	0,12	630	3350	12,5 x 40	ECR1VYL182M◇◇△△1240
	1 800	0,088	0,024	0,060	0,12	630	2930	16 x 25	ECR1VYL182M◇◇△△1625
		0,088	0,026	0,067	0,12	630	2860	18 x 20	ECR1VYL182M◇◇△△1820
	2 200	0,084	0,017	0,050	0,14	770	3450	16 x 31,5	ECR1VYL222M◇◇△△1631
		0,084	0,019	0,049	0,14	770	3140	18 x 25	ECR1VYL222M◇◇△△1825
	2 700	0,069	0,015	0,044	0,14	945	3610	16 x 35,5	ECR1VYL272M◇◇△△1635
		0,069	0,015	0,040	0,14	945	4170	18 x 31,5	ECR1VYL272M◇◇△△1831
	3 300	0,064	0,013	0,038	0,16	1.155	4080	16 x 40	ECR1VYL332M◇◇△△1640
		0,064	0,014	0,038	0,16	1.155	4220	18 x 35,5	ECR1VYL332M◇◇△△1835
	3 900	0,054	0,012	0,032	0,16	1.365	4280	18 x 40	ECR1VYL392M◇◇△△1840
	<b>50</b> (63) 1H	22	6,03	0,700	2,80	0,10	11	180	5 x 11,5
56		2,37	0,300	1,20	0,10	28	295	6,3 x 11,5	ECR1HYL560M◇◇△△0611
100		1,33	0,170	0,680	0,10	50	555	8 x 11,5	ECR1HYL101M◇◇△△0811
120		1,11	0,120	0,480	0,10	60	730	8 x 16	ECR1HYL121M◇◇△△0816
150		0,884	0,120	0,480	0,10	75	760	10 x 12,5	ECR1HYL151M◇◇△△1012
180		0,737	0,091	0,360	0,10	90	910	8 x 20	ECR1HYL181M◇◇△△0820
220		0,603	0,084	0,340	0,10	110	1050	10 x 16	ECR1HYL221M◇◇△△016E
270		0,491	0,060	0,240	0,10	135	1220	10 x 20	ECR1HYL271M◇◇△△1020
		0,491	0,061	0,200	0,10	135	1260	12,5 x 16	ECR1HYL271M◇◇△△1216
330		0,402	0,055	0,220	0,10	165	1440	10 x 25	ECR1HYL331M◇◇△△1025
		0,282	0,043	0,170	0,10	235	1690	10 x 30	ECR1HYL471M◇◇△△1030
470		0,282	0,045	0,150	0,10	235	1660	12,5 x 20	ECR1HYL471M◇◇△△1220
		0,282	0,055	0,170	0,10	235	1690	16 x 16	ECR1HYL471M◇◇△△1616
560		0,237	0,034	0,110	0,10	280	1950	12,5 x 25	ECR1HYL561M◇◇△△1225
		0,237	0,054	0,150	0,10	280	1930	18 x 16	ECR1HYL561M◇◇△△1816
680		0,195	0,030	0,100	0,10	340	2310	12,5 x 30	ECR1HYL681M◇◇△△1230
820		0,162	0,025	0,083	0,10	410	2510	12,5 x 35	ECR1HYL821M◇◇△△1235
		0,162	0,034	0,100	0,10	410	2210	16 x 20	ECR1HYL821M◇◇△△1620
1 000		0,133	0,021	0,069	0,10	500	2920	12,5 x 40	ECR1HYL102M◇◇△△1240
		0,133	0,025	0,075	0,10	500	2555	16 x 25	ECR1HYL102M◇◇△△1625
		0,133	0,036	0,097	0,10	500	2490	18 x 20	ECR1HYL102M◇◇△△1820
1 200		0,111	0,022	0,066	0,10	600	3010	16 x 31,5	ECR1HYL122M◇◇△△1631
		0,111	0,026	0,070	0,10	600	2740	18 x 25	ECR1HYL122M◇◇△△1825
1 500		0,088	0,019	0,057	0,10	750	3150	16 x 35,5	ECR1HYL152M◇◇△△1635
1 800		0,074	0,016	0,048	0,10	900	3710	16 x 40	ECR1HYL182M◇◇△△1640
		0,074	0,021	0,057	0,10	900	3635	18 x 31,5	ECR1HYL182M◇◇△△1831
2 200		0,072	0,017	0,046	0,12	1.100	3680	18 x 35,5	ECR1HYL222M◇◇△△1835
2 700		0,059	0,014	0,038	0,12	1.350	3880	18 x 40	ECR1HYL272M◇◇△△1840
3 300		0,056	0,014	0,038	0,14	1.650	3800	18 x 40	ECR1HYL332M◇◇△△1840
<b>63</b> (79) 1J		15	7,96	1,80	7,30	0,09	10	61	5 x 11,5
	33	3,62	1,00	4,10	0,09	21	126	6,3 x 11,5	ECR1JYL330M◇◇△△0611
	56	2,14	0,500	2,20	0,09	36	260	8 x 11,5	ECR1JYL560M◇◇△△0811
	82	1,46	0,360	1,70	0,09	52	335	8 x 16	ECR1JYL820M◇◇△△0816
		1,46	0,340	1,40	0,09	52	325	10 x 12,5	ECR1JYL820M◇◇△△1012
	120	0,995	0,260	1,30	0,09	76	408	8 x 20	ECR1JYL121M◇◇△△0820
		0,995	0,250	1,20	0,09	76	400	10 x 16	ECR1JYL121M◇◇△△1016
	180	0,663	0,170	0,760	0,09	114	518	10 x 20	ECR1JYL181M◇◇△△1020
		0,663	0,180	0,860	0,09	114	527	12,5 x 16	ECR1JYL181M◇◇△△1216
	220	0,543	0,160	0,670	0,09	139	595	10 x 25	ECR1JYL221M◇◇△△1025
	270	0,442	0,120	0,570	0,09	171	740	10 x 30	ECR1JYL271M◇◇△△1030
		0,442	0,130	0,520	0,09	171	765	12,5 x 20	ECR1JYL271M◇◇△△1220
		0,442	0,110	0,520	0,09	171	895	16 x 16	ECR1JYL271M◇◇△△1616
	330	0,362	0,096	0,360	0,09	208	875	12,5 x 25	ECR1JYL331M◇◇△△1225
	390	0,306	0,096	0,400	0,09	246	1030	18 x 16	ECR1JYL391M◇◇△△1816
	470	0,254	0,080	0,340	0,09	297	1010	12,5 x 30	ECR1JYL471M◇◇△△1230
		0,254	0,077	0,320	0,09	297	1130	16 x 20	ECR1JYL471M◇◇△△1620
	560	0,213	0,070	0,300	0,09	353	1140	12,5 x 35	ECR1JYL561M◇◇△△1235
	680	0,176	0,060	0,250	0,09	429	1280	12,5 x 40	ECR1JYL681M◇◇△△1240
		0,176	0,062	0,230	0,09	429	1350	16 x 25	ECR1JYL681M◇◇△△1625
		0,176	0,072	0,270	0,09	429	1300	18 x 20	ECR1JYL681M◇◇△△1820
	820	0,146	0,049	0,180	0,09	517	1650	16 x 31,5	ECR1JYL821M◇◇△△1631
		0,146	0,052	0,190	0,09	517	1560	18 x 25	ECR1JYL821M◇◇△△1825
	1 000	0,119	0,040	0,150	0,09	630	1900	16 x 35,5	ECR1JYL102M◇◇△△1635
		0,119	0,042	0,150	0,09	630	1720	18 x 31,5	ECR1JYL102M◇◇△△1831

**RADIAL**


U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance	Z <sub>max</sub> Max Impedance	Z <sub>max</sub> Max Impedance	tanδ Dissipation Factor	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current	Size øD x L	ORDER CODE
(V)	(µF)	20°C 120Hz (Ω)	20°C 100kHz (Ω)	-10°C 100kHz (Ω)	20°C 120Hz	(µA)	105°C 100kHz (mA <sub>RMS</sub> )	(mm)	◇◇ = pin style & length △△ = pitch code Details: Page 15
63 (79) 1J	1 200	0,099	0,036	0,130	0,09	756	2130	16 x 40	ECR1JYL122M◇◇△△1640
		0,099	0,036	0,130	0,09	756	1890	18 x 35,5	ECR1JYL122M◇◇△△1835
	1 500	0,080	0,032	0,120	0,09	945	2470	18 x 40	ECR1JYL152M◇◇△△1840
100 (125) 2A	6,8	15,6	1,80	7,30	0,08	7	62	5 x 11,5	ECR2AYL6R8M◇◇△△0511
	15	7,08	1,00	4,10	0,08	15	126	6,3 x 11,5	ECR2AYL150M◇◇△△0611
	27	3,93	0,500	2,20	0,08	27	260	8 x 11,5	ECR2AYL270M◇◇△△0811
	39	2,73	0,360	1,70	0,08	39	335	8 x 16	ECR2AYL390M◇◇△△0816
	47	2,26	0,340	1,40	0,08	47	325	10 x 12,5	ECR2AYL470M◇◇△△1012
	56	1,90	0,260	1,30	0,08	56	408	8 x 20	ECR2AYL560M◇◇△△0820
	68	1,56	0,250	1,20	0,08	68	400	10 x 16	ECR2AYL680M◇◇△△1016
	82	1,30	0,170	0,760	0,08	82	518	10 x 20	ECR2AYL820M◇◇△△1020
		1,30	0,180	0,860	0,08	82	527	12,5 x 16	ECR2AYL820M◇◇△△1216
	100	1,07	0,160	0,670	0,08	100	595	10 x 25	ECR2AYL101M◇◇△△1025
	120	0,884	0,120	0,570	0,08	120	740	10 x 30	ECR2AYL121M◇◇△△1030
		0,884	0,130	0,520	0,08	120	765	12,5 x 20	ECR2AYL121M◇◇△△1220
	150	0,707	0,110	0,520	0,08	150	895	16 x 16	ECR2AYL151M◇◇△△1616
	180	0,589	0,096	0,360	0,08	180	875	12,5 x 25	ECR2AYL181M◇◇△△1225
		0,589	0,096	0,400	0,08	180	1030	18 x 16	ECR2AYL181M◇◇△△1816
	220	0,482	0,080	0,340	0,08	220	1010	12,5 x 30	ECR2AYL221M◇◇△△1230
		0,482	0,077	0,320	0,08	220	1130	16 x 20	ECR2AYL221M◇◇△△1620
	270	0,393	0,070	0,300	0,08	270	1140	12,5 x 35	ECR2AYL271M◇◇△△1235
		0,393	0,062	0,230	0,08	270	1350	16 x 25	ECR2AYL271M◇◇△△1625
	330	0,322	0,060	0,250	0,08	330	1280	12,5 x 40	ECR2AYL331M◇◇△△1240
		0,322	0,072	0,270	0,08	330	1300	18 x 20	ECR2AYL331M◇◇△△1820
390	0,272	0,049	0,180	0,08	390	1650	16 x 31,5	ECR2AYL391M◇◇△△1631	
	0,272	0,052	0,190	0,08	390	1560	18 x 25	ECR2AYL391M◇◇△△1825	
470	0,226	0,040	0,150	0,08	470	1900	16 x 35,5	ECR2AYL471M◇◇△△1635	
	0,226	0,042	0,150	0,08	470	1720	18 x 31,5	ECR2AYL471M◇◇△△1831	
560	0,189	0,036	0,130	0,08	560	2130	16 x 40	ECR2AYL561M◇◇△△1640	
680	0,156	0,036	0,130	0,08	680	1890	18 x 35,5	ECR2AYL681M◇◇△△1835	
820	0,129	0,032	0,120	0,08	820	2470	18 x 40	ECR2AYL821M◇◇△△1840	

RADIAL



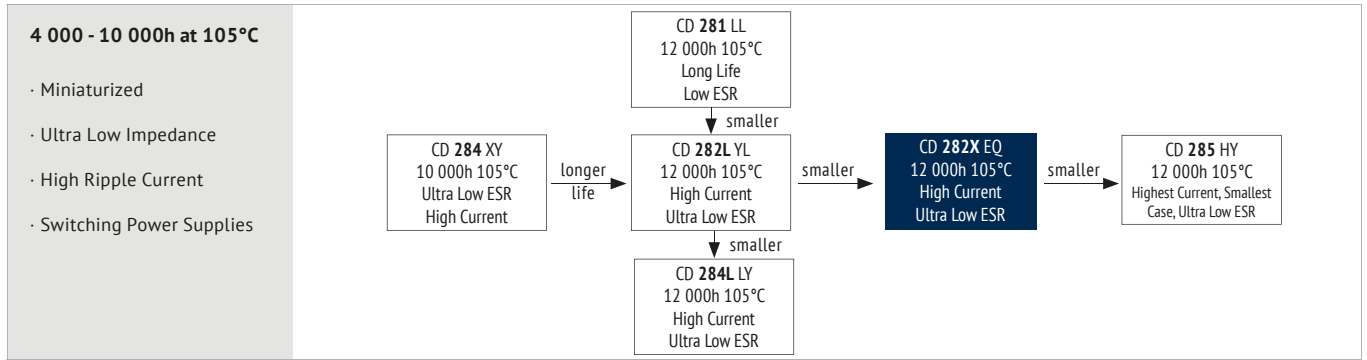

## ITEM CHARACTERISTICS

Operating Temperature Range (°C)	-40 ~ +105
Voltage Range (V)	6,3 ~ 100
Capacitance Range (µF)	1 ~ 15 000
Capacitance Tolerance (20°C, 120Hz)	± 20%

**!** The usage at lower temperatures than indicated may be possible. Please contact the Jianghai Europe sales office for approval.

Leakage Current (µA) After 2 minutes at 20°C application of rated voltage, leakage current is not more than specified in table.

Stability at Low Temperature (Impedance Ratio at 120Hz)	Rated Voltage (V)	6,3	10	16	25	35	50	63	100
	Z <sub>-25°C</sub> / Z <sub>+20°C</sub>		4	3			2		
Z <sub>-40°C</sub> / Z <sub>+20°C</sub>		8	6	4			3		

## ITEM USEFUL LIFE LOAD LIFE ENDURANCE TEST SHELF LIFE


ITEM	USEFUL LIFE		LOAD LIFE	ENDURANCE TEST		SHELF LIFE		
	6,3~10V:	16~100V:		6,3~10V:	16~100V:			
Lifetime	Ø 5: 6 000h Ø 6,3-8: 8 000h Ø 10-18: 10 000h	7 000h 9 000h 12 000h	> 250 000h	4 000h 6 000h 8 000h	5 000h 7 000h 10 000h	6 000h 8 000h 10 000h	7 000h 9 000h 12 000h	1 000h
Leakage Current	Not more than specified value		Not more than specified value	Not more than specified value		Not more than specified value		
Capacitance Change	Within ± 40% of initial value		Within ± 25% of initial value	Within ± 25% of initial value		Within ± 20% of initial value		
Dissipation Factor	Not more than 300% of specified value		Not more than 200% of specified value	Not more than 200% of specified value		Not more than 200% of specified value		
Condition:								
Applied Voltage	$U_R$		$U_R$	$U_R$		$U_R = 0$		
Applied Current	$I_R$		$1,4 \times I_R$	$I_R = 0$		$I_R = 0$		
Applied Temperature	105°C		105°C	105°C		105°C		
				IEC 60384		After test: $U_R$ to be applied for 30 min > 24h before measurement		

## MULTIPLIER FOR RIPPLE CURRENT (FREQUENCY COEFFICIENT)

Capacitance (µF)	Frequency			
	120Hz	1kHz	10kHz	100kHz
1	0,35	0,60	0,80	1,00
2,2 ~ 10	0,42	0,60	0,80	1,00
22 ~ 47	0,55	0,75	0,90	1,00
100 ~ 330	0,70	0,85	0,95	1,00
470 ~ 1 000	0,75	0,90	0,98	1,00
2 200 ~ 15 000	0,80	0,95	1,00	1,00

Multipliers for typical operating conditions.

## MULTIPLIER FOR LIFETIME (LIFETIME DIAGRAM)

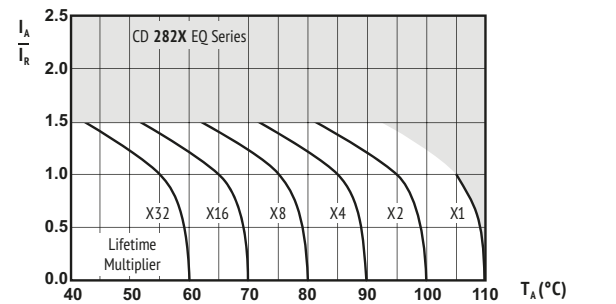

$I_A$  = actual ripple current at 100kHz,  
 $I_R$  = rated ripple current at 100kHz, 105°C  
 Multiplier of Useful Life as a function of ambient temperature & ripple current load

## ENVIRONMENTAL

The products are RoHS, WEEE and RECh compliant. The detailed version please see separate "Environmental Certificates" document or [www.jianghai-europe.com](http://www.jianghai-europe.com)

## ! SAFETY FACTOR

This diagram includes a safety margin. In many cases the allowed current capability/lifetime may be increased. For details and approvals please contact the Jianghai Europe sales office.


RADIAL

RADIAL

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance	Z <sub>max</sub> Max Impedance		tanδ Dissipation Factor	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current	Size øD x L	ORDER CODE
			20°C 120Hz	20°C 100kHz					
(V)	(µF)	(Ω)	(Ω)	(Ω)		(µA)	(mA <sub>RMS</sub> )	(mm)	Details: Page 15
6,3 (7,2) 0J	100	2,92	0,900	3,60	0,22	7	150	5 x 11,5	ECR0JEQ101M◇◇△△0511
	220	1,33	0,400	1,20	0,22	14	250	5 x 11,5	ECR0JEQ221M◇◇△△0511
	330	0,884	0,220	0,870	0,22	21	340	6,3 x 11,5	ECR0JEQ331M◇◇△△0611
	470	0,621	0,220	0,870	0,22	30	400	6,3 x 11,5	ECR0JEQ471M◇◇△△0611
	1 000	0,292	0,130	0,520	0,22	63	640	8 x 11,5	ECR0JEQ102M◇◇△△0811
	2 200	0,145	0,062	0,250	0,24	139	1300	10 x 16	ECR0JEQ222M◇◇△△1016
	3 300	0,104	0,046	0,180	0,26	208	1400	10 x 20	ECR0JEQ332M◇◇△△1020
	4 700	0,079	0,032	0,110	0,28	297	2230	12,5 x 25	ECR0JEQ472M◇◇△△1225
	6 800	0,062	0,032	0,110	0,32	429	2230	12,5 x 25	ECR0JEQ682M◇◇△△1225
	10 000	0,053	0,021	0,060	0,40	630	2930	16 x 25	ECR0JEQ103M◇◇△△1625
15 000	0,044	0,015	0,044	0,50	945	3610	16 x 35,5	ECR0JEQ153M◇◇△△1635	
10 (13) 1A	100	2,52	0,900	3,60	0,19	10	150	5 x 11,5	ECR1AEQ101M◇◇△△0511
	220	1,15	0,400	1,20	0,19	22	250	5 x 11,5	ECR1AEQ221M◇◇△△0511
	330	0,764	0,220	0,870	0,19	33	400	6,3 x 11,5	ECR1AEQ331M◇◇△△0611
	470	0,536	0,220	0,870	0,19	47	400	6,3 x 11,5	ECR1AEQ471M◇◇△△0611
	1 000	0,252	0,080	0,320	0,19	100	865	10 x 12,5	ECR1AEQ102M◇◇△△1012
	2 200	0,127	0,046	0,180	0,21	220	1400	10 x 20	ECR1AEQ222M◇◇△△1020
	3 300	0,092	0,041	0,140	0,23	330	1900	12,5 x 20	ECR1AEQ332M◇◇△△1220
	4 700	0,071	0,032	0,110	0,25	470	2230	12,5 x 25	ECR1AEQ472M◇◇△△1225
	6 800	0,057	0,021	0,060	0,29	680	2930	16 x 25	ECR1AEQ682M◇◇△△1625
	10 000	0,049	0,019	0,056	0,37	1000	3450	16 x 31,5	ECR1AEQ103M◇◇△△1631
16 (20) 1C	47	4,52	0,400	1,20	0,16	8	250	5 x 11,5	ECR1CEQ470M◇◇△△0511
	100	2,13	0,400	1,20	0,16	16	250	5 x 11,5	ECR1CEQ101M◇◇△△0511
	220	0,965	0,220	0,870	0,16	36	400	6,3 x 11,5	ECR1CEQ221M◇◇△△0611
	330	0,643	0,220	0,870	0,16	53	400	6,3 x 11,5	ECR1CEQ331M◇◇△△0611
	470	0,452	0,130	0,520	0,16	76	640	8 x 11,5	ECR1CEQ471M◇◇△△0811
	1 000	0,212	0,062	0,250	0,16	160	1210	10 x 16	ECR1CEQ102M◇◇△△1016
	2 200	0,109	0,041	0,140	0,18	352	1900	12,5 x 20	ECR1CEQ222M◇◇△△1220
	3 300	0,080	0,032	0,110	0,20	528	2230	12,5 x 25	ECR1CEQ332M◇◇△△1225
	4 700	0,062	0,021	0,060	0,22	752	2930	16 x 25	ECR1CEQ472M◇◇△△1625
	6 800	0,051	0,019	0,056	0,26	1088	3450	16 x 31,5	ECR1CEQ682M◇◇△△1631
25 (32) 1E	33	5,63	0,400	1,20	0,14	9	250	5 x 11,5	ECR1EEQ330M◇◇△△0511
	47	3,96	0,400	1,20	0,14	12	250	5 x 11,5	ECR1EEQ470M◇◇△△0511
	100	1,86	0,400	1,20	0,14	25	250	5 x 11,5	ECR1EEQ101M◇◇△△0511
	220	0,844	0,220	0,870	0,14	55	400	6,3 x 11,5	ECR1EEQ221M◇◇△△0611
	330	0,563	0,130	0,520	0,14	83	640	8 x 11,5	ECR1EEQ331M◇◇△△0811
	470	0,395	0,080	0,320	0,14	118	865	10 x 12,5	ECR1EEQ471M◇◇△△1012
	1 000	0,186	0,046	0,180	0,14	250	1400	10 x 20	ECR1EEQ102M◇◇△△1020
	2 200	0,096	0,032	0,110	0,16	550	2230	12,5 x 25	ECR1EEQ222M◇◇△△1225
	3 300	0,072	0,021	0,060	0,18	825	2930	16 x 25	ECR1EEQ332M◇◇△△1625
	4 700	0,056	0,019	0,056	0,20	1175	3450	16 x 31,5	ECR1EEQ472M◇◇△△1631
35 (44) 1V	33	4,83	0,400	1,20	0,12	12	250	5 x 11,5	ECR1VEQ330M◇◇△△0511
	47	3,39	0,400	1,20	0,12	17	250	5 x 11,5	ECR1VEQ470M◇◇△△0511
	100	1,60	0,220	0,870	0,12	35	400	6,3 x 11,5	ECR1VEQ101M◇◇△△0611
	220	0,723	0,130	0,520	0,12	77	640	8 x 11,5	ECR1VEQ221M◇◇△△0811
	330	0,482	0,080	0,320	0,12	116	865	10 x 12,5	ECR1VEQ331M◇◇△△1012
	470	0,339	0,062	0,250	0,12	165	1210	10 x 16	ECR1VEQ471M◇◇△△1016
	1 000	0,159	0,041	0,140	0,12	350	1900	12,5 x 20	ECR1VEQ102M◇◇△△1220
	2 200	0,084	0,021	0,060	0,14	770	2930	16 x 25	ECR1VEQ222M◇◇△△1625
	3 300	0,064	0,019	0,056	0,16	1155	3450	16 x 31,5	ECR1VEQ332M◇◇△△1631
	50 (63) 1H	1,0	132	4,00	8,00	0,10	3	30	5 x 11,5
2,2		60,3	2,50	6,00	0,10	3	43	5 x 11,5	ECR1HEQ2R2M◇◇△△0511
3,3		40,2	2,20	5,60	0,10	3	53	5 x 11,5	ECR1HEQ3R3M◇◇△△0511
4,7		28,3	1,90	5,00	0,10	3	88	5 x 11,5	ECR1HEQ4R7M◇◇△△0511
10		13,3	1,50	4,00	0,10	5	100	5 x 11,5	ECR1HEQ100M◇◇△△0511
22		6,03	0,700	2,80	0,10	11	180	5 x 11,5	ECR1HEQ220M◇◇△△0511
33		4,02	0,700	2,80	0,10	17	250	5 x 11,5	ECR1HEQ330M◇◇△△0511
44		3,02	0,300	1,20	0,10	22	295	6,3 x 11,5	ECR1HEQ470M◇◇△△0611
100		1,33	0,170	0,680	0,10	50	555	8 x 11,5	ECR1HEQ101M◇◇△△0811
220		0,603	0,084	0,340	0,10	110	1050	10 x 16	ECR1HEQ221M◇◇△△1016

$U_{RDC}$ (Surge Voltage) Code	$C_R$ Rated Capacitance	$ESR_{max}$ Equivalent Series Resistance	$Z_{max}$ Max Impedance	$Z_{max}$ Max Impedance	$\tan\delta$ Dissipation Factor	$I_{leak}$ Leakage Current	$I_{RAC}$ Rated Ripple Current	Size $\varnothing D \times L$	ORDER CODE  ◇◇ = pin style & length △△ = pitch code  Details: Page 15
(V)	( $\mu F$ )	20°C 120Hz ( $\Omega$ )	20°C 100kHz ( $\Omega$ )	-10°C 100kHz ( $\Omega$ )	20°C 120Hz	( $\mu A$ )	105°C 100kHz (mA <sub>RMS</sub> )	(mm)	
<b>50</b> (63) 1H	330	0,402	0,060	0,240	0,10	165	1220	10 x 20	ECR1HEQ331M◇◇△△1020
	470	0,282	0,045	0,150	0,10	235	1660	12,5 x 20	ECR1HEQ471M◇◇△△1220
	1 000	0,133	0,032	0,096	0,10	500	2730	16 x 25	ECR1HEQ102M◇◇△△1625
	2 200	0,072	0,019	0,057	0,12	1100	3150	16 x 35,5	ECR1HEQ222M◇◇△△1635
<b>63</b> (79) 1J	10	12,0	0,880	3,50	0,09	7	173	5 x 11,5	ECR1JEQ100M◇◇△△0511
	22	5,43	0,880	3,50	0,09	14	173	5 x 11,5	ECR1JEQ220M◇◇△△0511
	33	3,62	0,350	1,40	0,09	21	278	6,3 x 11,5	ECR1JEQ330M◇◇△△0611
	47	2,54	0,350	1,40	0,09	30	278	6,3 x 11,5	ECR1JEQ470M◇◇△△0611
	100	1,20	0,150	0,600	0,09	63	725	10 x 12,5	ECR1JEQ101M◇◇△△1012
	220	0,543	0,078	0,310	0,09	139	1200	10 x 20	ECR1JEQ221M◇◇△△1020
	330	0,362	0,060	0,190	0,09	208	1570	12,5 x 20	ECR1JEQ331M◇◇△△1220
	470	0,254	0,043	0,140	0,09	297	1990	12,5 x 25	ECR1JEQ471M◇◇△△1225
	1 000	0,119	0,032	0,096	0,09	630	2730	16 x 25	ECR1JEQ102M◇◇△△1625
	<b>100</b> (125) 2A	1,0	106	4,50	15,0	0,08	3	20	5 x 11,5
2,2		48,3	3,00	13,0	0,08	3	30	5 x 11,5	ECR2AEQ2R2M◇◇△△0511
3,3		32,2	2,70	11,0	0,08	4	40	5 x 11,5	ECR2AEQ3R3M◇◇△△0511
4,7		22,6	2,50	10,0	0,08	5	65	5 x 11,5	ECR2AEQ4R7M◇◇△△0511
10		10,7	0,570	2,30	0,08	10	267	6,3 x 11,5	ECR2AEQ100M◇◇△△0611
22		4,83	0,570	2,30	0,08	22	267	6,3 x 11,5	ECR2AEQ220M◇◇△△0611
33		3,22	0,360	1,40	0,08	33	462	8 x 11,5	ECR2AEQ330M◇◇△△0811
47		2,26	0,250	1,00	0,08	47	585	8 x 16	ECR2AEQ470M◇◇△△0816
100		1,07	0,120	0,520	0,08	100	1040	10 x 20	ECR2AEQ101M◇◇△△1020
220		0,482	0,060	0,230	0,08	220	1620	12,5 x 25	ECR2AEQ221M◇◇△△1225
330		0,322	0,044	0,160	0,08	330	2210	16 x 25	ECR2AEQ331M◇◇△△1625

**RADIAL**

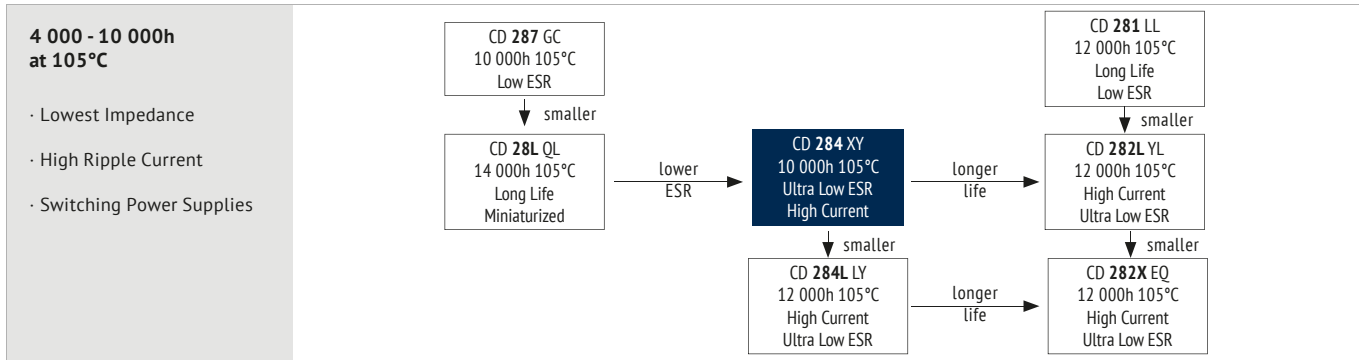

ITEM CHARACTERISTICS

Operating Temperature Range (°C)	-40 ~ +105
Voltage Range (V)	6,3 ~ 100
Capacitance Range (µF)	6,8 ~ 6 800
Capacitance Tolerance (20°C, 120Hz)	± 20%

**The usage at lower temperatures than indicated may be possible. Please contact the Jianghai Europe sales office for approval.**

Leakage Current (µA) After 2 minutes at 20°C application of rated voltage, leakage current is not more than specified in table.

Stability at Low Temperature (Impedance Ratio at 120Hz)	Rated Voltage (V)	6,3	10	16	25	35	50	63	100
Z <sub>-25°C</sub> / Z <sub>+20°C</sub>		4	3				2		
Z <sub>-40°C</sub> / Z <sub>+20°C</sub>		12	10	8	6	4			3

ITEM USEFUL LIFE LOAD LIFE ENDURANCE TEST SHELF LIFE


Lifetime	$\emptyset \leq 6,3$ : 4 000h $\emptyset 8$ : 6 000h $\emptyset 10$ : 8 000h $\emptyset \geq 12,5$ : 10 000h	$\emptyset \geq 8$ : > 250 000h	$\emptyset \leq 6,3$ : 2 000h $\emptyset 8$ : 3 000h $\emptyset 10$ : 4 000h $\emptyset \geq 12,5$ : 5 000h	$\emptyset \leq 6,3$ : 2 500h $\emptyset 8$ : 3 500h $\emptyset 10$ : 5 000h $\emptyset \geq 12,5$ : 6 000h	1000h
Leakage Current	Not more than specified value		Not more than specified value	Not more than specified value	Not more than specified value
Capacitance Change	Within ± 50% of initial value		Within ± 25% of initial value	Within ± 25% of initial value	Within ± 20% of initial value
Dissipation Factor	Not more than 300% of specified value		Not more than 200% of specified value	Not more than 200% of specified value	Not more than 200% of specified value
Condition:					
Applied Voltage	$U_R$	$U_R$	$U_R$	$U_R$	$U_R = 0$
Applied Current	$I_R$	$1,4 \times I_R$	$I_R$	$I_R = 0$	$I_R = 0$
Applied Temperature	105°C	40°C	105°C	105°C	105°C
				IEC 60384	After test: $U_R$ to be applied for 30 min > 24h before measurement

MULTIPLIER FOR RIPPLE CURRENT (FREQUENCY COEFFICIENT)

Capacitance (µF)	Frequency			
	120Hz	1kHz	10kHz	100kHz
6,8 ~ 33	0,42	0,70	0,90	1,00
39 ~ 270	0,50	0,73	0,92	1,00
330 ~ 680	0,55	0,88	0,98	1,00
820 ~ 1 800	0,66	0,90	0,99	1,00
2 200 ~ 16 800	0,70	0,92	1,00	1,00

Multipliers for typical operating conditions.

MULTIPLIER FOR LIFETIME (LIFETIME DIAGRAM)

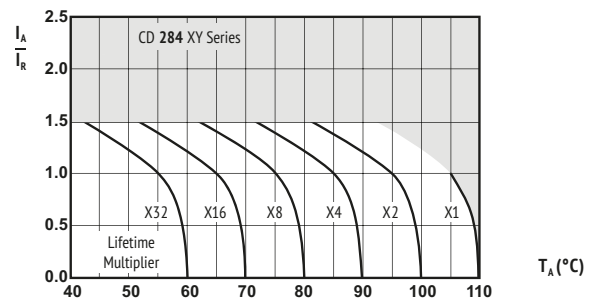

$I_A$  = actual ripple current at 100kHz,  
 $I_R$  = rated ripple current at 100kHz, 105°C  
 Multiplier of Useful Life as a function of ambient temperature & ripple current load

ENVIRONMENTAL

The products are RoHS, WEEE and REACH compliant. The detailed version please see separate "Environmental Certificates" document or [www.jianghai-europe.com](http://www.jianghai-europe.com)

SAFETY FACTOR

This diagram includes a safety margin. In many cases the allowed current capability/lifetime may be increased. For details and approvals please contact the Jianghai Europe sales office.



U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance	Z <sub>max</sub> Max Impedance		tanδ Dissipation Factor	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current	Size øD x L	ORDER CODE
			20°C 120kHz	20°C 100kHz					
(V)	(µF)	(Ω)	(Ω)	(Ω)		(µA)	(mArms)	(mm)	Details: Page 15
6,3 (7,2) 0J	150	1,95	0,300	1,00	0,22	10	250	5 x 11,5	ECR0JXY151M◇◇△△0511
	330	0,885	0,130	0,410	0,22	21	405	6,3 x 11,5	ECR0JXY331M◇◇△△0611
	560	0,522	0,072	0,220	0,22	36	760	8 x 11,5	ECR0JXY561M◇◇△△0811
	820	0,356	0,056	0,170	0,22	52	995	8 x 16	ECR0JXY821M◇◇△△0816
	1 000	0,292	0,053	0,160	0,22	63	1030	10 x 12,5	ECR0JXY102M◇◇△△1012
		0,244	0,041	0,130	0,22	76	1250	8 x 20	ECR0JXY122M◇◇△△0820
	1 200	0,244	0,038	0,120	0,22	76	1430	10 x 16	ECR0JXY122M◇◇△△1016
		0,195	0,023	0,069	0,22	95	1820	10 x 20	ECR0JXY152M◇◇△△1020
	2 200	0,145	0,022	0,066	0,24	139	2150	10 x 25	ECR0JXY222M◇◇△△1025
	3 300	0,105	0,021	0,053	0,26	208	2360	12,5 x 20	ECR0JXY332M◇◇△△1220
	3 900	0,089	0,018	0,045	0,26	246	2770	12,5 x 25	ECR0JXY392M◇◇△△1225
	4 700	0,080	0,016	0,041	0,28	297	3290	12,5 x 30	ECR0JXY472M◇◇△△1230
		0,072	0,015	0,039	0,30	353	3400	12,5 x 35	ECR0JXY562M◇◇△△1235
	5 600	0,072	0,018	0,045	0,30	353	3140	16 x 20	ECR0JXY562M◇◇△△1620
		0,063	0,016	0,043	0,32	429	3460	16 x 25	ECR0JXY682M◇◇△△1625
10 (13) 1A	100	2,52	0,300	1,00	0,19	10	250	5 x 11,5	ECR1AXY101M◇◇△△0511
	220	1,15	0,130	0,410	0,19	22	405	6,3 x 11,5	ECR1AXY221M◇◇△△0611
	470	0,537	0,072	0,220	0,19	47	760	8 x 11,5	ECR1AXY471M◇◇△△0811
	680	0,371	0,056	0,170	0,19	68	995	8 x 16	ECR1AXY681M◇◇△△0816
		0,371	0,053	0,160	0,19	68	1030	10 x 12,5	ECR1AXY681M◇◇△△1012
	1 000	0,252	0,041	0,130	0,19	100	1250	8 x 20	ECR1AXY102M◇◇△△0820
		0,252	0,038	0,120	0,19	100	1430	10 x 16	ECR1AXY102M◇◇△△1016
	1 200	0,210	0,023	0,069	0,19	120	1820	10 x 20	ECR1AXY122M◇◇△△1020
	1 500	0,168	0,022	0,066	0,19	150	2150	10 x 25	ECR1AXY152M◇◇△△1025
	2 200	0,127	0,021	0,053	0,21	220	2360	12,5 x 20	ECR1AXY222M◇◇△△1220
	3 300	0,093	0,018	0,045	0,23	330	2770	12,5 x 25	ECR1AXY332M◇◇△△1225
	3 900	0,079	0,016	0,041	0,23	390	3290	12,5 x 30	ECR1AXY392M◇◇△△1230
		0,079	0,018	0,045	0,23	390	3140	16 x 20	ECR1AXY392M◇◇△△1620
	4 700	0,071	0,015	0,039	0,25	470	3400	12,5 x 35	ECR1AXY472M◇◇△△1235
	5 600	0,064	0,016	0,043	0,27	560	3460	16 x 25	ECR1AXY562M◇◇△△1625
16 (20) 1C	56	3,79	0,300	1,00	0,16	9	250	5 x 11,5	ECR1CXY560M◇◇△△0511
	120	1,77	0,130	0,410	0,16	20	405	6,3 x 11,5	ECR1CXY121M◇◇△△0611
	330	0,644	0,072	0,220	0,16	53	760	8 x 11,5	ECR1CXY331M◇◇△△0811
	470	0,452	0,056	0,170	0,16	76	995	8 x 16	ECR1CXY471M◇◇△△0816
		0,452	0,053	0,160	0,16	76	1030	10 x 12,5	ECR1CXY471M◇◇△△1012
	680	0,313	0,041	0,130	0,16	109	1250	8 x 20	ECR1CXY681M◇◇△△0820
		0,313	0,038	0,120	0,16	109	1430	10 x 16	ECR1CXY681M◇◇△△1016
	1 000	0,213	0,023	0,069	0,16	160	1820	10 x 20	ECR1CXY102M◇◇△△1020
	1 200	0,177	0,022	0,066	0,16	192	2150	10 x 25	ECR1CXY122M◇◇△△1025
	1 500	0,142	0,021	0,053	0,16	240	2360	12,5 x 20	ECR1CXY152M◇◇△△1220
	2 200	0,109	0,018	0,045	0,18	352	2770	12,5 x 25	ECR1CXY222M◇◇△△1225
	2 700	0,089	0,016	0,041	0,18	432	3290	12,5 x 30	ECR1CXY272M◇◇△△1230
		0,089	0,018	0,045	0,18	432	3140	16 x 20	ECR1CXY272M◇◇△△1620
	3 300	0,081	0,015	0,039	0,20	528	3400	12,5 x 35	ECR1CXY332M◇◇△△1235
	3 900	0,069	0,016	0,043	0,20	624	3460	16 x 25	ECR1CXY392M◇◇△△1625
25 (32) 1E	47	3,96	0,300	1,00	0,14	12	250	5 x 11,5	ECR1EXY470M◇◇△△0511
	100	1,86	0,130	0,410	0,14	25	405	6,3 x 11,5	ECR1EXY101M◇◇△△0611
		0,845	0,072	0,220	0,14	55	760	8 x 11,5	ECR1EXY221M◇◇△△0811
	220	0,845	0,072	0,220	0,14	55	760	8 x 11,5	ECR1EXY221M◇◇△△0811
		0,563	0,056	0,170	0,14	83	995	8 x 16	ECR1EXY331M◇◇△△0816
	330	0,563	0,053	0,160	0,14	83	1030	10 x 12,5	ECR1EXY331M◇◇△△1012
		0,396	0,041	0,130	0,14	118	1250	8 x 20	ECR1EXY471M◇◇△△0820
	470	0,396	0,041	0,130	0,14	118	1250	8 x 20	ECR1EXY471M◇◇△△0820
		0,396	0,038	0,120	0,14	118	1430	10 x 16	ECR1EXY471M◇◇△△1016
	680	0,274	0,023	0,069	0,14	170	1820	10 x 20	ECR1EXY681M◇◇△△1020
	820	0,227	0,022	0,066	0,14	205	2150	10 x 25	ECR1EXY821M◇◇△△1025
	1 000	0,186	0,021	0,053	0,14	250	2360	12,5 x 20	ECR1EXY102M◇◇△△1220
	1 500	0,124	0,018	0,045	0,14	375	2770	12,5 x 25	ECR1EXY152M◇◇△△1225
	1 800	0,104	0,016	0,041	0,14	450	3290	12,5 x 30	ECR1EXY182M◇◇△△1230
		0,104	0,018	0,045	0,14	450	3140	16 x 20	ECR1EXY182M◇◇△△1620
2 200	0,097	0,015	0,039	0,16	550	3400	12,5 x 35	ECR1EXY222M◇◇△△1235	
2 700	0,079	0,016	0,043	0,16	675	3460	16 x 25	ECR1EXY272M◇◇△△1625	

RADIAL

>>



RADIAL


U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance	Z <sub>max</sub> Max Impedance		tanδ Dissipation Factor	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current	Size øD x L	ORDER CODE
			20°C 120kHz	20°C 100kHz					
(V)	(µF)	(Ω)	(Ω)	(Ω)		(µA)	(mA <sub>RMS</sub> )	(mm)	Details: Page 15
35 (44) 1V	33	4,82	0,300	1,00	0,12	12	250	5 x 11,5	ECR1VXY330M◇◇◇◇0511
	56	2,85	0,130	0,410	0,12	20	405	6,3 x 11,5	ECR1VXY560M◇◇◇◇0611
	150	1,07	0,072	0,220	0,12	53	760	8 x 11,5	ECR1VXY151M◇◇◇◇0811
	220	0,724	0,056	0,170	0,12	77	995	8 x 16	ECR1VXY221M◇◇◇◇0816
		0,724	0,053	0,160	0,12	77	1030	10 x 12,5	ECR1VXY221M◇◇◇◇1012
	270	0,590	0,041	0,130	0,12	95	1250	8 x 20	ECR1VXY271M◇◇◇◇0820
	330	0,483	0,038	0,120	0,12	116	1430	10 x 16	ECR1VXY331M◇◇◇◇1016
	470	0,339	0,023	0,069	0,12	165	1820	10 x 20	ECR1VXY471M◇◇◇◇1020
	560	0,285	0,022	0,066	0,12	196	2150	10 x 25	ECR1VXY561M◇◇◇◇1025
	680	0,235	0,021	0,053	0,12	238	2360	12,5 x 20	ECR1VXY681M◇◇◇◇1220
	1 000	0,160	0,018	0,045	0,12	350	2770	12,5 x 25	ECR1VXY102M◇◇◇◇1225
	1 200	0,133	0,016	0,041	0,12	420	3290	12,5 x 30	ECR1VXY122M◇◇◇◇1230
		0,133	0,018	0,045	0,12	420	3140	16 x 20	ECR1VXY122M◇◇◇◇1620
	1 500	0,107	0,015	0,039	0,12	525	3400	12,5 x 35	ECR1VXY152M◇◇◇◇1235
	1 800	0,089	0,016	0,043	0,12	630	3460	16 x 25	ECR1VXY182M◇◇◇◇1625
50 (63) 1H	22	6,3	0,340	1,18	0,10	11	238	5 x 11,5	ECR1HXY220M◇◇◇◇0511
	56	2,37	0,140	0,500	0,10	28	385	6,3 x 11,5	ECR1HXY560M◇◇◇◇0611
	100	1,33	0,074	0,220	0,10	50	724	8 x 11,5	ECR1HXY101M◇◇◇◇0811
	120	1,11	0,061	0,180	0,10	60	950	8 x 16	ECR1HXY121M◇◇◇◇0816
	150	0,885	0,061	0,180	0,10	75	979	10 x 12,5	ECR1HXY151M◇◇◇◇1012
	180	0,737	0,046	0,140	0,10	90	1190	8 x 20	ECR1HXY181M◇◇◇◇0820
	220	0,603	0,042	0,120	0,10	110	1370	10 x 16	ECR1HXY221M◇◇◇◇1016
	270	0,492	0,030	0,090	0,10	135	1580	10 x 20	ECR1HXY271M◇◇◇◇1020
	330	0,402	0,028	0,085	0,10	165	1870	10 x 25	ECR1HXY331M◇◇◇◇1025
	560	0,237	0,023	0,059	0,10	280	2410	12,5 x 25	ECR1HXY561M◇◇◇◇1225
	680	0,196	0,021	0,052	0,10	340	2860	12,5 x 30	ECR1HXY681M◇◇◇◇1230
	820	0,162	0,019	0,051	0,10	410	2960	12,5 x 35	ECR1HXY821M◇◇◇◇1235
		0,162	0,023	0,059	0,10	410	2730	16 x 20	ECR1HXY821M◇◇◇◇1620
	1 000	0,133	0,021	0,056	0,10	500	3010	16 x 25	ECR1HXY102M◇◇◇◇1625
	63 (79) 1J	15	7,96	0,880	3,50	0,09	10	165	5 x 11,5
33		3,62	0,350	1,40	0,09	21	265	6,3 x 11,5	ECR1JXY330M◇◇◇◇0611
56		2,14	0,220	0,880	0,09	36	500	8 x 11,5	ECR1JXY560M◇◇◇◇0811
82		1,46	0,160	0,640	0,09	52	665	8 x 16	ECR1JXY820M◇◇◇◇0816
		1,46	0,150	0,600	0,09	52	685	10 x 12,5	ECR1JXY820M◇◇◇◇1012
120		0,995	0,120	0,480	0,09	76	820	8 x 20	ECR1JXY121M◇◇◇◇0820
		0,995	0,110	0,440	0,09	76	945	10 x 16	ECR1JXY121M◇◇◇◇1016
180		0,664	0,080	0,320	0,09	114	1100	10 x 20	ECR1JXY181M◇◇◇◇1020
		0,664	0,082	0,270	0,09	114	1135	12,5 x 16	ECR1JXY181M◇◇◇◇1216
220		0,543	0,073	0,290	0,09	139	1300	10 x 25	ECR1JXY221M◇◇◇◇1025
270		0,443	0,060	0,200	0,09	171	1495	12,5 x 20	ECR1JXY271M◇◇◇◇1220
330		0,362	0,043	0,140	0,09	208	1850	12,5 x 25	ECR1JXY331M◇◇◇◇1225
470		0,254	0,039	0,130	0,09	297	2250	12,5 x 30	ECR1JXY471M◇◇◇◇1230
		0,254	0,045	0,140	0,09	297	1990	16 x 20	ECR1JXY471M◇◇◇◇1620
560		0,214	0,033	0,110	0,09	353	2450	12,5 x 35	ECR1JXY561M◇◇◇◇1235
		0,214	0,032	0,096	0,09	353	2550	16 x 25	ECR1JXY561M◇◇◇◇1625
680		0,176	0,029	0,096	0,09	429	2780	12,5 x 40	ECR1JXY681M◇◇◇◇1240
		0,176	0,038	0,100	0,09	429	2450	18 x 20	ECR1JXY681M◇◇◇◇1820
820		0,146	0,026	0,078	0,09	517	2810	16 x 31,5	ECR1JXY821M◇◇◇◇1631
		0,146	0,031	0,084	0,09	517	2780	18 x 25	ECR1JXY821M◇◇◇◇1825
1 000	0,120	0,021	0,063	0,09	630	2835	16 x 35,5	ECR1JXY102M◇◇◇◇1635	
	0,120	0,025	0,068	0,09	630	3270	18 x 31,5	ECR1JXY102M◇◇◇◇1831	
1 200	0,100	0,019	0,057	0,09	756	3340	16 x 40	ECR1JXY122M◇◇◇◇1640	
	0,100	0,020	0,054	0,09	756	3310	18 x 35,5	ECR1JXY122M◇◇◇◇1835	
1 500	0,080	0,018	0,049	0,09	945	3420	18 x 40	ECR1JXY152M◇◇◇◇1840	
100 (125) 2A	6,8	16,6	1,40	5,60	0,08	7	125	5 x 11,5	ECR2AXY68M◇◇◇◇0511
	15	7,08	0,570	2,30	0,08	15	205	6,3 x 11,5	ECR2AXY150M◇◇◇◇0611
	27	3,93	0,360	1,40	0,08	27	355	8 x 11,5	ECR2AXY270M◇◇◇◇0811
	39	2,73	0,250	1,00	0,08	39	450	8 x 16	ECR2AXY390M◇◇◇◇0816
	47	2,26	0,240	0,960	0,08	47	450	10 x 12,5	ECR2AXY470M◇◇◇◇1012
	56	1,90	0,190	0,760	0,08	56	565	8 x 20	ECR2AXY560M◇◇◇◇0820
	68	1,57	0,180	0,720	0,08	68	580	10 x 16	ECR2AXY680M◇◇◇◇1016
	82	1,30	0,130	0,520	0,08	82	750	10 x 20	ECR2AXY820M◇◇◇◇1020
		1,30	0,130	0,430	0,08	82	735	12,5 x 16	ECR2AXY820M◇◇◇◇1216
	100	1,07	0,120	0,480	0,08	100	880	10 x 25	ECR2AXY101M◇◇◇◇1025



$U_{RDC}$ (Surge Voltage) Code	$C_R$ Rated Capacitance	$ESR_{max}$ Equivalent Series Resistance	$Z_{max}$ Max Impedance	$Z_{max}$ Max Impedance	$\tan\delta$ Dissipation Factor	$I_{leak}$ Leakage Current	$I_{RAC}$ Rated Ripple Current	Size $\varnothing D \times L$	ORDER CODE  ◇◇ = pin style & length △△ = pitch code  Details: Page 15	
(V)	( $\mu F$ )	20°C 120Hz ( $\Omega$ )	20°C 100kHz ( $\Omega$ )	-10°C 100kHz ( $\Omega$ )	20°C 120Hz	( $\mu A$ )	105°C 100kHz (mA <sub>RMS</sub> )	(mm)		
<b>100 (125) 2A</b>	120	0,885	0,094	0,310	0,08	120	1045	12,5 x 20	ECR2AXY121M◇◇△△1220	
	180	0,590	0,071	0,230	0,08	180	1195	12,5 x 25	ECR2AXY181M◇◇△△1225	
	220	220	0,483	0,063	0,210	0,08	220	1410	12,5 x 30	ECR2AXY221M◇◇△△1230
			0,483	0,071	0,210	0,08	220	1295	16 x 20	ECR2AXY221M◇◇△△1620
	270	270	0,393	0,052	0,170	0,08	270	1560	12,5 x 35	ECR2AXY271M◇◇△△1235
			0,393	0,053	0,160	0,08	270	1600	16 x 25	ECR2AXY271M◇◇△△1625
			0,393	0,069	0,190	0,08	270	1470	18 x 20	ECR2AXY271M◇◇△△1820
	330	330	0,322	0,046	0,150	0,08	330	1700	12,5 x 40	ECR2AXY331M◇◇△△1240
	390	390	0,273	0,041	0,120	0,08	390	1750	16 x 31,5	ECR2AXY391M◇◇△△1631
			0,273	0,049	0,130	0,08	390	1620	18 x 25	ECR2AXY391M◇◇△△1825
	470	470	0,226	0,033	0,100	0,08	470	1890	16 x 35,5	ECR2AXY471M◇◇△△1635
			0,226	0,039	0,110	0,08	470	1775	18 x 31,5	ECR2AXY471M◇◇△△1831
	560	560	0,190	0,030	0,090	0,08	560	2080	16 x 40	ECR2AXY561M◇◇△△1640
			0,190	0,031	0,084	0,08	560	2060	18 x 35,5	ECR2AXY561M◇◇△△1835
	680	680	0,157	0,028	0,076	0,08	680	2570	18 x 40	ECR2AXY681M◇◇△△1840

8 000 - 12 000h at 105°C

- Miniaturized
- Ultra Low ESR

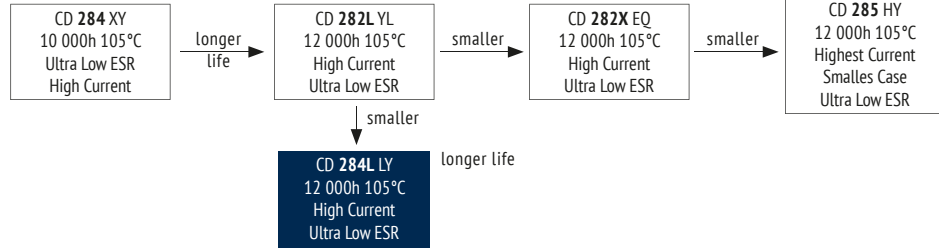

ITEM CHARACTERISTICS

Operating Temperature Range (°C)	-40 ~ +105
Voltage Range (V)	6,3 ~ 100
Capacitance Range (µF)	8,2 ~ 8 200
Capacitance Tolerance (20°C, 120Hz)	± 20%

**!** The usage at lower temperatures than indicated may be possible. Please contact the Jianghai Europe sales office for approval.

Leakage Current (µA) After 2 minutes at 20°C application of rated voltage, leakage current is not more than specified in table.

Stability at Low Temperature (Impedance Ratio at 120Hz)	Rated Voltage (V)	6,3	10	16	25	35	50	63	80	100
	Z <sub>-25°C</sub> / Z <sub>+20°C</sub>		4	3				2		
Z <sub>-40°C</sub> / Z <sub>+20°C</sub>		12	10	8	6	4			3	

ITEM USEFUL LIFE LOAD LIFE ENDURANCE TEST SHELF LIFE


Lifetime	$\emptyset \leq 6,3$ : 8 000h $\emptyset = 8$ : 10 000h $\emptyset \geq 10$ : 12 000h	$\emptyset \geq 8$ : > 100 000h	$\emptyset \leq 6,3$ : 6 000h $\emptyset = 8$ : 8 000h $\emptyset \geq 10$ : 10 000h	$\emptyset \leq 6,3$ : 7 000h $\emptyset = 8$ : 10 000h $\emptyset \geq 10$ : 12 000h	500h
Leakage Current	Not more than specified value		Not more than specified value	Not more than specified value	Not more than specified value
Capacitance Change	Within ± 30% of initial value (6,3V, 10V, ± 40%)		Within ± 25% of initial value (6,3V, 10V, ± 30%)	Within ± 25% of initial value (6,3V, 10V, ± 30%)	Within ± 20% of initial value
Dissipation Factor	Not more than 300% of specified value (6,3V, 10V, 400%)		Not more than 200% of specified value (6,3V, 10V, 300%)	Not more than 200% of specified value (6,3V, 10V, 300%)	Not more than 200% of specified value
Condition: Applied Voltage Applied Current Applied Temperature	$U_R$ $I_R$ 105°C	$U_R$ $1,4 \times I_R$ 60°C	$U_R$ $I_R$ 105°C	$U_R$ $I_R = 0$ 105°C IEC 60384	$U_R = 0$ $I_R = 0$ 105°C After test: $U_R$ to be applied for 30 min > 24h before measurement

MULTIPLIER FOR RIPPLE CURRENT (FREQUENCY COEFFICIENT)

Capacitance (µF)	Frequency			
	120Hz	1kHz	10kHz	100kHz
8,2 ~ 33	0,42	0,70	0,90	1,00
47 ~ 270	0,50	0,73	0,92	1,00
330 ~ 680	0,55	0,77	0,94	1,00
820 ~ 1 800	0,60	0,80	0,96	1,00
2 200 ~ 6 800	0,70	0,85	0,98	1,00

Multipliers for typical operating conditions.

MULTIPLIER FOR LIFETIME (LIFETIME DIAGRAM)

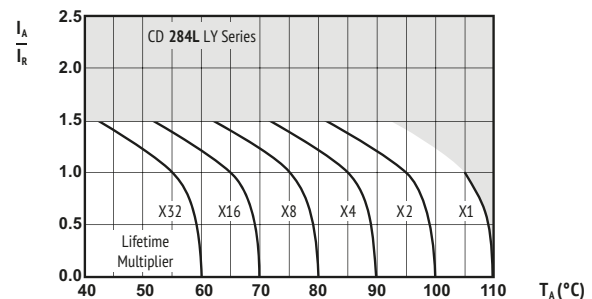

$I_A$  = actual ripple current at 100kHz,  
 $I_R$  = rated ripple current at 100kHz, 105°C  
 Multiplier of Useful Life as a function of ambient temperature & ripple current load

ENVIRONMENTAL

The products are RoHS, WEEE and REACH compliant. The detailed version please see separate "Environmental Certificates" document or [www.jianghai-europe.com](http://www.jianghai-europe.com)

**!** SAFETY FACTOR

This diagram includes a safety margin. In many cases the allowed current capability/lifetime may be increased. For details and approvals please contact the Jianghai Europe sales office.





U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance	Z <sub>max</sub> Max Impedance		tanδ Dissipation Factor	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current	Size øD x L	ORDER CODE
			20°C 120Hz	20°C 100kHz					
(V)	(µF)	(Ω)	(Ω)	(Ω)		(µA)	(mA <sub>RMS</sub> )	(mm)	Details: Page 15
<b>6,3</b> <b>(7,2)</b> <b>0J</b>	220	1,33	0,220	0,800	0,22	14	345	5 x 11,5	ECR0JLY221M◇◇◇◇0511
	470	0,621	0,094	0,350	0,22	30	540	6,3 x 11,5	ECR0JLY471M◇◇◇◇0611
	820	0,356	0,056	0,190	0,22	52	945	8 x 11,5	ECR0JLY821M◇◇◇◇0811
	1 200	0,243	0,045	0,150	0,22	76	1250	8 x 16	ECR0JLY122M◇◇◇◇0816
		0,243	0,039	0,140	0,22	76	1330	10 x 12,5	ECR0JLY122M◇◇◇◇1012
	1 500	0,195	0,029	0,110	0,22	95	1500	8 x 20	ECR0JLY152M◇◇◇◇0820
	1 800	0,162	0,028	0,100	0,22	114	1760	10 x 16	ECR0JLY182M◇◇◇◇1016
	2 200	0,145	0,020	0,060	0,24	139	1960	10 x 20	ECR0JLY222M◇◇◇◇1020
	2 700	0,118	0,018	0,054	0,24	171	2250	10 x 25	ECR0JLY272M◇◇◇◇1025
	3 900	0,088	0,017	0,043	0,26	246	2480	12,5 x 20	ECR0JLY392M◇◇◇◇1220
	4 700	0,079	0,015	0,038	0,28	297	2900	12,5 x 25	ECR0JLY472M◇◇◇◇1225
	5 600	0,071	0,013	0,033	0,30	353	3450	12,5 x 30	ECR0JLY562M◇◇◇◇1230
	8 200	0,062	0,015	0,038	0,32	429	3250	16 x 20	ECR0JLY822M◇◇◇◇1620
<b>10</b> <b>(13)</b> <b>1A</b>	150	1,68	0,220	0,800	0,19	15	345	5 x 11,5	ECR1ALY151M◇◇◇◇0511
	330	0,764	0,094	0,350	0,19	33	540	6,3 x 11,5	ECR1ALY331M◇◇◇◇0611
	680	0,371	0,056	0,190	0,19	68	945	8 x 11,5	ECR1ALY681M◇◇◇◇0811
	1 000	0,252	0,045	0,150	0,19	100	1250	8 x 16	ECR1ALY102M◇◇◇◇0816
		0,252	0,039	0,140	0,19	100	1330	10 x 12,5	ECR1ALY102M◇◇◇◇1012
	1 500	0,168	0,029	0,110	0,19	150	1500	8 x 20	ECR1ALY152M◇◇◇◇0820
		0,168	0,028	0,100	0,19	150	1760	10 x 16	ECR1ALY152M◇◇◇◇1016
	1 800	0,140	0,020	0,060	0,19	180	1960	10 x 20	ECR1ALY182M◇◇◇◇1020
	2 200	0,127	0,018	0,054	0,21	220	2250	10 x 25	ECR1ALY222M◇◇◇◇1025
	3 300	0,092	0,017	0,043	0,23	330	2480	12,5 x 20	ECR1ALY332M◇◇◇◇1220
	3 900	0,078	0,015	0,038	0,23	390	2900	12,5 x 25	ECR1ALY392M◇◇◇◇1225
	4 700	0,071	0,013	0,033	0,25	470	3450	12,5 x 30	ECR1ALY472M◇◇◇◇1230
		0,071	0,015	0,038	0,25	470	3250	16 x 20	ECR1ALY472M◇◇◇◇1620
	5 600	0,064	0,012	0,031	0,27	560	3570	12,5 x 35	ECR1ALY562M◇◇◇◇1235
	6 800	0,057	0,013	0,035	0,29	680	3630	16 x 25	ECR1ALY682M◇◇◇◇1625
<b>16</b> <b>(20)</b> <b>1C</b>	100	2,13	0,220	0,800	0,16	16	345	5 x 11,5	ECR1CLY101M◇◇◇◇0511
	220	0,965	0,094	0,350	0,16	36	540	6,3 x 11,5	ECR1CLY221M◇◇◇◇0611
	470	0,452	0,056	0,190	0,16	76	945	8 x 11,5	ECR1CLY471M◇◇◇◇0811
	680	0,312	0,045	0,150	0,16	109	1250	8 x 16	ECR1CLY681M◇◇◇◇0816
		0,312	0,039	0,140	0,16	109	1330	10 x 12,5	ECR1CLY681M◇◇◇◇1012
	1 000	0,212	0,029	0,110	0,16	160	1500	8 x 20	ECR1CLY102M◇◇◇◇0820
		0,212	0,028	0,100	0,16	160	1760	10 x 16	ECR1CLY102M◇◇◇◇1016
	1 500	0,141	0,020	0,060	0,16	240	1960	10 x 20	ECR1CLY152M◇◇◇◇1020
	1 800	0,118	0,018	0,054	0,16	288	2250	10 x 25	ECR1CLY182M◇◇◇◇1025
	2 200	0,109	0,017	0,043	0,18	352	2480	12,5 x 20	ECR1CLY222M◇◇◇◇1220
	2 700	0,088	0,015	0,038	0,18	432	2900	12,5 x 25	ECR1CLY272M◇◇◇◇1225
	3 300	0,080	0,013	0,033	0,20	528	3450	12,5 x 30	ECR1CLY332M◇◇◇◇1230
		0,080	0,015	0,038	0,20	528	3250	16 x 20	ECR1CLY332M◇◇◇◇1620
	3 900	0,068	0,012	0,031	0,20	624	3570	12,5 x 35	ECR1CLY392M◇◇◇◇1235
	4 700	0,062	0,013	0,035	0,22	752	3630	16 x 25	ECR1CLY472M◇◇◇◇1625
<b>25</b> <b>(32)</b> <b>1E</b>	68	2,74	0,220	0,800	0,14	17	345	5 x 11,5	ECR1ELY680M◇◇◇◇0511
	150	1,24	0,094	0,350	0,14	38	540	6,3 x 11,5	ECR1ELY151M◇◇◇◇0611
	330	0,563	0,056	0,190	0,14	83	945	8 x 11,5	ECR1ELY331M◇◇◇◇0811
	390	0,476	0,045	0,150	0,14	98	1250	8 x 16	ECR1ELY391M◇◇◇◇0816
	470	0,395	0,039	0,140	0,14	118	1330	10 x 12,5	ECR1ELY471M◇◇◇◇1012
	560	0,332	0,029	0,110	0,14	140	1500	8 x 20	ECR1ELY561M◇◇◇◇0820
	680	0,273	0,028	0,100	0,14	170	1760	10 x 16	ECR1ELY681M◇◇◇◇1016
	820	0,226	0,020	0,060	0,14	205	1960	10 x 20	ECR1ELY821M◇◇◇◇1020
	1 000	0,186	0,018	0,054	0,14	250	2250	10 x 25	ECR1ELY102M◇◇◇◇1025
	1 500	0,124	0,017	0,043	0,14	375	2480	12,5 x 20	ECR1ELY152M◇◇◇◇1220
	1 800	0,103	0,015	0,038	0,14	450	2900	12,5 x 25	ECR1ELY182M◇◇◇◇1225
		0,096	0,013	0,033	0,16	550	3450	12,5 x 30	ECR1ELY222M◇◇◇◇1230
	2 200	0,096	0,015	0,038	0,16	550	3250	16 x 20	ECR1ELY222M◇◇◇◇1620
		0,079	0,012	0,031	0,16	675	3570	12,5 x 35	ECR1ELY272M◇◇◇◇1235
	3 300	0,072	0,013	0,035	0,18	825	3630	16 x 25	ECR1ELY332M◇◇◇◇1625

**RADIAL**

&gt;&gt;


RADIAL

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance	Z <sub>max</sub> Max Impedance	Z <sub>max</sub> Max Impedance	tanδ Dissipation Factor	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current	Size øD x L	ORDER CODE
(V)	(µF)	20°C 120Hz (Ω)	20°C 100kHz (Ω)	-10°C 100kHz (Ω)	20°C 120Hz	(µA)	105°C 100kHz (mA <sub>rms</sub> )	(mm)	Details: Page 15
35 (44) 1V	47	3,39	0,220	0,800	0,12	17	345	5 x 11,5	ECR1VLY470M $\diamond\diamond\Delta\Delta$ 0511
	100	1,60	0,094	0,350	0,12	35	540	6,3 x 11,5	ECR1VLY101M $\diamond\diamond\Delta\Delta$ 0611
	220	0,723	0,056	0,190	0,12	77	945	8 x 11,5	ECR1VLY221M $\diamond\diamond\Delta\Delta$ 0811
	270	0,589	0,045	0,150	0,12	95	1250	8 x 16	ECR1VLY271M $\diamond\diamond\Delta\Delta$ 0816
	330	0,482	0,039	0,140	0,12	116	1330	10 x 12,5	ECR1VLY331M $\diamond\diamond\Delta\Delta$ 1012
	390	0,408	0,029	0,110	0,12	137	1500	8 x 20	ECR1VLY391M $\diamond\diamond\Delta\Delta$ 0820
	470	0,339	0,028	0,100	0,12	165	1760	10 x 16	ECR1VLY471M $\diamond\diamond\Delta\Delta$ 1016
	560	0,284	0,020	0,060	0,12	196	1960	10 x 20	ECR1VLY561M $\diamond\diamond\Delta\Delta$ 1020
	680	0,234	0,018	0,054	0,12	238	2250	10 x 25	ECR1VLY681M $\diamond\diamond\Delta\Delta$ 1025
	1 000	0,159	0,017	0,043	0,12	350	2480	12,5 x 20	ECR1VLY102M $\diamond\diamond\Delta\Delta$ 1220
	1 200	0,133	0,015	0,038	0,12	420	2900	12,5 x 25	ECR1VLY122M $\diamond\diamond\Delta\Delta$ 1225
	1 500	0,106	0,013	0,033	0,12	525	3450	12,5 x 30	ECR1VLY152M $\diamond\diamond\Delta\Delta$ 1230
		0,106	0,015	0,038	0,12	525	3250	16 x 20	ECR1VLY152M $\diamond\diamond\Delta\Delta$ 1620
	1 800	0,088	0,012	0,031	0,12	630	3570	12,5 x 35	ECR1VLY182M $\diamond\diamond\Delta\Delta$ 1235
	2 200	0,084	0,013	0,035	0,14	770	3630	16 x 25	ECR1VLY222M $\diamond\diamond\Delta\Delta$ 1625
50 (63) 1H	27	4,92	0,340	1,18	0,10	14	238	5 x 11,5	ECR1HLY270M $\diamond\diamond\Delta\Delta$ 0511
	56	2,37	0,140	0,500	0,10	28	385	6,3 x 11,5	ECR1HLY560M $\diamond\diamond\Delta\Delta$ 0611
	100	1,33	0,074	0,220	0,10	50	724	8 x 11,5	ECR1HLY101M $\diamond\diamond\Delta\Delta$ 0811
	120	1,11	0,061	0,180	0,10	60	950	8 x 16	ECR1HLY121M $\diamond\diamond\Delta\Delta$ 0816
	150	0,884	0,061	0,180	0,10	75	979	10 x 12,5	ECR1HLY151M $\diamond\diamond\Delta\Delta$ 1012
	180	0,737	0,046	0,140	0,10	90	1190	8 x 20	ECR1HLY181M $\diamond\diamond\Delta\Delta$ 0820
	220	0,603	0,042	0,120	0,10	110	1370	10 x 16	ECR1HLY221M $\diamond\diamond\Delta\Delta$ 1016
	270	0,491	0,030	0,090	0,10	135	1580	10 x 20	ECR1HLY271M $\diamond\diamond\Delta\Delta$ 1020
	330	0,402	0,028	0,085	0,10	165	1870	10 x 25	ECR1HLY331M $\diamond\diamond\Delta\Delta$ 1025
	470	0,282	0,027	0,068	0,10	235	2050	12,5 x 20	ECR1HLY471M $\diamond\diamond\Delta\Delta$ 1220
	560	0,237	0,023	0,059	0,10	280	2410	12,5 x 25	ECR1HLY561M $\diamond\diamond\Delta\Delta$ 1225
	680	0,195	0,021	0,052	0,10	340	2860	12,5 x 30	ECR1HLY681M $\diamond\diamond\Delta\Delta$ 1230
	820	0,162	0,019	0,050	0,10	410	2960	12,5 x 35	ECR1HLY821M $\diamond\diamond\Delta\Delta$ 1235
		0,162	0,023	0,059	0,10	410	2730	16 x 20	ECR1HLY821M $\diamond\diamond\Delta\Delta$ 1620
	1 000	0,133	0,021	0,056	0,10	500	3010	16 x 25	ECR1HLY102M $\diamond\diamond\Delta\Delta$ 1625
63 (79) 1J	15	7,96	0,880	3,50	0,09	10	173	5 x 11,5	ECR1JLY150M $\diamond\diamond\Delta\Delta$ 0511
	33	3,62	0,350	1,40	0,09	21	278	6,3 x 11,5	ECR1JLY330M $\diamond\diamond\Delta\Delta$ 0611
	82	1,45	0,220	0,880	0,09	52	525	8 x 11,5	ECR1JLY820M $\diamond\diamond\Delta\Delta$ 0811
	100	1,20	0,160	0,640	0,09	63	688	8 x 16	ECR1JLY101M $\diamond\diamond\Delta\Delta$ 0816
	120	0,995	0,150	0,600	0,09	76	725	10 x 12,5	ECR1JLY121M $\diamond\diamond\Delta\Delta$ 1012
	150	0,796	0,120	0,480	0,09	95	861	8 x 20	ECR1JLY151M $\diamond\diamond\Delta\Delta$ 0820
	180	0,663	0,110	0,440	0,09	114	998	10 x 16	ECR1JLY181M $\diamond\diamond\Delta\Delta$ 1016
	220	0,543	0,078	0,310	0,09	139	1200	10 x 20	ECR1JLY221M $\diamond\diamond\Delta\Delta$ 1020
	330	0,362	0,069	0,280	0,09	208	1410	10 x 25	ECR1JLY331M $\diamond\diamond\Delta\Delta$ 1025
	390	0,306	0,060	0,190	0,09	246	1570	12,5 x 20	ECR1JLY391M $\diamond\diamond\Delta\Delta$ 1220
	470	0,254	0,043	0,140	0,09	297	1990	12,5 x 25	ECR1JLY471M $\diamond\diamond\Delta\Delta$ 1225
	560	0,213	0,035	0,130	0,09	353	2410	12,5 x 30	ECR1JLY561M $\diamond\diamond\Delta\Delta$ 1230
		0,213	0,043	0,140	0,09	353	2100	16 x 20	ECR1JLY561M $\diamond\diamond\Delta\Delta$ 1620
	680	0,176	0,033	0,110	0,09	429	2620	12,5 x 35	ECR1JLY681M $\diamond\diamond\Delta\Delta$ 1235
	820	0,146	0,027	0,090	0,09	517	2940	12,5 x 40	ECR1JLY821M $\diamond\diamond\Delta\Delta$ 1240
		0,146	0,032	0,096	0,09	517	2730	16 x 25	ECR1JLY821M $\diamond\diamond\Delta\Delta$ 1625
		0,146	0,038	0,100	0,09	517	2500	18 x 20	ECR1JLY821M $\diamond\diamond\Delta\Delta$ 1820
	1 200	0,099	0,024	0,068	0,09	756	2990	16 x 31,5	ECR1JLY122M $\diamond\diamond\Delta\Delta$ 1631
0,099		0,031	0,084	0,09	756	2800	18 x 25	ECR1JLY122M $\diamond\diamond\Delta\Delta$ 1825	
1 500	0,080	0,021	0,057	0,09	945	3040	16 x 35,5	ECR1JLY152M $\diamond\diamond\Delta\Delta$ 1635	
	0,080	0,025	0,068	0,09	945	3300	18 x 31,5	ECR1JLY152M $\diamond\diamond\Delta\Delta$ 1831	
1 800	0,066	0,020	0,054	0,09	1134	3570	18 x 35,5	ECR1JLY182M $\diamond\diamond\Delta\Delta$ 1835	
2 200	0,066	0,018	0,049	0,11	1386	3670	18 x 40	ECR1JLY222M $\diamond\diamond\Delta\Delta$ 1840	
80 (100) 1K	12	8,85	1,40	5,60	0,08	10	163	5 x 11,5	ECR1KLY120M $\diamond\diamond\Delta\Delta$ 0511
	33	3,22	0,570	2,30	0,08	27	267	6,3 x 11,5	ECR1KLY330M $\diamond\diamond\Delta\Delta$ 0611
	56	1,90	0,360	1,40	0,08	45	462	8 x 11,5	ECR1KLY560M $\diamond\diamond\Delta\Delta$ 0811
	68	1,56	0,250	1,00	0,08	55	585	8 x 16	ECR1KLY680M $\diamond\diamond\Delta\Delta$ 0816
	82	1,30	0,230	0,960	0,08	66	624	10 x 12,5	ECR1KLY820M $\diamond\diamond\Delta\Delta$ 1012
	100	1,07	0,190	0,760	0,08	80	735	8 x 20	ECR1KLY101M $\diamond\diamond\Delta\Delta$ 0820
	120	0,884	0,170	0,720	0,08	96	780	10 x 16	ECR1KLY121M $\diamond\diamond\Delta\Delta$ 1016
	180	0,589	0,120	0,520	0,08	144	1040	10 x 20	ECR1KLY181M $\diamond\diamond\Delta\Delta$ 1020
	220	0,482	0,110	0,470	0,08	176	1170	10 x 25	ECR1KLY221M $\diamond\diamond\Delta\Delta$ 1025
	270	0,393	0,085	0,310	0,08	216	1430	12,5 x 20	ECR1KLY271M $\diamond\diamond\Delta\Delta$ 1220



$U_{RDC}$ (Surge Voltage) Code	$C_R$ Rated Capacitance	$ESR_{max}$ Equivalent Series Resistance	$Z_{max}$ Max Impedance	$Z_{max}$ Max Impedance	$\tan\delta$ Dissipation Factor	$I_{leak}$ Leakage Current	$I_{RAC}$ Rated Ripple Current	Size $\varnothing D \times L$	ORDER CODE  ◇◇ = pin style & length △△ = pitch code  Details: Page 15
(V)	( $\mu F$ )	20°C 120Hz ( $\Omega$ )	20°C 100kHz ( $\Omega$ )	-10°C 100kHz ( $\Omega$ )	20°C 120Hz	( $\mu A$ )	105°C 100kHz (mA <sub>RMS</sub> )	(mm)	
<b>80</b> (100) 1K	330	0,322	0,060	0,230	0,08	264	1620	12,5 x 25	ECR1KLY331M◇◇△△1225
	390	0,272	0,051	0,210	0,08	312	1950	12,5 x 30	ECR1KLY391M◇◇△△1230
		0,272	0,058	0,210	0,08	312	1750	16 x 20	ECR1KLY391M◇◇△△1620
	470	0,226	0,043	0,170	0,08	376	2140	12,5 x 35	ECR1KLY471M◇◇△△1235
		0,189	0,036	0,150	0,08	448	2340	12,5 x 40	ECR1KLY561M◇◇△△1240
	560	0,189	0,044	0,160	0,08	448	2210	16 x 25	ECR1KLY561M◇◇△△1625
		0,189	0,054	0,180	0,08	448	1950	18 x 20	ECR1KLY561M◇◇△△1820
		0,156	0,033	0,120	0,08	544	2400	16 x 31,5	ECR1KLY681M◇◇△△1631
	680	0,129	0,029	0,100	0,08	656	2600	16 x 35,5	ECR1KLY821M◇◇△△1635
		0,129	0,038	0,130	0,08	656	2270	18 x 25	ECR1KLY821M◇◇△△1825
	1 000	0,106	0,027	0,090	0,08	800	2860	16 x 40	ECR1KLY102M◇◇△△1640
		0,106	0,031	0,110	0,08	800	2470	18 x 31,5	ECR1KLY102M◇◇△△1831
	1 200	0,088	0,027	0,084	0,08	960	2860	18 x 35,5	ECR1KLY122M◇◇△△1835
	1 500	0,071	0,026	0,076	0,08	1200	3510	18 x 40	ECR1KLY152M◇◇△△1840
<b>100</b> (125) 2A	8,2	13,0	1,40	5,60	0,08	9	163	5 x 11,5	ECR2ALY8R2M◇◇△△0511
	18	5,90	0,570	2,30	0,08	18	267	6,3 x 11,5	ECR2ALY180M◇◇△△0611
	33	3,22	0,360	1,40	0,08	33	462	8 x 11,5	ECR2ALY330M◇◇△△0811
	47	2,26	0,250	1,00	0,08	47	585	8 x 16	ECR2ALY470M◇◇△△0816
	56	1,90	0,230	0,960	0,08	56	624	10 x 12,5	ECR2ALY560M◇◇△△1012
	68	1,56	0,190	0,760	0,08	68	735	8 x 20	ECR2ALY680M◇◇△△0820
	82	1,30	0,170	0,720	0,08	82	780	10 x 16	ECR2ALY820M◇◇△△1016
	100	1,07	0,120	0,520	0,08	100	1040	10 x 20	ECR2ALY101M◇◇△△1020
	120	0,884	0,110	0,470	0,08	120	1170	10 x 25	ECR2ALY121M◇◇△△1025
	150	0,707	0,085	0,310	0,08	150	1430	12,5 x 20	ECR2ALY151M◇◇△△1220
	220	0,482	0,060	0,230	0,08	220	1620	12,5 x 25	ECR2ALY221M◇◇△△1225
	270	0,393	0,051	0,210	0,08	270	1950	12,5 x 30	ECR2ALY271M◇◇△△1230
		0,393	0,058	0,210	0,08	270	1750	16 x 20	ECR2ALY271M◇◇△△1620
	330	0,322	0,043	0,170	0,08	330	2140	12,5 x 35	ECR2ALY331M◇◇△△1235
	390	0,272	0,036	0,150	0,08	390	2340	12,5 x 40	ECR2ALY391M◇◇△△1240
		0,272	0,044	0,160	0,08	390	2210	16 x 25	ECR2ALY391M◇◇△△1625
		0,272	0,054	0,180	0,08	390	1950	18 x 20	ECR2ALY391M◇◇△△1820
	470	0,226	0,033	0,120	0,08	470	2400	16 x 31,5	ECR2ALY471M◇◇△△1631
		0,226	0,038	0,113	0,08	470	2270	18 x 25	ECR2ALY471M◇◇△△1825
	560	0,189	0,029	0,100	0,08	560	2600	16 x 35,5	ECR2ALY561M◇◇△△1635
		0,189	0,031	0,110	0,08	560	2470	18 x 31,5	ECR2ALY561M◇◇△△1831
680	0,156	0,027	0,090	0,08	680	2860	16 x 40	ECR2ALY681M◇◇△△1640	
	0,156	0,027	0,084	0,08	680	2860	18 x 35,5	ECR2ALY681M◇◇△△1835	
820	0,129	0,026	0,076	0,08	820	3510	18 x 40	ECR2ALY821M◇◇△△1840	

**RADIAL**

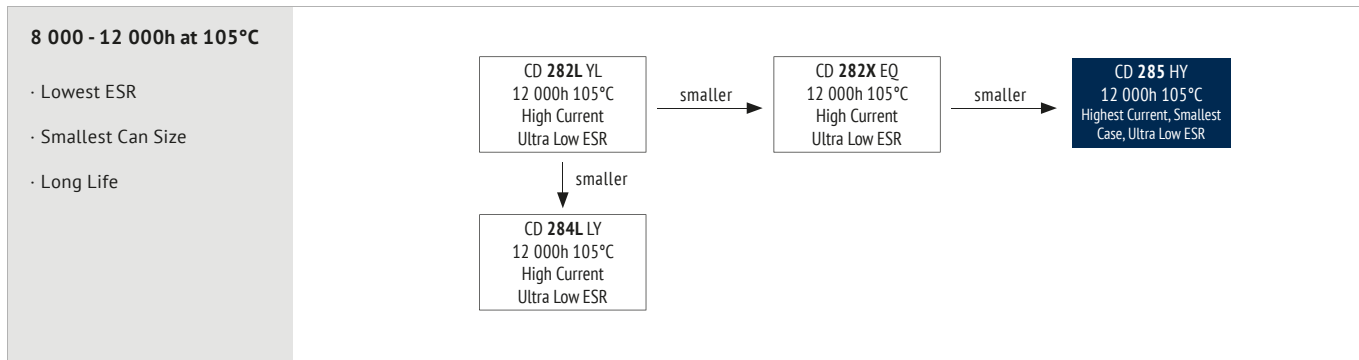

**ITEM CHARACTERISTICS**

Operating Temperature Range (°C)	-40 ~ +105
Voltage Range (V)	6,3 ~ 100
Capacitance Range (µF)	8,2 ~ 8 200
Capacitance Tolerance (20°C, 120Hz)	± 20%

**!** The usage at lower temperatures than indicated may be possible. Please contact the Jianghai Europe sales office for approval.

Leakage Current (µA) After 2 minutes at 20°C application of rated voltage, leakage current is not more than specified in table.

Stability at Low Temperature (Impedance Ratio at 120Hz)	Rated Voltage (V)	6,3	10	16	25	35	50	63	80	100
Z <sub>-25°C</sub> / Z <sub>+20°C</sub>		4	3				2			
Z <sub>-40°C</sub> / Z <sub>+20°C</sub>		12	10	8	6	4			3	

**ITEM USEFUL LIFE LOAD LIFE ENDURANCE TEST SHELF LIFE**


Lifetime	$\emptyset \leq 6,3$ : 8 000h $\emptyset = 8$ : 10 000h $\emptyset \geq 10$ : 12 000h	$\emptyset \geq 8$ : > 100 000h	$\emptyset \leq 6,3$ : 6 000h $\emptyset = 8$ : 8 000h $\emptyset \geq 10$ : 10 000h	$\emptyset \leq 6,3$ : 7 000h $\emptyset = 8$ : 10 000h $\emptyset \geq 10$ : 12 000h	500h
Leakage Current	Not more than specified value		Not more than specified value	Not more than specified value	Not more than specified value
Capacitance Change	Within ± 30% of initial value (6,3V, 10V, ± 40%)		Within ± 25% of initial value (6,3V, 10V, ± 30%)	Within ± 25% of initial value (6,3V, 10V, ± 30%)	Within ± 20% of initial value
Dissipation Factor	Not more than 300% of specified value (6,3V, 10V, 400%)		Not more than 200% of specified value (6,3V, 10V, 300%)	Not more than 200% of specified value (6,3V, 10V, 300%)	Not more than 200% of specified value
Condition: Applied Voltage Applied Current Applied Temperature	$U_R$ $I_R$ 105°C	$U_R$ $1,4 \times I_R$ 60°C	$U_R$ $I_R$ 105°C	$U_R$ $I_R = 0$ 105°C IEC 60384	After test: $U_R$ to be applied for 30 min > 24h before measurement

**MULTIPLIER FOR RIPPLE CURRENT (FREQUENCY COEFFICIENT)**

Capacitance (µF)	Frequency			
	120Hz	1kHz	10kHz	100kHz
8,2 ~ 33	0,42	0,70	0,90	1,00
47 ~ 270	0,50	0,73	0,92	1,00
330 ~ 680	0,55	0,77	0,94	1,00
820 ~ 1 800	0,60	0,80	0,96	1,00
2 200 ~ 8 200	0,70	0,85	0,98	1,00

Multipliers for typical operating conditions.

**MULTIPLIER FOR LIFETIME (LIFETIME DIAGRAM)**

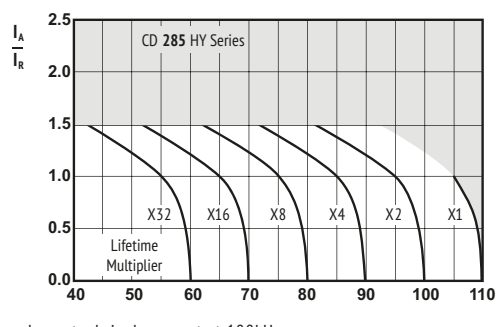

$I_A$  = actual ripple current at 100kHz,  
 $I_R$  = rated ripple current at 100kHz, 105°C  
 Multiplier of Useful Life as a function of ambient temperature & ripple current load

**ENVIRONMENTAL**

The products are RoHS, WEEE and REACH compliant. The detailed version please see separate "Environmental Certificates" document or [www.jianghai-europe.com](http://www.jianghai-europe.com)

**! SAFETY FACTOR**

This diagram includes a safety margin. In many cases the allowed current capability/lifetime may be increased. For details and approvals please contact the Jianghai Europe sales office.



U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance	Z <sub>max</sub> Max Impedance		tanδ Dissipation Factor	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current	Size øD x L	ORDER CODE
			20°C 120kHz	20°C 100kHz					
(V)	(µF)	(Ω)	(Ω)	(Ω)		(µA)	(mArms)	(mm)	Details: Page 15
<b>6,3</b> (7,2) 0J	220	1,33	0,400	1,20	0,22	14	345	5 x 11,5	ECROJHY221M◇◇◇◇0511
	470	0,621	0,170	0,510	0,22	30	540	6,3 x 11,5	ECROJHY471M◇◇◇◇0611
	820	0,356	0,075	0,230	0,22	52	945	8 x 11,5	ECROJHY821M◇◇◇◇0811
	1 000	0,292	0,059	0,180	0,22	63	1250	8 x 16	ECROJHY102M◇◇◇◇0816
	1 200	0,243	0,053	0,160	0,22	76	1330	10 x 12,5	ECROJHY122M◇◇◇◇1012
	1 500	0,195	0,041	0,130	0,22	95	1500	8 x 20	ECROJHY152M◇◇◇◇0820
	1 800	0,162	0,038	0,120	0,22	114	1760	10 x 16	ECROJHY182M◇◇◇◇1016
	2 700	0,118	0,028	0,084	0,24	171	1960	10 x 20	ECROJHY272M◇◇◇◇1020
	3 300	0,104	0,024	0,072	0,26	208	2250	10 x 25	ECROJHY332M◇◇◇◇1025
	3 900	0,088	0,025	0,075	0,26	246	2480	12,5 x 20	ECROJHY392M◇◇◇◇1220
	4 700	0,079	0,019	0,057	0,28	297	2900	12,5 x 25	ECROJHY472M◇◇◇◇1225
	5 600	0,071	0,018	0,054	0,30	353	3450	12,5 x 30	ECROJHY562M◇◇◇◇1230
	6 800	0,062	0,016	0,048	0,32	429	3570	12,5 x 35	ECROJHY682M◇◇◇◇1235
		0,062	0,021	0,063	0,32	429	3250	16 x 20	ECROJHY682M◇◇◇◇1620
	8 200	0,058	0,017	0,051	0,36	517	3630	16 x 25	ECROJHY822M◇◇◇◇1625
<b>10</b> (13) 1A	150	1,68	0,400	1,20	0,19	15	450	5 x 11,5	ECR1AHY151M◇◇◇◇0511
	330	0,764	0,170	0,510	0,19	33	700	6,3 x 11,5	ECR1AHY331M◇◇◇◇0611
	560	0,450	0,075	0,230	0,19	56	1200	8 x 11,5	ECR1AHY561M◇◇◇◇0811
	680	0,371	0,059	0,180	0,19	68	1600	8 x 16	ECR1AHY681M◇◇◇◇0816
	820	0,307	0,053	0,160	0,19	82	1700	10 x 12,5	ECR1AHY821M◇◇◇◇1012
	1 000	0,252	0,041	0,130	0,19	100	1960	8 x 20	ECR1AHY102M◇◇◇◇0820
	1 200	0,210	0,038	0,120	0,19	120	2000	10 x 16	ECR1AHY122M◇◇◇◇1016
	1 800	0,140	0,028	0,084	0,19	180	2500	10 x 20	ECR1AHY182M◇◇◇◇1020
	2 200	0,127	0,024	0,072	0,21	220	2900	10 x 25	ECR1AHY222M◇◇◇◇1025
	2 700	0,103	0,025	0,075	0,21	270	2600	12,5 x 20	ECR1AHY272M◇◇◇◇1220
	3 300	0,092	0,019	0,057	0,23	330	3200	12,5 x 25	ECR1AHY332M◇◇◇◇1225
	4 700	0,071	0,018	0,054	0,25	470	3660	12,5 x 30	ECR1AHY472M◇◇◇◇1230
		0,071	0,021	0,063	0,25	470	3330	16 x 20	ECR1AHY472M◇◇◇◇1620
	5 600	0,064	0,016	0,048	0,27	560	4120	12,5 x 35	ECR1AHY562M◇◇◇◇1235
		0,064	0,017	0,051	0,27	560	3810	16 x 25	ECR1AHY562M◇◇◇◇1625
<b>16</b> (20) 1C	120	1,77	0,400	1,20	0,16	20	450	5 x 11,5	ECR1CHY121M◇◇◇◇0511
	270	0,786	0,170	0,510	0,16	44	700	6,3 x 11,5	ECR1CHY271M◇◇◇◇0611
	470	0,452	0,075	0,230	0,16	76	1200	8 x 11,5	ECR1CHY471M◇◇◇◇0811
	560	0,379	0,059	0,180	0,16	90	1600	8 x 16	ECR1CHY561M◇◇◇◇0816
	680	0,312	0,053	0,160	0,16	109	1700	10 x 12,5	ECR1CHY681M◇◇◇◇1012
	820	0,259	0,041	0,130	0,16	132	1960	8 x 20	ECR1CHY821M◇◇◇◇0820
	1 000	0,212	0,038	0,120	0,16	160	2000	10 x 16	ECR1CHY102M◇◇◇◇1016
	1 500	0,141	0,028	0,084	0,16	240	2500	10 x 20	ECR1CHY152M◇◇◇◇1020
	1 800	0,118	0,024	0,072	0,16	288	2900	10 x 25	ECR1CHY182M◇◇◇◇1025
	2 200	0,109	0,025	0,075	0,18	352	2600	12,5 x 20	ECR1CHY222M◇◇◇◇1220
	2 700	0,088	0,019	0,057	0,18	432	3200	12,5 x 25	ECR1CHY272M◇◇◇◇1225
	3 300	0,080	0,018	0,054	0,20	528	3660	12,5 x 30	ECR1CHY332M◇◇◇◇1230
		0,080	0,021	0,063	0,20	528	3330	16 x 20	ECR1CHY332M◇◇◇◇1620
	3 900	0,068	0,016	0,048	0,20	624	4120	12,5 x 35	ECR1CHY392M◇◇◇◇1235
	4 700	0,062	0,017	0,051	0,22	752	3810	16 x 25	ECR1CHY472M◇◇◇◇1625
<b>25</b> (32) 1E	68	2,74	0,400	1,20	0,14	17	450	5 x 11,5	ECR1EHY680M◇◇◇◇0511
	150	1,24	0,170	0,510	0,14	38	700	6,3 x 11,5	ECR1EHY151M◇◇◇◇0611
	330	0,563	0,075	0,230	0,14	83	1200	8 x 11,5	ECR1EHY331M◇◇◇◇0811
	390	0,476	0,059	0,180	0,14	98	1600	8 x 16	ECR1EHY391M◇◇◇◇0816
	470	0,395	0,053	0,160	0,14	118	1700	10 x 12,5	ECR1EHY471M◇◇◇◇1012
	560	0,332	0,041	0,130	0,14	140	1960	8 x 20	ECR1EHY561M◇◇◇◇0820
	680	0,273	0,038	0,120	0,14	170	2000	10 x 16	ECR1EHY681M◇◇◇◇1016
	1 000	0,186	0,028	0,084	0,14	250	2500	10 x 20	ECR1EHY102M◇◇◇◇1020
	1 200	0,155	0,024	0,072	0,14	300	2900	10 x 25	ECR1EHY122M◇◇◇◇1025
	1 500	0,124	0,025	0,075	0,14	375	2600	12,5 x 20	ECR1EHY152M◇◇◇◇1220
	1 800	0,103	0,019	0,057	0,14	450	3200	12,5 x 25	ECR1EHY182M◇◇◇◇1225
	2 200	0,096	0,018	0,054	0,16	550	3660	12,5 x 30	ECR1EHY222M◇◇◇◇1230
		0,096	0,021	0,063	0,16	550	3330	16 x 20	ECR1EHY222M◇◇◇◇1620
	2 700	0,079	0,016	0,048	0,16	675	4120	12,5 x 35	ECR1EHY272M◇◇◇◇1235
	3 300	0,072	0,017	0,051	0,18	825	3810	16 x 25	ECR1EHY332M◇◇◇◇1625
<b>35</b> (44) 1V	47	3,39	0,400	1,20	0,12	17	450	5 x 11,5	ECR1VHY470M◇◇◇◇0511
	100	1,60	0,170	0,510	0,12	35	700	6,3 x 11,5	ECR1VHY101M◇◇◇◇0611
	180	0,884	0,075	0,230	0,12	63	1200	8 x 11,5	ECR1VHY181M◇◇◇◇0811
	220	0,723	0,059	0,180	0,12	77	1600	8 x 16	ECR1VHY221M◇◇◇◇0816
	270	0,589	0,053	0,160	0,12	95	1700	10 x 12,5	ECR1VHY271M◇◇◇◇1012

RADIAL




RADIAL

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance	Z <sub>max</sub> Max Impedance	Z <sub>max</sub> Max Impedance	tanδ Dissipation Factor	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current	Size øD x L	ORDER CODE
(V)	(µF)	(Ω)	(Ω)	(Ω)		(µA)	(mA <sub>rms</sub> )	(mm)	Details: Page 15
35 (44) 1V	330	0,482	0,041	0,130	0,12	116	1960	8 x 20	ECR1VHY331M◇◇△△0820
	390	0,408	0,038	0,120	0,12	137	2000	10 x 16	ECR1VHY391M◇◇△△1016
	470	0,339	0,038	0,120	0,12	165	2000	10 x 16	ECR1VHY471M◇◇△△1016
	560	0,284	0,028	0,084	0,12	196	2500	10 x 20	ECR1VHY561M◇◇△△1020
	680	0,234	0,024	0,072	0,12	238	2900	10 x 25	ECR1VHY681M◇◇△△1025
	820	0,194	0,025	0,075	0,12	287	2600	12,5 x 20	ECR1VHY821M◇◇△△1220
	1 000	0,159	0,025	0,075	0,12	350	2600	12,5 x 20	ECR1VHY102M◇◇△△1220
	1 200	0,133	0,019	0,057	0,12	420	3200	12,5 x 25	ECR1VHY122M◇◇△△1225
	1 500	0,106	0,018	0,054	0,12	525	3660	12,5 x 30	ECR1VHY152M◇◇△△1230
		0,106	0,021	0,063	0,12	525	3330	16 x 20	ECR1VHY152M◇◇△△1620
1 800	0,088	0,016	0,048	0,12	630	4120	12,5 x 35	ECR1VHY182M◇◇△△1235	
	0,088	0,017	0,051	0,12	630	3810	16 x 25	ECR1VHY182M◇◇△△1625	
50 (63) 1H	27	4,92	0,480	1,50	0,10	14	310	5 x 11,5	ECR1HHY270M◇◇△△0511
	56	2,37	0,220	0,660	0,10	28	500	6,3 x 11,5	ECR1HHY560M◇◇△△0611
	100	1,33	0,120	0,360	0,10	50	950	8 x 11,5	ECR1HHY101M◇◇△△0811
	120	1,106	0,110	0,330	0,10	60	950	8 x 11,5	ECR1HHY121M◇◇△△0811
		1,11	0,082	0,250	0,10	60	1230	8 x 16	ECR1HHY121M◇◇△△0816
	150	0,884	0,073	0,220	0,10	75	1280	10 x 12,5	ECR1HHY151M◇◇△△1012
	180	0,737	0,081	0,240	0,10	90	1700	8 x 16	ECR1HHY181M◇◇△△0816
	220	0,603	0,071	0,210	0,10	110	1700	10 x 12,5	ECR1HHY221M◇◇△△1012
	270	0,493	0,058	0,170	0,10	135	2100	8 x 20	ECR1HHY271M◇◇△△0820
	330	0,402	0,052	0,160	0,10	165	2100	10 x 16	ECR1HHY331M◇◇△△1016
	390	0,340	0,032	0,100	0,10	195	2420	10 x 25	ECR1HHY391M◇◇△△1025
	470	0,282	0,037	0,110	0,10	235	1500	10 x 20	ECR1HHY471M◇◇△△1020
		0,282	0,040	0,120	0,10	235	2200	12,5 x 16	ECR1HHY471M◇◇△△1216
		0,282	0,032	0,100	0,10	235	2300	12,5 x 20	ECR1HHY471M◇◇△△1220
	560	0,238	0,031	0,093	0,10	280	2900	10 x 25	ECR1HHY561M◇◇△△1025
	680	0,195	0,029	0,087	0,10	340	2700	12,5 x 20	ECR1HHY681M◇◇△△1220
		0,195	0,025	0,080	0,10	340	2800	12,5 x 25	ECR1HHY681M◇◇△△1225
	820	0,162	0,023	0,074	0,10	410	3370	12,5 x 30	ECR1HHY821M◇◇△△1230
		0,162	0,026	0,084	0,10	410	3070	16 x 20	ECR1HHY821M◇◇△△1620
	1 000	0,133	0,022	0,066	0,10	500	3000	12,5 x 25	ECR1HHY102M◇◇△△1225
		0,133	0,020	0,060	0,10	500	3500	12,5 x 30	ECR1HHY102M◇◇△△1230
		0,133	0,021	0,067	0,10	500	3810	12,5 x 35	ECR1HHY102M◇◇△△1235
		0,133	0,022	0,070	0,10	500	3510	16 x 25	ECR1HHY102M◇◇△△1625
	1 200	0,111	0,017	0,051	0,10	600	4000	12,5 x 35	ECR1HHY122M◇◇△△1235
		0,111	0,023	0,069	0,10	600	3100	16 x 20	ECR1HHY122M◇◇△△1620
	1 500	0,089	0,019	0,057	0,10	750	4500	12,5 x 40	ECR1HHY152M◇◇△△1240
		0,089	0,018	0,054	0,10	750	3600	16 x 25	ECR1HHY152M◇◇△△1625
0,089		0,029	0,087	0,10	750	3200	18 x 20	ECR1HHY152M◇◇△△1820	
2 200	0,073	0,018	0,054	0,12	1100	4100	16 x 31,5	ECR1HHY222M◇◇△△1631	
	0,073	0,022	0,066	0,12	1100	3700	18 x 25	ECR1HHY222M◇◇△△1825	
2 700	0,059	0,016	0,048	0,12	1350	4400	16 x 35,5	ECR1HHY272M◇◇△△1635	
	0,059	0,014	0,042	0,12	1350	4800	16 x 40	ECR1HHY272M◇◇△△1640	
	0,059	0,019	0,057	0,12	1350	4200	18 x 31,5	ECR1HHY272M◇◇△△1831	
3 300	0,057	0,016	0,048	0,14	1650	4600	18 x 35,5	ECR1HHY332M◇◇△△1835	
3 900	0,048	0,014	0,042	0,14	1950	5000	18 x 40	ECR1HHY392M◇◇△△1840	
63 (79) 1J	18	6,64	0,710	3,20	0,09	12	240	5 x 11,5	ECR1JHY180M◇◇△△0511
	47	2,54	0,280	1,30	0,09	30	420	6,3 x 11,5	ECR1JHY470M◇◇△△0611
	82	1,46	0,180	0,790	0,09	52	720	8 x 11,5	ECR1JHY820M◇◇△△0811
	100	1,20	0,130	0,580	0,09	63	1000	8 x 11,5	ECR1JHY101M◇◇△△0811
	120	0,995	0,095	0,290	0,09	76	1300	8 x 16	ECR1JHY121M◇◇△△0816
		0,995	0,110	0,440	0,09	76	990	10 x 12,5	ECR1JHY121M◇◇△△1012
	150	0,796	0,096	0,430	0,09	95	1200	8 x 20	ECR1JHY151M◇◇△△0820
		0,796	0,080	0,240	0,09	95	1300	10 x 12,5	ECR1JHY151M◇◇△△1012
	180	0,663	0,069	0,210	0,09	114	1600	8 x 20	ECR1JHY181M◇◇△△0820
		0,663	0,076	0,310	0,09	114	1200	10 x 16	ECR1JHY181M◇◇△△1016
	220	0,543	0,058	0,170	0,09	139	1700	10 x 16	ECR1JHY221M◇◇△△1016
	270	0,442	0,056	0,230	0,09	171	1570	10 x 20	ECR1JHY271M◇◇△△1020
		0,442	0,072	0,270	0,09	171	1570	12,5 x 16	ECR1JHY271M◇◇△△1216
	330	0,362	0,042	0,130	0,09	208	2000	10 x 20	ECR1JHY331M◇◇△△1020
		0,362	0,045	0,140	0,09	208	1900	12,5 x 16	ECR1JHY331M◇◇△△1216
	390	0,306	0,035	0,110	0,09	246	2400	10 x 25	ECR1JHY391M◇◇△△1025
		0,306	0,041	0,130	0,09	246	1990	12,5 x 20	ECR1JHY391M◇◇△△1220
	470	0,254	0,033	0,099	0,09	297	2400	12,5 x 20	ECR1JHY471M◇◇△△1220
		0,254	0,031	0,093	0,09	297	2460	12,5 x 25	ECR1JHY471M◇◇△△1225



U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub>	Z <sub>max</sub>	Z <sub>max</sub>	tanδ	I <sub>leak</sub>	I <sub>RAC</sub>	Size	ORDER CODE
		Equivalent Series Resistance	Max Impedance	Max Impedance					
(V)	(µF)	20°C 120Hz	20°C 100kHz	-10°C 100kHz	20°C 120Hz	(µA)	(mA <sub>RMS</sub> )	(mm)	Details: Page 15
<b>63</b> (79) 1J	560	0,213	0,028	0,084	0,09	353	2760	12,5 x 30	ECR1JHY561M◇◇△△1230
		0,213	0,032	0,096	0,09	353	2380	16 x 20	ECR1JHY561M◇◇△△1620
	680	0,176	0,025	0,075	0,09	429	2800	12,5 x 25	ECR1JHY681M◇◇△△1225
		0,176	0,024	0,072	0,09	429	3040	12,5 x 35	ECR1JHY681M◇◇△△1235
	820	0,146	0,022	0,066	0,09	517	3200	12,5 x 30	ECR1JHY821M◇◇△△1230
		0,146	0,025	0,075	0,09	517	2900	16 x 20	ECR1JHY821M◇◇△△1620
	1 000	0,120	0,018	0,054	0,09	630	3500	12,5 x 35	ECR1JHY102M◇◇△△1235
		0,120	0,020	0,060	0,09	630	3200	16 x 25	ECR1JHY102M◇◇△△1625
	1 200	0,100	0,021	0,063	0,09	756	3800	12,5 x 40	ECR1JHY122M◇◇△△1240
		0,100	0,032	0,096	0,09	756	3000	18 x 20	ECR1JHY122M◇◇△△1820
	1 500	0,080	0,020	0,060	0,09	945	3500	16 x 31,5	ECR1JHY152M◇◇△△1631
		0,080	0,024	0,072	0,09	945	3200	18 x 25	ECR1JHY152M◇◇△△1825
	1 800	0,067	0,017	0,051	0,09	1134	3800	16 x 35,5	ECR1JHY182M◇◇△△1635
		0,067	0,020	0,060	0,09	1134	3700	18 x 31,5	ECR1JHY182M◇◇△△1831
	2 200	0,067	0,015	0,045	0,11	1386	4100	16 x 40	ECR1JHY222M◇◇△△1640
		0,067	0,017	0,051	0,11	1386	3900	18 x 35,5	ECR1JHY222M◇◇△△1835
	2 700	0,054	0,015	0,045	0,11	1701	4300	18 x 40	ECR1JHY272M◇◇△△1840
<b>80</b> (100) 1K	12	8,84	1,200	5,40	0,08	10	220	5 x 11,5	ECR1KHY120M◇◇△△0511
	27	3,93	0,460	2,10	0,08	22	370	6,3 x 11,5	ECR1KHY270M◇◇△△0611
	47	2,26	0,290	1,30	0,08	38	620	8 x 11,5	ECR1KHY470M◇◇△△0811
	56	1,90	0,200	0,900	0,08	45	780	8 x 16	ECR1KHY560M◇◇△△0816
	68	1,56	0,170	0,660	0,08	55	780	10 x 12,5	ECR1KHY680M◇◇△△1012
	82	1,30	0,160	0,660	0,08	66	1040	8 x 20	ECR1KHY820M◇◇△△0820
	100	1,07	0,110	0,470	0,08	80	1040	10 x 16	ECR1KHY101M◇◇△△1016
	150	0,707	0,084	0,340	0,08	120	1430	10 x 20	ECR1KHY151M◇◇△△1020
		0,707	0,110	0,340	0,08	120	1430	12,5 x 16	ECR1KHY151M◇◇△△1216
	180	0,589	0,069	0,280	0,08	144	1620	10 x 25	ECR1KHY181M◇◇△△1025
	220	0,482	0,062	0,180	0,08	176	1750	12,5 x 20	ECR1KHY221M◇◇△△1220
	270	0,393	0,047	0,140	0,08	216	2210	12,5 x 25	ECR1KHY271M◇◇△△1225
	330	0,322	0,042	0,130	0,08	264	2400	12,5 x 30	ECR1KHY331M◇◇△△1230
		0,322	0,048	0,150	0,08	264	1950	16 x 20	ECR1KHY331M◇◇△△1620
	390	0,272	0,036	0,110	0,08	312	2600	12,5 x 35	ECR1KHY391M◇◇△△1235
	470	0,226	0,032	0,095	0,08	376	2860	12,5 x 40	ECR1KHY471M◇◇△△1240
		0,226	0,038	0,120	0,08	376	2430	16 x 25	ECR1KHY471M◇◇△△1625
		0,226	0,045	0,140	0,08	376	2270	18 x 20	ECR1KHY471M◇◇△△1820
	560	0,189	0,032	0,095	0,08	448	2640	16 x 31,5	ECR1KHY561M◇◇△△1631
	680	0,156	0,029	0,086	0,08	544	2860	16 x 35,5	ECR1KHY681M◇◇△△1635
		0,156	0,036	0,110	0,08	544	2500	18 x 25	ECR1KHY681M◇◇△△1825
820	0,129	0,027	0,081	0,08	656	3510	16 x 40	ECR1KHY821M◇◇△△1640	
	0,129	0,030	0,090	0,08	656	2860	18 x 31,5	ECR1KHY821M◇◇△△1831	
1 000	0,106	0,027	0,081	0,08	800	3510	18 x 35,5	ECR1KHY102M◇◇△△1835	
1 200	0,088	0,026	0,076	0,08	960	3860	18 x 40	ECR1KHY122M◇◇△△1840	
<b>100</b> (125) 2A	8,2	13,0	1,20	5,40	0,08	9	220	5 x 11,5	ECR2AHY82M◇◇△△0511
	18	5,90	0,460	2,10	0,08	18	370	6,3 x 11,5	ECR2AHY180M◇◇△△0611
	33	3,22	0,290	1,30	0,08	33	620	8 x 11,5	ECR2AHY330M◇◇△△0811
	47	2,26	0,200	0,900	0,08	47	780	8 x 16	ECR2AHY470M◇◇△△0816
	56	1,90	0,170	0,660	0,08	56	780	10 x 12,5	ECR2AHY560M◇◇△△1012
	68	1,56	0,160	0,660	0,08	68	1040	8 x 20	ECR2AHY680M◇◇△△0820
	82	1,30	0,110	0,470	0,08	82	1040	10 x 16	ECR2AHY820M◇◇△△1016
	100	1,07	0,084	0,340	0,08	100	1430	10 x 20	ECR2AHY101M◇◇△△1020
		1,07	0,110	0,340	0,08	100	1430	12,5 x 16	ECR2AHY101M◇◇△△1216
	120	0,884	0,069	0,280	0,08	120	1620	10 x 25	ECR2AHY121M◇◇△△1025
	150	0,707	0,062	0,180	0,08	150	1750	12,5 x 20	ECR2AHY151M◇◇△△1220
	220	0,482	0,047	0,140	0,08	220	2210	12,5 x 25	ECR2AHY221M◇◇△△1225
	270	0,393	0,042	0,130	0,08	270	2400	12,5 x 30	ECR2AHY271M◇◇△△1230
		0,393	0,048	0,150	0,08	270	1950	16 x 20	ECR2AHY271M◇◇△△1620
	330	0,322	0,036	0,110	0,08	330	2600	12,5 x 35	ECR2AHY331M◇◇△△1235
	390	0,272	0,032	0,095	0,08	390	2860	12,5 x 40	ECR2AHY391M◇◇△△1240
		0,272	0,038	0,120	0,08	390	2430	16 x 25	ECR2AHY391M◇◇△△1625
	470	0,226	0,032	0,095	0,08	470	2640	16 x 31,5	ECR2AHY471M◇◇△△1631
		0,226	0,036	0,110	0,08	470	2500	18 x 25	ECR2AHY471M◇◇△△1825
	560	0,189	0,029	0,086	0,08	560	2860	16 x 35,5	ECR2AHY561M◇◇△△1635
		0,189	0,030	0,090	0,08	560	2860	18 x 31,5	ECR2AHY561M◇◇△△1831
680	0,156	0,027	0,081	0,08	680	3510	16 x 40	ECR2AHY681M◇◇△△1640	
	0,156	0,027	0,081	0,08	680	3510	18 x 35,5	ECR2AHY681M◇◇△△1835	
820	0,129	0,026	0,076	0,08	820	3860	18 x 40	ECR2AHY821M◇◇△△1840	

RADIAL

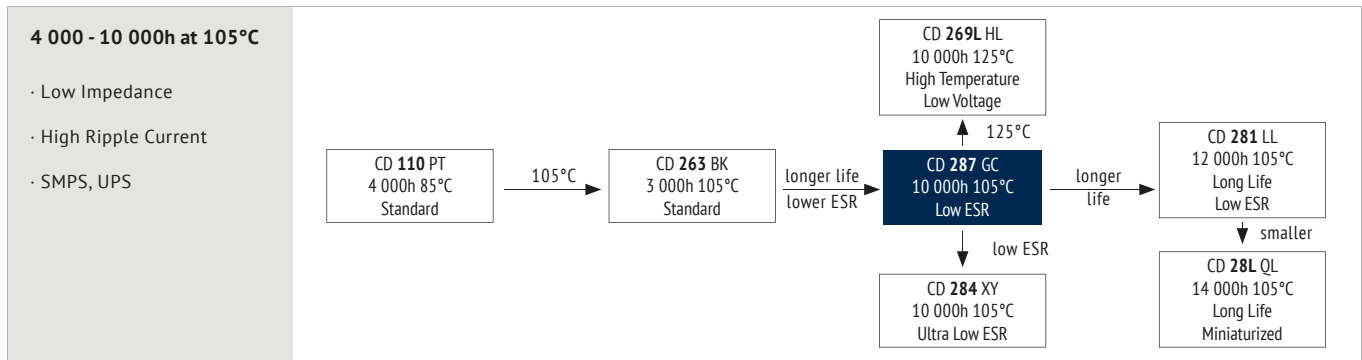

**ITEM CHARACTERISTICS**

Operating Temperature Range (°C)	-55 ~ +105	
Voltage Range (V)	6,3 ~ 100	
Capacitance Range (µF)	0,47 ~ 15 000	
Capacitance Tolerance (20°C, 120Hz)	± 20%	
Leakage Current (µA)	After 2 minutes at 20°C application of rated voltage, leakage current is not more than specified in table.	
Stability at Low Temperature (Impedance Ratio at 120Hz)	Rated Voltage (V)	6,3 ~ 100
	$Z_{-55^{\circ}\text{C}} / Z_{+20^{\circ}\text{C}}$	3

**!** The usage at lower temperatures than indicated may be possible. Please contact the Jianghai Europe sales office for approval.


ITEM	USEFUL LIFE		LOAD LIFE	ENDURANCE TEST	SHELF LIFE	
Lifetime	$\emptyset \leq 6,3$ : 4 000h $\emptyset 8-10$ : 6 000h $\emptyset \geq 12,5$ : 10 000h	$\emptyset \geq 8$ : > 250 000h	$\emptyset \leq 6,3$ : 2 000h $\emptyset 8-10$ : 3 000h $\emptyset \geq 12,5$ : 5 000h	$\emptyset \leq 6,3$ : 3 000h $\emptyset 8-10$ : 5 000h $\emptyset \geq 12,5$ : 7 000h	1 000h	
Leakage Current	Not more than specified value		Not more than specified value	Not more than specified value	Not more than specified value	
Capacitance Change	Within ± 30% of initial value		Within ± 20% of initial value	Within ± 20% of initial value	Within ± 20% of initial value	
Dissipation Factor	Not more than 300% of specified value		Not more than 200% of specified value	Not more than 200% of specified value	Not more than 200% of specified value	
Condition: Applied Voltage Applied Current Applied Temperature	$U_R$ $I_R$ 105°C	$U_R$ $1,4 \times I_R$ 40°C	$U_R$ $I_R$ 105°C	$U_R$ $I_R = 0$ 105°C IEC 60384	$U_R = 0$ $I_R = 0$ 105°C	After test: $U_R$ to be applied for 30 min > 24h before measurement

**MULTIPLIER FOR RIPPLE CURRENT (FREQUENCY COEFFICIENT)**

Capacitance (µF)	Frequency			
	120Hz	1kHz	10kHz	100kHz
0,47 ~ 4,7	0,40	0,68	0,83	1,00
5,6 ~ 47	0,50	0,76	0,87	1,00
56 ~ 270	0,70	0,85	0,93	1,00
330 ~ 1 000	0,80	0,93	0,98	1,00
1 200 ~ 15 000	0,90	0,95	1,00	1,00

Multipliers for typical operating conditions.

**MULTIPLIER FOR LIFETIME (LIFETIME DIAGRAM)**

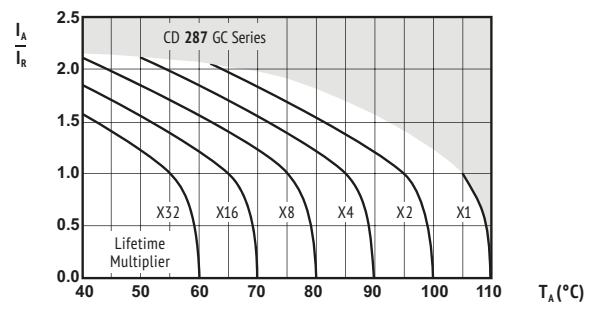

$I_A$  = actual ripple current at 100kHz,  
 $I_R$  = rated ripple current at 100kHz, 105°C  
 Multiplier of Useful Life as a function of ambient temperature & ripple current load

**ENVIRONMENTAL**

The products are RoHS, WEEE and REACH compliant. The detailed version please see separate "Environmental Certificates" document or [www.jianghai-europe.com](http://www.jianghai-europe.com)

**! SAFETY FACTOR**

This diagram includes a safety margin. In many cases the allowed current capability/lifetime may be increased. For details and approvals please contact the Jianghai Europe sales office.





U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance	Z <sub>max</sub> Max Impedance		tanδ Dissipation Factor	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current	Size øD x L	ORDER CODE
			20°C 120kHz	20°C 100kHz					
(V)	(µF)	(Ω)	(Ω)	(Ω)		(µA)	(mArms)	(mm)	Details: Page 15
<b>6,3</b> <b>(7,2)</b> <b>0J</b>	100	2,92	0,650	1,30	0,22	13	175	5 x 11,5	ECR0JGC101M◇◇◇◇0511
	150	1,95	0,460	0,920	0,22	19	235	5 x 15	ECR0JGC151M◇◇◇◇0515
	220	1,33	0,300	0,600	0,22	28	290	6,3 x 11,5	ECR0JGC221M◇◇◇◇0611
	330	0,885	0,200	0,400	0,22	42	400	6,3 x 15	ECR0JGC331M◇◇◇◇0615
	470	0,621	0,170	0,340	0,22	60	488	8 x 11,5	ECR0JGC471M◇◇◇◇0811
	680	0,430	0,130	0,260	0,22	86	617	8 x 16	ECR0JGC681M◇◇◇◇0816
		0,430	0,120	0,240	0,22	86	613	10 x 12,5	ECR0JGC681M◇◇◇◇1012
	820	0,356	0,095	0,190	0,22	104	734	10 x 16	ECR0JGC821M◇◇◇◇1016
	1 000	0,292	0,095	0,190	0,22	126	800	8 x 20	ECR0JGC102M◇◇◇◇0820
	1 200	0,244	0,065	0,130	0,22	152	1010	10 x 20	ECR0JGC122M◇◇◇◇1020
		0,244	0,065	0,130	0,22	152	1010	12,5 x 15	ECR0JGC122M◇◇◇◇1215
	1 500	0,195	0,055	0,110	0,22	189	1190	10 x 25	ECR0JGC152M◇◇◇◇1025
	2 200	0,145	0,045	0,090	0,24	278	1440	10 x 30	ECR0JGC222M◇◇◇◇1030
		0,145	0,042	0,084	0,24	278	1400	12,5 x 20	ECR0JGC222M◇◇◇◇1220
	2 700	0,118	0,038	0,076	0,24	341	1690	12,5 x 25	ECR0JGC272M◇◇◇◇1225
		0,118	0,046	0,092	0,24	341	1310	16 x 15	ECR0JGC272M◇◇◇◇1615
	3 300	0,105	0,043	0,086	0,26	416	1460	18 x 15	ECR0JGC332M◇◇◇◇1815
	3 900	0,089	0,032	0,064	0,26	492	1950	12,5 x 30	ECR0JGC392M◇◇◇◇1230
	4 700	0,080	0,028	0,056	0,28	593	2220	12,5 x 35	ECR0JGC472M◇◇◇◇1235
		0,080	0,034	0,068	0,28	593	1660	16 x 20	ECR0JGC472M◇◇◇◇1620
5 600	0,072	0,026	0,052	0,30	706	2390	12,5 x 40	ECR0JGC562M◇◇◇◇1240	
	0,072	0,028	0,056	0,30	706	2070	16 x 25	ECR0JGC562M◇◇◇◇1625	
	0,072	0,030	0,060	0,30	706	1850	18 x 20	ECR0JGC562M◇◇◇◇1820	
6 800	0,063	0,025	0,050	0,32	857	2350	16 x 31,5	ECR0JGC682M◇◇◇◇1631	
	0,063	0,027	0,054	0,32	857	2120	18 x 25	ECR0JGC682M◇◇◇◇1825	
8 200	0,059	0,022	0,044	0,36	1034	2550	16 x 35,5	ECR0JGC822M◇◇◇◇1635	
10 000	0,054	0,023	0,046	0,40	1260	2410	18 x 31,5	ECR0JGC103M◇◇◇◇1831	
12 000	0,049	0,020	0,040	0,44	1512	2970	16 x 40	ECR0JGC123M◇◇◇◇1640	
	0,049	0,020	0,040	0,44	1512	2680	18 x 35,5	ECR0JGC123M◇◇◇◇1835	
15 000	0,045	0,019	0,038	0,50	1890	3010	18 x 40	ECR0JGC153M◇◇◇◇1840	
<b>10</b> <b>(13)</b> <b>1A</b>	82	3,08	0,650	1,30	0,19	17	175	5 x 11,5	ECR1AGC820M◇◇◇◇0511
	100	2,53	0,460	0,920	0,19	20	235	5 x 15	ECR1AGC101M◇◇◇◇0515
	180	1,41	0,300	0,600	0,19	36	290	6,3 x 11,5	ECR1AGC181M◇◇◇◇0611
	220	1,15	0,200	0,400	0,19	44	400	6,3 x 15	ECR1AGC221M◇◇◇◇0615
	330	0,764	0,170	0,340	0,19	66	488	8 x 11,5	ECR1AGC331M◇◇◇◇0811
	470	0,537	0,130	0,260	0,19	94	617	8 x 16	ECR1AGC471M◇◇◇◇0816
		0,537	0,120	0,240	0,19	94	613	10 x 12,5	ECR1AGC471M◇◇◇◇1012
	560	0,450	0,095	0,190	0,19	112	734	10 x 16	ECR1AGC561M◇◇◇◇1016
	680	0,371	0,095	0,190	0,19	136	800	8 x 20	ECR1AGC681M◇◇◇◇0820
	1 000	0,252	0,065	0,130	0,19	200	1010	10 x 20	ECR1AGC102M◇◇◇◇1020
		0,252	0,065	0,130	0,19	200	1010	12,5 x 15	ECR1AGC102M◇◇◇◇1215
	1 200	0,210	0,055	0,110	0,19	240	1190	10 x 25	ECR1AGC122M◇◇◇◇1025
	1 500	0,168	0,045	0,090	0,19	300	1440	10 x 30	ECR1AGC152M◇◇◇◇1030
	1 800	0,140	0,042	0,084	0,19	360	1400	12,5 x 20	ECR1AGC182M◇◇◇◇1220
		0,140	0,046	0,092	0,19	360	1310	16 x 15	ECR1AGC182M◇◇◇◇1615
	2 200	0,127	0,038	0,076	0,21	440	1690	12,5 x 25	ECR1AGC222M◇◇◇◇1225
		0,127	0,043	0,086	0,21	440	1460	18 x 15	ECR1AGC222M◇◇◇◇1815
	2 700	0,104	0,032	0,064	0,21	540	1950	12,5 x 30	ECR1AGC272M◇◇◇◇1230
	3 300	0,093	0,028	0,056	0,23	660	2220	12,5 x 35	ECR1AGC332M◇◇◇◇1235
		0,093	0,034	0,068	0,23	660	1660	16 x 20	ECR1AGC332M◇◇◇◇1620
3 900	0,079	0,026	0,052	0,23	780	2390	12,5 x 40	ECR1AGC392M◇◇◇◇1240	
	0,079	0,028	0,056	0,23	780	2070	16 x 25	ECR1AGC392M◇◇◇◇1625	
	0,079	0,030	0,060	0,23	780	1850	18 x 20	ECR1AGC392M◇◇◇◇1820	
4 700	0,071	0,027	0,054	0,25	940	2120	18 x 25	ECR1AGC472M◇◇◇◇1825	
5 600	0,064	0,025	0,050	0,27	1120	2350	16 x 31,5	ECR1AGC562M◇◇◇◇1631	
6 800	0,057	0,022	0,044	0,29	1360	2550	16 x 35,5	ECR1AGC682M◇◇◇◇1635	
	0,057	0,023	0,046	0,29	1360	2410	18 x 31,5	ECR1AGC682M◇◇◇◇1831	
8 200	0,054	0,020	0,040	0,33	1640	2970	16 x 40	ECR1AGC822M◇◇◇◇1640	
	0,054	0,020	0,040	0,33	1640	2680	18 x 35,5	ECR1AGC822M◇◇◇◇1835	
10 000	0,050	0,019	0,038	0,37	2000	3010	18 x 40	ECR1AGC103M◇◇◇◇1840	
<b>16</b> <b>(20)</b> <b>1C</b>	56	3,80	0,650	1,30	0,16	18	175	5 x 11,5	ECR1CGC560M◇◇◇◇0511
	82	2,59	0,460	0,920	0,16	27	235	5 x 15	ECR1CGC820M◇◇◇◇0515
	120	1,77	0,300	0,600	0,16	39	290	6,3 x 11,5	ECR1CGC121M◇◇◇◇0611
	180	1,18	0,200	0,400	0,16	58	400	6,3 x 15	ECR1CGC181M◇◇◇◇0615
	270	0,786	0,170	0,340	0,16	87	501	8 x 11,5	ECR1CGC271M◇◇◇◇0811

**RADIAL**

&gt;&gt;

RADIAL

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub>	Z <sub>max</sub>	Z <sub>max</sub>	tanδ Dissipation Factor	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current	Size øD x L	ORDER CODE
		Equivalent Series Resistance	Max Impedance	Max Impedance					
(V)	(µF)	(Ω)	(Ω)	(Ω)		(µA)	(mA <sub>RMS</sub> )	(mm)	Details: Page 15
16 (20) 1C	330	0,644	0,130	0,260	0,16	106	575	8 x 16	ECR1CGC331M $\diamond\diamond\Delta\Delta$ 0816
		0,644	0,120	0,240	0,16	106	625	10 x 12,5	ECR1CGC331M $\diamond\diamond\Delta\Delta$ 1012
	390	0,545	0,095	0,190	0,16	125	795	10 x 16	ECR1CGC391M $\diamond\diamond\Delta\Delta$ 1016
		0,452	0,095	0,190	0,16	151	760	8 x 20	ECR1CGC471M $\diamond\diamond\Delta\Delta$ 0820
	680	0,313	0,065	0,130	0,16	218	1010	10 x 20	ECR1CGC681M $\diamond\diamond\Delta\Delta$ 1020
		0,313	0,065	0,130	0,16	218	1010	12,5 x 15	ECR1CGC681M $\diamond\diamond\Delta\Delta$ 1215
	820	0,259	0,055	0,110	0,16	263	1190	10 x 25	ECR1CGC821M $\diamond\diamond\Delta\Delta$ 1025
		1 200	0,177	0,045	0,090	0,16	384	1430	10 x 30
	1 500		0,177	0,042	0,084	0,16	384	1400	12,5 x 20
		0,142	0,038	0,076	0,16	480	1690	12,5 x 25	ECR1CGC152M $\diamond\diamond\Delta\Delta$ 1225
		0,142	0,046	0,092	0,16	480	1340	16 x 15	ECR1CGC152M $\diamond\diamond\Delta\Delta$ 1615
		0,142	0,043	0,086	0,16	480	1490	18 x 15	ECR1CGC152M $\diamond\diamond\Delta\Delta$ 1815
	2 200	0,109	0,032	0,064	0,18	704	1950	12,5 x 30	ECR1CGC222M $\diamond\diamond\Delta\Delta$ 1230
		0,109	0,034	0,068	0,18	704	1730	16 x 20	ECR1CGC222M $\diamond\diamond\Delta\Delta$ 1620
	2 700	0,089	0,028	0,056	0,18	864	2200	12,5 x 35	ECR1CGC272M $\diamond\diamond\Delta\Delta$ 1235
		0,089	0,028	0,056	0,18	864	2070	16 x 25	ECR1CGC272M $\diamond\diamond\Delta\Delta$ 1625
		0,089	0,030	0,060	0,18	864	1870	18 x 20	ECR1CGC272M $\diamond\diamond\Delta\Delta$ 1820
	3 300	0,081	0,026	0,052	0,20	1056	2390	12,5 x 40	ECR1CGC332M $\diamond\diamond\Delta\Delta$ 1240
		3 900	0,069	0,025	0,050	0,20	1248	2350	16 x 31,5
	0,069		0,027	0,054	0,20	1248	2160	18 x 25	ECR1CGC392M $\diamond\diamond\Delta\Delta$ 1825
4 700	0,063	0,022	0,044	0,22	1504	2550	16 x 35,5	ECR1CGC472M $\diamond\diamond\Delta\Delta$ 1635	
	0,063	0,023	0,046	0,22	1504	2450	18 x 31,5	ECR1CGC472M $\diamond\diamond\Delta\Delta$ 1831	
5 600	0,057	0,020	0,040	0,24	1792	2900	16 x 40	ECR1CGC562M $\diamond\diamond\Delta\Delta$ 1640	
6 800	0,051	0,020	0,040	0,26	2176	2730	18 x 35,5	ECR1CGC682M $\diamond\diamond\Delta\Delta$ 1835	
8 200	0,049	0,019	0,038	0,30	2624	3060	18 x 40	ECR1CGC822M $\diamond\diamond\Delta\Delta$ 1840	
25 (32) 1E	39	4,77	0,650	1,30	0,14	20	175	5 x 11,5	ECR1EGC390M $\diamond\diamond\Delta\Delta$ 0511
	56	3,32	0,460	0,920	0,14	28	235	5 x 15	ECR1EGC560M $\diamond\diamond\Delta\Delta$ 0515
	82	2,27	0,300	0,600	0,14	41	290	6,3 x 11,5	ECR1EGC820M $\diamond\diamond\Delta\Delta$ 0611
	120	1,55	0,200	0,400	0,14	60	400	6,3 x 15	ECR1EGC121M $\diamond\diamond\Delta\Delta$ 0615
	180	1,04	0,170	0,340	0,14	90	503	8 x 11,5	ECR1EGC181M $\diamond\diamond\Delta\Delta$ 0811
		0,845	0,130	0,260	0,14	110	575	8 x 16	ECR1EGC221M $\diamond\diamond\Delta\Delta$ 0816
	220	0,845	0,120	0,240	0,14	110	629	10 x 12,5	ECR1EGC221M $\diamond\diamond\Delta\Delta$ 1012
		0,688	0,095	0,190	0,14	135	795	10 x 16	ECR1EGC271M $\diamond\diamond\Delta\Delta$ 1016
	330	0,563	0,095	0,190	0,14	165	751	8 x 20	ECR1EGC331M $\diamond\diamond\Delta\Delta$ 0820
	470	0,396	0,065	0,130	0,14	235	1010	10 x 20	ECR1EGC471M $\diamond\diamond\Delta\Delta$ 1020
		0,396	0,065	0,130	0,14	235	1010	12,5 x 15	ECR1EGC471M $\diamond\diamond\Delta\Delta$ 1215
	560	0,332	0,055	0,110	0,14	280	1190	10 x 25	ECR1EGC561M $\diamond\diamond\Delta\Delta$ 1025
	820	0,227	0,045	0,090	0,14	410	1440	10 x 30	ECR1EGC821M $\diamond\diamond\Delta\Delta$ 1030
		0,227	0,042	0,084	0,14	410	1400	12,5 x 20	ECR1EGC821M $\diamond\diamond\Delta\Delta$ 1220
		0,227	0,046	0,092	0,14	410	1360	16 x 15	ECR1EGC821M $\diamond\diamond\Delta\Delta$ 1615
	1 000	0,186	0,038	0,076	0,14	500	1690	12,5 x 25	ECR1EGC102M $\diamond\diamond\Delta\Delta$ 1225
	1 200	0,155	0,043	0,086	0,14	600	1500	18 x 15	ECR1EGC122M $\diamond\diamond\Delta\Delta$ 1815
	1 500	0,124	0,032	0,064	0,14	750	1950	12,5 x 30	ECR1EGC152M $\diamond\diamond\Delta\Delta$ 1230
		0,124	0,034	0,068	0,14	750	1730	16 x 20	ECR1EGC152M $\diamond\diamond\Delta\Delta$ 1620
	1 800	0,104	0,028	0,056	0,14	900	2200	12,5 x 35	ECR1EGC182M $\diamond\diamond\Delta\Delta$ 1235
0,104		0,028	0,056	0,14	900	2070	16 x 25	ECR1EGC182M $\diamond\diamond\Delta\Delta$ 1625	
0,104		0,030	0,060	0,14	900	1890	18 x 20	ECR1EGC182M $\diamond\diamond\Delta\Delta$ 1820	
2 200	0,097	0,026	0,052	0,16	1100	2390	12,5 x 40	ECR1EGC222M $\diamond\diamond\Delta\Delta$ 1240	
2 700	0,079	0,025	0,050	0,16	1350	2350	16 x 31,5	ECR1EGC272M $\diamond\diamond\Delta\Delta$ 1631	
	0,079	0,027	0,054	0,16	1350	2180	18 x 25	ECR1EGC272M $\diamond\diamond\Delta\Delta$ 1825	
3 300	0,073	0,022	0,044	0,18	1650	2550	16 x 35,5	ECR1EGC332M $\diamond\diamond\Delta\Delta$ 1635	
	0,073	0,023	0,046	0,18	1650	2470	18 x 31,5	ECR1EGC332M $\diamond\diamond\Delta\Delta$ 1831	
3 900	0,062	0,020	0,040	0,18	1950	2900	16 x 40	ECR1EGC392M $\diamond\diamond\Delta\Delta$ 1640	
	0,062	0,020	0,040	0,18	1950	2740	18 x 35,5	ECR1EGC392M $\diamond\diamond\Delta\Delta$ 1835	
4 700	0,057	0,019	0,038	0,20	2350	3070	18 x 40	ECR1EGC472M $\diamond\diamond\Delta\Delta$ 1840	
35 (44) 1V	27	5,90	0,650	1,30	0,12	19	175	5 x 11,5	ECR1VGC270M $\diamond\diamond\Delta\Delta$ 0511
	39	4,09	0,460	0,920	0,12	28	235	5 x 15	ECR1VGC390M $\diamond\diamond\Delta\Delta$ 0515
	56	2,85	0,300	0,600	0,12	40	290	6,3 x 11,5	ECR1VGC560M $\diamond\diamond\Delta\Delta$ 0611
	82	1,95	0,200	0,400	0,12	58	400	6,3 x 15	ECR1VGC820M $\diamond\diamond\Delta\Delta$ 0615
	120	1,33	0,170	0,340	0,12	84	501	8 x 11,5	ECR1VGC121M $\diamond\diamond\Delta\Delta$ 0811
	150	1,07	0,120	0,240	0,12	105	625	10 x 12,5	ECR1VGC151M $\diamond\diamond\Delta\Delta$ 1012
		0,885	0,130	0,260	0,12	126	575	8 x 16	ECR1VGC181M $\diamond\diamond\Delta\Delta$ 0816
	180	0,885	0,095	0,190	0,12	126	795	10 x 16	ECR1VGC181M $\diamond\diamond\Delta\Delta$ 1016
		0,724	0,095	0,190	0,12	154	760	8 x 20	ECR1VGC221M $\diamond\diamond\Delta\Delta$ 0820
	330	0,483	0,065	0,130	0,12	231	1010	10 x 20	ECR1VGC331M $\diamond\diamond\Delta\Delta$ 1020
		0,483	0,065	0,130	0,12	231	1010	12,5 x 15	ECR1VGC331M $\diamond\diamond\Delta\Delta$ 1215



U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance  (μF)	ESR <sub>max</sub> Equivalent Series Resistance		Z <sub>max</sub> Max Impedance		tanδ Dissipation Factor	I <sub>leak</sub> Leakage Current  (μA)	I <sub>RAC</sub> Rated Ripple Current  (mArms)	Size øD x L  (mm)	ORDER CODE  ◇◇ = pin style & length △△ = pitch code  Details: Page 15
		20°C 120kHz		20°C 100kHz						
		(Ω)	(Ω)	(Ω)	(Ω)					
35 (44) 1V	390	0,409	0,055	0,110	0,12	273	1190	10 x 25	ECR1VGC391M◇◇△△1025	
	560	0,285	0,045	0,090	0,12	392	1450	10 x 30	ECR1VGC561M◇◇△△1030	
		0,285	0,042	0,084	0,12	392	1400	12,5 x 20	ECR1VGC561M◇◇△△1220	
	680	0,285	0,046	0,092	0,12	392	1360	16 x 15	ECR1VGC561M◇◇△△1615	
		0,235	0,038	0,076	0,12	476	1690	12,5 x 25	ECR1VGC681M◇◇△△1225	
	1 000	0,235	0,043	0,086	0,12	476	1520	18 x 15	ECR1VGC681M◇◇△△1815	
		0,160	0,032	0,064	0,12	700	1950	12,5 x 30	ECR1VGC102M◇◇△△1230	
	1 200	0,160	0,034	0,068	0,12	700	1730	16 x 20	ECR1VGC102M◇◇△△1620	
		0,133	0,028	0,056	0,12	840	2200	12,5 x 35	ECR1VGC122M◇◇△△1235	
	1 500	0,133	0,028	0,056	0,12	840	2070	16 x 25	ECR1VGC122M◇◇△△1625	
		0,133	0,030	0,060	0,12	840	1900	18 x 20	ECR1VGC122M◇◇△△1820	
	1 800	0,107	0,026	0,052	0,12	1050	2390	12,5 x 40	ECR1VGC152M◇◇△△1240	
		0,089	0,025	0,050	0,12	1260	2350	16 x 31,5	ECR1VGC182M◇◇△△1631	
	2 200	0,089	0,027	0,054	0,12	1260	2200	18 x 25	ECR1VGC182M◇◇△△1825	
		0,085	0,022	0,044	0,14	1540	2550	16 x 35,5	ECR1VGC222M◇◇△△1635	
	2 700	0,085	0,023	0,046	0,14	1540	2490	18 x 31,5	ECR1VGC222M◇◇△△1831	
		0,069	0,020	0,040	0,14	1890	2900	16 x 40	ECR1VGC272M◇◇△△1640	
	3 300	0,069	0,020	0,040	0,14	1890	2770	18 x 35,5	ECR1VGC272M◇◇△△1835	
0,065		0,019	0,038	0,16	2310	3110	18 x 40	ECR1VGC332M◇◇△△1840		
50 (63) 1H	0,47	283	3,90	7,80	0,10	3	22	5 x 11,5	ECR1HGC47M◇◇△△0511	
	1,0	133	3,50	7,00	0,10	3	36	5 x 11,5	ECR1HGC010M◇◇△△0511	
	2,2	60,4	3,00	6,00	0,10	3	54	5 x 11,5	ECR1HGC2R2M◇◇△△0511	
	3,3	40,3	2,60	5,20	0,10	4	63	5 x 11,5	ECR1HGC3R3M◇◇△△0511	
	4,7	28,3	2,20	4,40	0,10	5	75	5 x 11,5	ECR1HGC4R7M◇◇△△0511	
	10	13,3	1,40	2,80	0,10	10	110	5 x 11,5	ECR1HGC100M◇◇△△0511	
	18	7,38	0,950	1,90	0,10	18	120	5 x 11,5	ECR1HGC180M◇◇△△0511	
	27	4,92	0,550	1,10	0,10	27	135	5 x 15	ECR1HGC270M◇◇△△0515	
	39	3,41	0,360	0,720	0,10	39	148	6,3 x 11,5	ECR1HGC390M◇◇△△0611	
	56	2,37	0,280	0,560	0,10	56	153	6,3 x 15	ECR1HGC560M◇◇△△0615	
	68	1,96	0,200	0,400	0,10	68	360	8 x 11,5	ECR1HGC680M◇◇△△0811	
	82	1,62	0,180	0,360	0,10	82	460	8 x 16	ECR1HGC820M◇◇△△0816	
		1,62	0,180	0,360	0,10	82	443	10 x 12,5	ECR1HGC820M◇◇△△1012	
	100	1,33	0,150	0,300	0,10	100	553	10 x 16	ECR1HGC101M◇◇△△1016	
	120	1,11	0,130	0,260	0,10	120	670	8 x 20	ECR1HGC121M◇◇△△0820	
	180	0,737	0,095	0,190	0,10	180	676	10 x 20	ECR1HGC181M◇◇△△1020	
		0,737	0,105	0,210	0,10	180	745	12,5 x 15	ECR1HGC181M◇◇△△1215	
	220	0,603	0,080	0,160	0,10	220	876	10 x 25	ECR1HGC221M◇◇△△1025	
	330	0,402	0,065	0,130	0,10	330	1010	10 x 30	ECR1HGC331M◇◇△△1030	
		0,402	0,070	0,140	0,10	330	979	12,5 x 20	ECR1HGC331M◇◇△△1220	
		0,402	0,075	0,150	0,10	330	982	16 x 15	ECR1HGC331M◇◇△△1615	
	470	0,283	0,054	0,108	0,10	470	1180	12,5 x 25	ECR1HGC471M◇◇△△1225	
		0,283	0,058	0,116	0,10	470	1180	18 x 15	ECR1HGC471M◇◇△△1815	
	560	0,237	0,050	0,100	0,10	560	1310	12,5 x 30	ECR1HGC561M◇◇△△1230	
	680	0,196	0,046	0,092	0,10	680	1470	12,5 x 35	ECR1HGC681M◇◇△△1235	
		0,196	0,050	0,100	0,10	680	1210	16 x 20	ECR1HGC681M◇◇△△1620	
		0,162	0,044	0,088	0,10	820	1590	12,5 x 40	ECR1HGC821M◇◇△△1240	
	820	0,162	0,048	0,096	0,10	820	1490	16 x 25	ECR1HGC821M◇◇△△1625	
0,162		0,046	0,092	0,10	820	1450	18 x 20	ECR1HGC821M◇◇△△1820		
0,133		0,040	0,080	0,10	1000	1890	16 x 31,5	ECR1HGC102M◇◇△△1631		
1 000	0,133	0,040	0,080	0,10	1000	1720	18 x 25	ECR1HGC102M◇◇△△1825		
	0,111	0,032	0,064	0,10	1200	2140	16 x 35,5	ECR1HGC122M◇◇△△1635		
1 500	0,089	0,026	0,052	0,10	1500	2410	16 x 40	ECR1HGC152M◇◇△△1640		
	0,089	0,026	0,052	0,10	1500	1970	18 x 31,5	ECR1HGC152M◇◇△△1831		
1 800	0,074	0,025	0,050	0,10	1800	2310	18 x 35,5	ECR1HGC182M◇◇△△1835		
2 200	0,073	0,024	0,048	0,12	2200	2530	18 x 40	ECR1HGC222M◇◇△△1840		
63 (79) 1J	12	9,96	1,20	3,60	0,09	16	120	5 x 11,5	ECR1JGC120M◇◇△△0511	
	18	6,64	0,850	2,60	0,09	23	135	5 x 15	ECR1JGC180M◇◇△△0515	
	27	4,43	0,550	1,70	0,09	34	148	6,3 x 11,5	ECR1JGC270M◇◇△△0611	
	39	3,07	0,380	1,10	0,09	50	153	6,3 x 15	ECR1JGC390M◇◇△△0615	
	47	2,55	0,320	0,960	0,09	60	360	8 x 11,5	ECR1JGC470M◇◇△△0811	
	56	2,14	0,230	0,690	0,09	71	448	10 x 12,5	ECR1JGC560M◇◇△△1012	
	68	1,76	0,240	0,720	0,09	86	469	8 x 16	ECR1JGC680M◇◇△△0816	
		1,76	0,170	0,510	0,09	86	553	10 x 16	ECR1JGC680M◇◇△△1016	
	82	1,46	0,170	0,510	0,09	104	682	8 x 20	ECR1JGC820M◇◇△△0820	
	120	0,995	0,120	0,360	0,09	152	676	10 x 20	ECR1JGC121M◇◇△△1020	

RADIAL


>>

RADIAL

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub>	Z <sub>max</sub>	Z <sub>max</sub>	tanδ	I <sub>leak</sub>	I <sub>RAC</sub>	Size	ORDER CODE
		Equivalent Series Resistance	Max Impedance	Max Impedance					
(V)	(µF)	20°C 120Hz (Ω)	20°C 100kHz (Ω)	-10°C 100kHz (Ω)	20°C 120Hz	(µA)	(mA <sub>rms</sub> )	(mm)	Details: Page 15
63 (79) 1J	150	0,796	0,100	0,300	0,09	189	876	10 x 25	ECR1JGC151M◇◇△△1025
		0,796	0,110	0,330	0,09	189	745	12,5 x 15	ECR1JGC151M◇◇△△1215
	180	0,664	0,085	0,260	0,09	227	1020	10 x 30	ECR1JGC181M◇◇△△1030
		0,543	0,075	0,230	0,09	278	979	12,5 x 20	ECR1JGC221M◇◇△△1220
	220	0,543	0,080	0,240	0,09	278	982	16 x 15	ECR1JGC221M◇◇△△1615
		0,443	0,065	0,200	0,09	341	1180	12,5 x 25	ECR1JGC271M◇◇△△1225
	330	0,362	0,065	0,200	0,09	416	1200	18 x 15	ECR1JGC331M◇◇△△1815
		390	0,307	0,055	0,170	0,09	492	1310	12,5 x 30
	470		0,307	0,057	0,170	0,09	492	1210	16 x 20
		0,254	0,048	0,140	0,09	593	1470	12,5 x 35	ECR1JGC471M◇◇△△1235
		0,254	0,052	0,160	0,09	593	1490	16 x 25	ECR1JGC471M◇◇△△1625
	560	0,214	0,042	0,130	0,09	706	1590	18 x 20	ECR1JGC471M◇◇△△1820
								12,5 x 40	ECR1JGC561M◇◇△△1240
	680	0,176	0,042	0,130	0,09	857	1890	16 x 31,5	ECR1JGC681M◇◇△△1631
								18 x 25	ECR1JGC681M◇◇△△1825
	820	0,146	0,036	0,110	0,09	1034	2140	16 x 35,5	ECR1JGC821M◇◇△△1635
								18 x 31,5	ECR1JGC821M◇◇△△1831
	1 000	0,120	0,032	0,096	0,09	1260	2410	16 x 40	ECR1JGC102M◇◇△△1640
18 x 35,5								ECR1JGC102M◇◇△△1835	
1 200	0,100	0,032	0,096	0,09	1512	2560	18 x 40	ECR1JGC122M◇◇△△1840	


100 (125) 2A	5,6	19,0	1,90	7,60	0,08	12	57	5 x 11,5	ECR2AGC5R6M◇◇△△0511
	8,2	13,0	1,30	5,20	0,08	17	74	5 x 15	ECR2AGC8R2M◇◇△△0515
	12	8,85	1,10	4,40	0,08	24	78	6,3 x 11,5	ECR2AGC120M◇◇△△0611
	18	5,90	0,620	2,50	0,08	36	85	6,3 x 15	ECR2AGC180M◇◇△△0615
	22	4,83	0,530	2,10	0,08	44	275	8 x 11,5	ECR2AGC220M◇◇△△0811
	27	3,94	0,470	1,90	0,08	54	319	10 x 12,5	ECR2AGC270M◇◇△△1012
								8 x 16	ECR2AGC330M◇◇△△0816
	33	3,22	0,350	1,40	0,08	66	360	10 x 16	ECR2AGC330M◇◇△△1016
								10 x 16	ECR2AGC330M◇◇△△1016
	39	2,73	0,270	1,10	0,08	78	490	8 x 20	ECR2AGC390M◇◇△△0820
	56	1,90	0,250	1,00	0,08	112	499	10 x 20	ECR2AGC560M◇◇△△1020
	68	1,57	0,180	0,720	0,08	136	634	10 x 25	ECR2AGC680M◇◇△△1025
								12,5 x 15	ECR2AGC680M◇◇△△1215
	100	1,07	0,150	0,600	0,08	200	739	10 x 30	ECR2AGC101M◇◇△△1030
								12,5 x 20	ECR2AGC101M◇◇△△1220
	120	0,885	0,110	0,440	0,08	240	857	12,5 x 25	ECR2AGC121M◇◇△△1225
								16 x 15	ECR2AGC121M◇◇△△1615
	150	0,708	0,120	0,480	0,08	300	871	18 x 15	ECR2AGC151M◇◇△△1815
	180	0,590	0,090	0,360	0,08	360	1120	12,5 x 30	ECR2AGC181M◇◇△△1230
								16 x 20	ECR2AGC181M◇◇△△1620
	220	0,483	0,075	0,300	0,08	440	1240	12,5 x 35	ECR2AGC221M◇◇△△1235
								16 x 25	ECR2AGC221M◇◇△△1625
	270	0,393	0,060	0,240	0,08	540	1330	12,5 x 40	ECR2AGC271M◇◇△△1240
								18 x 20	ECR2AGC271M◇◇△△1820
	330	0,322	0,059	0,230	0,08	660	1630	16 x 31,5	ECR2AGC331M◇◇△△1631
								18 x 25	ECR2AGC331M◇◇△△1825
	390	0,273	0,052	0,210	0,08	780	1750	16 x 35,5	ECR2AGC391M◇◇△△1635
								18 x 31,5	ECR2AGC391M◇◇△△1831
470	0,226	0,045	0,180	0,08	940	1920	16 x 40	ECR2AGC471M◇◇△△1640	
560	0,190	0,054	0,220	0,08	1120	1920	18 x 35,5	ECR2AGC561M◇◇△△1835	
680	0,157	0,041	0,160	0,08	1360	2100	18 x 40	ECR2AGC681M◇◇△△1840	

IMPEDANCE RATIO

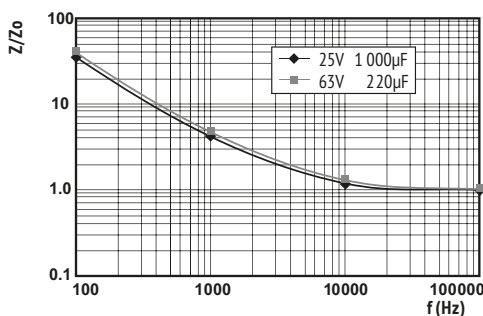


Z = actual impedance of each frequency at 20°C,  
Z<sub>0</sub> = Impedance at 100kHz, 20°C  
Impedance Ratio as a function of frequency

CAPACITANCE RATIO

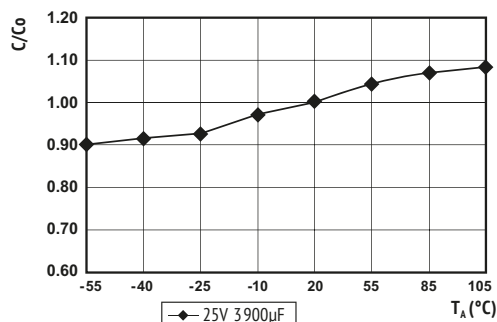

C = actual capacitance of each temperature at 100Hz,  
Co = Capacitance at 20°C, 100Hz  
Capacitance Ratio as a function of temperature (typical curve)

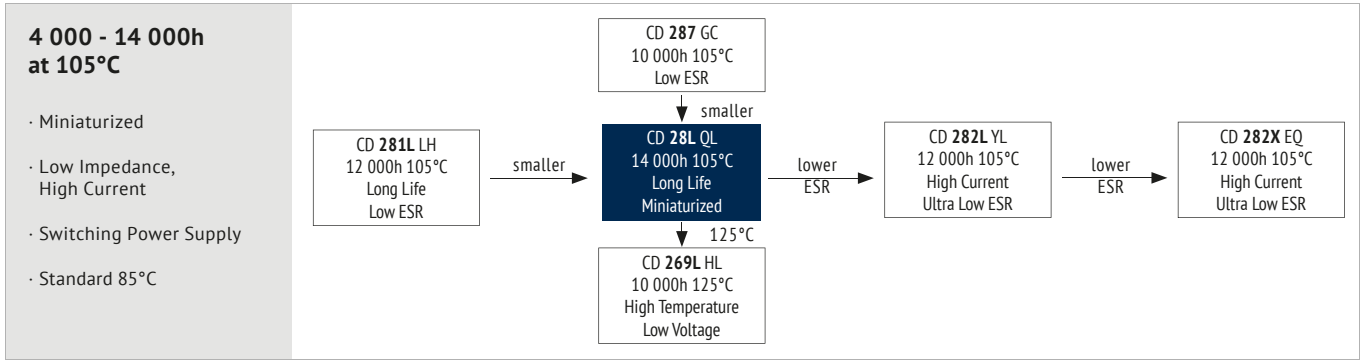


**ITEM CHARACTERISTICS**

Operating Temperature Range (°C)	-55 ~ +105
Voltage Range (V)	6,3 ~ 63
Capacitance Range (µF)	12 ~ 18 000
Capacitance Tolerance (20°C, 120Hz)	± 20%

**!** The usage at lower temperatures than indicated may be possible. Please contact the Jianghai Europe sales office for approval.

Leakage Current (µA) After 2 minutes at 20°C application of rated voltage, leakage current is not more than specified in table.

Stability at Low Temperature (Impedance Ratio at 120Hz)	Rated Voltage (V)	6,3 ~ 63
	Z <sub>-55°C</sub> / Z <sub>+20°C</sub>	3


**ITEM USEFUL LIFE LOAD LIFE ENDURANCE TEST SHELF LIFE**

Lifetime	$\varnothing \leq 6,3$ : 4 000h $\varnothing 8$ : 6 000h $\varnothing 10$ : 10 000h $\varnothing 12,5$ : 12 000h $\varnothing \geq 16$ : 14 000h	$\varnothing \geq 8$ : > 250 000h	$\varnothing \leq 6,3$ : 2 000h $\varnothing 8$ : 3 000h $\varnothing 10$ : 5 000h $\varnothing 12,5$ : 7 000h $\varnothing \geq 16$ : 8 000h	$\varnothing \leq 6,3$ : 3 000h $\varnothing 8$ : 5 000h $\varnothing 10$ : 7 000h $\varnothing 12,5$ : 9 000h $\varnothing \geq 16$ : 10 000h	1 000h
Leakage Current	Not more than specified value		Not more than specified value	Not more than specified value	Not more than specified value
Capacitance Change	Within ± 30% of initial value		Within ± 20% of initial value	Within ± 20% of initial value	Within ± 20% of initial value
Dissipation Factor	Not more than 300% of specified value		Not more than 200% of specified value	Not more than 200% of specified value	Not more than 200% of specified value
Condition: Applied Voltage Applied Current Applied Temperature	U <sub>R</sub> I <sub>R</sub> 105°C	U <sub>R</sub> 1,4 x I <sub>R</sub> 40°C	U <sub>R</sub> I <sub>R</sub> 105°C	U <sub>R</sub> I <sub>R</sub> 105°C IEC 60384	U <sub>R</sub> = 0 I <sub>R</sub> = 0 105°C After test: U <sub>R</sub> to be applied for 30 min > 24h before measurement

**MULTIPLIER FOR RIPPLE CURRENT (FREQUENCY COEFFICIENT)**

Capacitance (µF)	Frequency			
	120Hz	1kHz	10kHz	100kHz
12 ~ 180	0,40	0,75	0,90	1,00
220 ~ 560	0,50	0,83	0,93	1,00
680 ~ 1 800	0,60	0,86	0,95	1,00
2 200 ~ 3 900	0,75	0,90	0,97	1,00
4 700 ~ 18 000	0,85	0,95	0,98	1,00

Multipliers for typical operating conditions.

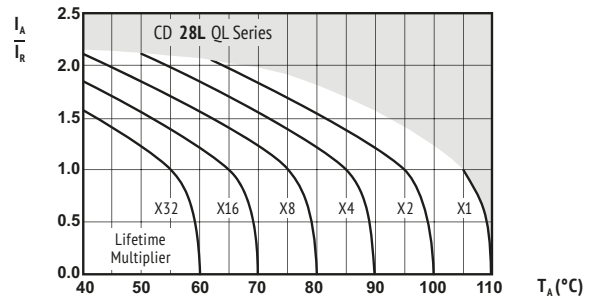**MULTIPLIER FOR LIFETIME (LIFETIME DIAGRAM)**


I<sub>A</sub> = actual ripple current at 100kHz,  
 I<sub>R</sub> = rated ripple current at 100kHz, 105°C  
 Multiplier of Useful Life as a function of ambient temperature & ripple current load

**ENVIRONMENTAL**

The products are RoHS, WEEE and RECh compliant. The detailed version please see separate "Environmental Certificates" document or [www.jianghai-europe.com](http://www.jianghai-europe.com)

**! SAFETY FACTOR**

This diagram includes a safety margin. In many cases the allowed current capability/lifetime may be increased. For details and approvals please contact the Jianghai Europe sales office.

RADIAL



RADIAL

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance	Z <sub>max</sub> Max Impedance		tanδ Dissipation Factor	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current	Size øD x L	ORDER CODE
			20°C 120kHz	20°C 100kHz					
(V)	(µF)	(Ω)	(Ω)	(Ω)		(µA)	(mA <sub>rms</sub> )	(mm)	Details: Page 15
6,3 (7,2) 0J	150	1,95	0,500	1,00	0,22	10	175	5 x 11,5	ECR0JQL151M◇◇◇◇0511
	330	0,885	0,250	0,500	0,22	21	290	6,3 x 11,5	ECR0JQL331M◇◇◇◇0611
	470	0,621	0,180	0,360	0,22	30	400	6,3 x 15	ECR0JQL471M◇◇◇◇0615
	680	0,430	0,120	0,240	0,22	43	555	8 x 11,5	ECR0JQL681M◇◇◇◇0811
	820	0,356	0,090	0,180	0,22	52	760	10 x 12,5	ECR0JQL821M◇◇◇◇1012
	1 000	0,292	0,090	0,180	0,22	63	730	8 x 16	ECR0JQL102M◇◇◇◇0816
	1 200	0,244	0,080	0,160	0,22	76	810	8 x 20	ECR0JQL122M◇◇◇◇0820
		0,244	0,068	0,136	0,22	76	1050	10 x 16	ECR0JQL122M◇◇◇◇1016
	1 500	0,195	0,052	0,104	0,22	95	1220	10 x 20	ECR0JQL152M◇◇◇◇1020
	2 200	0,145	0,045	0,090	0,24	139	1440	10 x 25	ECR0JQL222M◇◇◇◇1025
	2 700	0,118	0,037	0,074	0,24	171	1690	10 x 30	ECR0JQL272M◇◇◇◇1030
	3 300	0,105	0,038	0,076	0,26	208	1660	12,5 x 20	ECR0JQL332M◇◇◇◇1220
	3 900	0,089	0,030	0,060	0,26	246	1950	12,5 x 25	ECR0JQL392M◇◇◇◇1225
	4 700	0,080	0,025	0,050	0,28	297	2310	12,5 x 30	ECR0JQL472M◇◇◇◇1230
	5 600	0,072	0,022	0,044	0,30	353	2510	12,5 x 35	ECR0JQL562M◇◇◇◇1235
		0,072	0,029	0,058	0,30	353	2210	16 x 20	ECR0JQL562M◇◇◇◇1620
	6 800	0,063	0,017	0,034	0,32	429	2870	12,5 x 40	ECR0JQL682M◇◇◇◇1240
		0,063	0,022	0,044	0,32	429	2560	16 x 25	ECR0JQL682M◇◇◇◇1625
8 200	0,063	0,028	0,056	0,32	429	2490	18 x 20	ECR0JQL682M◇◇◇◇1820	
	0,059	0,019	0,038	0,36	517	3010	16 x 31,5	ECR0JQL822M◇◇◇◇1631	
10 000	0,054	0,017	0,034	0,40	630	3150	16 x 35,5	ECR0JQL103M◇◇◇◇1635	
	0,054	0,020	0,040	0,40	630	2740	18 x 25	ECR0JQL103M◇◇◇◇1825	
12 000	0,049	0,015	0,030	0,44	756	3710	16 x 40	ECR0JQL123M◇◇◇◇1640	
	0,049	0,018	0,036	0,44	756	3330	18 x 31,5	ECR0JQL123M◇◇◇◇1831	
15 000	0,045	0,016	0,032	0,50	945	3680	18 x 35,5	ECR0JQL153M◇◇◇◇1835	
18 000	0,042	0,015	0,030	0,56	1134	3800	18 x 40	ECR0JQL183M◇◇◇◇1840	
10 (13) 1A	100	2,53	0,500	1,00	0,19	10	175	5 x 11,5	ECR1AQL101M◇◇◇◇0511
	220	1,15	0,250	0,500	0,19	22	290	6,3 x 11,5	ECR1AQL221M◇◇◇◇0611
	330	0,764	0,180	0,360	0,19	33	400	6,3 x 15	ECR1AQL331M◇◇◇◇0615
	470	0,537	0,120	0,240	0,19	47	555	8 x 11,5	ECR1AQL471M◇◇◇◇0811
	680	0,371	0,090	0,180	0,19	68	730	8 x 16	ECR1AQL681M◇◇◇◇0816
		0,371	0,090	0,180	0,19	68	730	8 x 16	ECR1AQL681M◇◇◇◇0816
	820	0,371	0,090	0,180	0,19	68	760	10 x 12,5	ECR1AQL681M◇◇◇◇1012
		0,371	0,090	0,180	0,19	68	760	10 x 12,5	ECR1AQL681M◇◇◇◇1012
	1 000	0,252	0,080	0,160	0,19	100	810	8 x 20	ECR1AQL102M◇◇◇◇0820
	1 200	0,252	0,068	0,136	0,19	100	1050	10 x 16	ECR1AQL102M◇◇◇◇1016
		0,210	0,052	0,104	0,19	120	1220	10 x 20	ECR1AQL122M◇◇◇◇1020
	1 500	0,168	0,045	0,090	0,19	150	1440	10 x 25	ECR1AQL152M◇◇◇◇1025
	1 800	0,140	0,037	0,074	0,19	180	1690	10 x 30	ECR1AQL182M◇◇◇◇1030
	2 200	0,127	0,038	0,076	0,21	220	1660	12,5 x 20	ECR1AQL222M◇◇◇◇1220
	3 300	0,093	0,030	0,060	0,23	330	1950	12,5 x 25	ECR1AQL332M◇◇◇◇1225
	3 900	0,079	0,025	0,050	0,23	390	2310	12,5 x 30	ECR1AQL392M◇◇◇◇1230
		0,079	0,029	0,058	0,23	390	2210	16 x 20	ECR1AQL392M◇◇◇◇1620
	4 700	0,071	0,022	0,044	0,25	470	2510	12,5 x 35	ECR1AQL472M◇◇◇◇1235
0,064		0,017	0,034	0,27	560	2870	12,5 x 40	ECR1AQL562M◇◇◇◇1240	
5 600	0,064	0,022	0,044	0,27	560	2560	16 x 25	ECR1AQL562M◇◇◇◇1625	
	0,064	0,028	0,056	0,27	560	2490	18 x 20	ECR1AQL562M◇◇◇◇1820	
6 800	0,057	0,019	0,038	0,29	680	3010	16 x 31,5	ECR1AQL682M◇◇◇◇1631	
	0,057	0,020	0,040	0,29	680	2740	18 x 25	ECR1AQL682M◇◇◇◇1825	
8 200	0,054	0,017	0,034	0,33	820	3150	16 x 35,5	ECR1AQL822M◇◇◇◇1635	
	0,054	0,018	0,036	0,33	820	3330	18 x 31,5	ECR1AQL822M◇◇◇◇1831	
10 000	0,050	0,015	0,030	0,37	1000	3710	16 x 40	ECR1AQL103M◇◇◇◇1640	
	0,050	0,016	0,032	0,37	1000	3680	18 x 35,5	ECR1AQL103M◇◇◇◇1835	
12 000	0,046	0,015	0,030	0,41	1200	3800	18 x 40	ECR1AQL123M◇◇◇◇1840	
16 (20) 1C	47	4,52	0,500	1,00	0,16	8	175	5 x 11,5	ECR1CQL470M◇◇◇◇0511
	100	2,13	0,250	0,500	0,16	16	290	6,3 x 11,5	ECR1CQL101M◇◇◇◇0611
	220	0,965	0,180	0,360	0,16	36	400	6,3 x 15	ECR1CQL221M◇◇◇◇0615
	330	0,644	0,120	0,240	0,16	53	555	8 x 11,5	ECR1CQL331M◇◇◇◇0811
	470	0,452	0,090	0,180	0,16	76	730	8 x 16	ECR1CQL471M◇◇◇◇0816
		0,452	0,090	0,180	0,16	76	760	10 x 12,5	ECR1CQL471M◇◇◇◇1012
	560	0,379	0,080	0,160	0,16	90	810	8 x 20	ECR1CQL561M◇◇◇◇0820
	680	0,313	0,068	0,136	0,16	109	1050	10 x 16	ECR1CQL681M◇◇◇◇1016
	1 000	0,213	0,052	0,104	0,16	160	1220	10 x 20	ECR1CQL102M◇◇◇◇1020
	1 200	0,177	0,045	0,090	0,16	192	1440	10 x 25	ECR1CQL122M◇◇◇◇1025
	1 500	0,142	0,037	0,074	0,16	240	1690	10 x 30	ECR1CQL152M◇◇◇◇1030
		0,142	0,038	0,076	0,16	240	1660	12,5 x 20	ECR1CQL152M◇◇◇◇1220
	2 200	0,109	0,030	0,060	0,18	352	1950	12,5 x 25	ECR1CQL222M◇◇◇◇1225



U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub>	Z <sub>max</sub>	Z <sub>max</sub>	tanδ	I <sub>leak</sub>	I <sub>RAC</sub>	Size øD x L	ORDER CODE
		Equivalent Series Resistance	Max Impedance	Max Impedance	Dissipation Factor	Leakage Current	Rated Ripple Current		
(V)	(µF)	20°C 120kHz (Ω)	20°C 100kHz (Ω)	-10°C 100kHz (Ω)	20°C 120Hz	(µA)	105°C 100kHz (mArms)	(mm)	Details: Page 15
16 (20) 1C	2 700	0,089	0,025	0,050	0,18	432	2310	12,5 x 30	ECR1CQL272M◇◇△△1230
		0,089	0,029	0,058	0,18	432	2210	16 x 20	ECR1CQL272M◇◇△△1620
	3 300	0,081	0,022	0,044	0,20	528	2510	12,5 x 35	ECR1CQL332M◇◇△△1235
		0,069	0,017	0,034	0,20	624	2870	12,5 x 40	ECR1CQL392M◇◇△△1240
	3 900	0,069	0,022	0,044	0,20	624	2560	16 x 25	ECR1CQL392M◇◇△△1625
		0,069	0,028	0,056	0,20	624	2490	18 x 20	ECR1CQL392M◇◇△△1820
		0,063	0,019	0,038	0,22	752	3010	16 x 31,5	ECR1CQL472M◇◇△△1631
	4 700	0,063	0,020	0,040	0,22	752	2740	18 x 25	ECR1CQL472M◇◇△△1825
		0,057	0,017	0,034	0,24	896	3150	16 x 35,5	ECR1CQL562M◇◇△△1635
	5 600	0,057	0,018	0,036	0,24	896	3330	18 x 31,5	ECR1CQL562M◇◇△△1831
0,051		0,015	0,030	0,26	1088	3710	16 x 40	ECR1CQL682M◇◇△△1640	
8 200	0,049	0,016	0,032	0,30	1312	3680	18 x 35,5	ECR1CQL822M◇◇△△1835	
10 000	0,046	0,015	0,030	0,34	1600	3800	18 x 40	ECR1CQL103M◇◇△△1840	
25 (32) 1E	47	3,96	0,500	1,00	0,14	12	175	5 x 11,5	ECR1EQL470M◇◇△△0511
	100	1,86	0,250	0,500	0,14	25	290	6,3 x 11,5	ECR1EQL101M◇◇△△0611
	150	1,24	0,180	0,360	0,14	38	400	6,3 x 15	ECR1EQL151M◇◇△△0615
	220	0,845	0,120	0,240	0,14	55	555	8 x 11,5	ECR1EQL221M◇◇△△0811
		0,563	0,090	0,180	0,14	83	730	8 x 16	ECR1EQL331M◇◇△△0816
	330	0,563	0,090	0,180	0,14	83	760	10 x 12,5	ECR1EQL331M◇◇△△1012
		0,477	0,080	0,160	0,14	98	810	8 x 20	ECR1EQL391M◇◇△△0820
	470	0,396	0,068	0,136	0,14	118	1050	10 x 16	ECR1EQL471M◇◇△△1016
	680	0,274	0,052	0,104	0,14	170	1220	10 x 20	ECR1EQL681M◇◇△△1020
	820	0,227	0,045	0,090	0,14	205	1440	10 x 25	ECR1EQL821M◇◇△△1025
	1 000	0,186	0,037	0,074	0,14	250	1690	10 x 30	ECR1EQL102M◇◇△△1030
		0,186	0,038	0,076	0,14	250	1660	12,5 x 20	ECR1EQL102M◇◇△△1220
	1 500	0,124	0,030	0,060	0,14	375	1950	12,5 x 25	ECR1EQL152M◇◇△△1225
	1 800	0,104	0,025	0,050	0,14	450	2310	12,5 x 30	ECR1EQL182M◇◇△△1230
		0,104	0,029	0,058	0,14	450	2210	16 x 20	ECR1EQL182M◇◇△△1620
	2 200	0,097	0,022	0,044	0,16	550	2510	12,5 x 35	ECR1EQL222M◇◇△△1235
		0,097	0,028	0,056	0,16	550	2490	18 x 20	ECR1EQL222M◇◇△△1820
	2 700	0,079	0,017	0,034	0,16	675	2870	12,5 x 40	ECR1EQL272M◇◇△△1240
		0,079	0,022	0,044	0,16	675	2560	16 x 25	ECR1EQL272M◇◇△△1625
	3 300	0,073	0,019	0,038	0,18	825	3010	16 x 31,5	ECR1EQL332M◇◇△△1631
		0,073	0,020	0,040	0,18	825	2740	18 x 25	ECR1EQL332M◇◇△△1825
	3 900	0,062	0,017	0,034	0,18	975	3150	16 x 35,5	ECR1EQL392M◇◇△△1635
		0,062	0,018	0,036	0,18	975	3330	18 x 31,5	ECR1EQL392M◇◇△△1831
	4 700	0,057	0,015	0,030	0,20	1175	3710	16 x 40	ECR1EQL472M◇◇△△1640
		0,057	0,016	0,032	0,20	1175	3680	18 x 35,5	ECR1EQL472M◇◇△△1835
5 600	0,053	0,015	0,030	0,22	1400	3800	18 x 40	ECR1EQL562M◇◇△△1840	
35 (44) 1V	33	4,83	0,500	1,00	0,12	12	175	5 x 11,5	ECR1VQL330M◇◇△△0511
	56	2,85	0,250	0,500	0,12	20	290	6,3 x 11,5	ECR1VQL560M◇◇△△0611
	100	1,60	0,180	0,360	0,12	35	400	6,3 x 15	ECR1VQL101M◇◇△△0615
	150	1,07	0,120	0,240	0,12	53	555	8 x 11,5	ECR1VQL151M◇◇△△0811
	220	0,724	0,090	0,180	0,12	77	730	8 x 16	ECR1VQL221M◇◇△△0816
		0,724	0,090	0,180	0,12	77	760	10 x 12,5	ECR1VQL221M◇◇△△1012
	270	0,590	0,080	0,160	0,12	95	810	8 x 20	ECR1VQL271M◇◇△△0820
	330	0,483	0,068	0,136	0,12	116	1050	10 x 16	ECR1VQL331M◇◇△△1016
	470	0,339	0,052	0,104	0,12	165	1220	10 x 20	ECR1VQL471M◇◇△△1020
	560	0,285	0,045	0,090	0,12	196	1440	10 x 25	ECR1VQL561M◇◇△△1025
	680	0,235	0,037	0,074	0,12	238	1690	10 x 30	ECR1VQL681M◇◇△△1030
		0,235	0,038	0,076	0,12	238	1660	12,5 x 20	ECR1VQL681M◇◇△△1220
	1 000	0,160	0,030	0,060	0,12	350	1950	12,5 x 25	ECR1VQL102M◇◇△△1225
	1 200	0,133	0,025	0,050	0,12	420	2310	12,5 x 30	ECR1VQL122M◇◇△△1230
		0,133	0,029	0,058	0,12	420	2210	16 x 20	ECR1VQL122M◇◇△△1620
	1 500	0,107	0,022	0,044	0,12	525	2510	12,5 x 35	ECR1VQL152M◇◇△△1235
	1 800	0,089	0,017	0,034	0,12	630	2870	12,5 x 40	ECR1VQL182M◇◇△△1240
		0,089	0,022	0,044	0,12	630	2560	16 x 25	ECR1VQL182M◇◇△△1625
		0,089	0,028	0,056	0,12	630	2490	18 x 20	ECR1VQL182M◇◇△△1820
	2 200	0,085	0,019	0,038	0,14	770	3010	16 x 31,5	ECR1VQL222M◇◇△△1631
		0,085	0,020	0,040	0,14	770	2740	18 x 25	ECR1VQL222M◇◇△△1825
	2 700	0,069	0,017	0,034	0,14	945	3150	16 x 35,5	ECR1VQL272M◇◇△△1635
		0,069	0,018	0,036	0,14	945	3330	18 x 31,5	ECR1VQL272M◇◇△△1831
	3 300	0,065	0,015	0,030	0,16	1155	3710	16 x 40	ECR1VQL332M◇◇△△1640
		0,065	0,016	0,032	0,16	1155	3680	18 x 35,5	ECR1VQL332M◇◇△△1835
3 900	0,055	0,015	0,030	0,16	1365	3800	18 x 40	ECR1VQL392M◇◇△△1840	

RADIAL


>>

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance	Z <sub>max</sub> Max Impedance		tanδ Dissipation Factor	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current	Size øD x L	ORDER CODE
			20°C 120kHz	20°C 100kHz					
(V)	(µF)	(Ω)	(Ω)	(Ω)		(µA)	(mA <sub>rms</sub> )	(mm)	Details: Page 15
<b>50</b> (63) 1H	22	6,04	0,900	1,80	0,10	11	155	5 x 11,5	ECR1HQL220M◇◇◇◇0511
	47	2,83	0,450	0,900	0,10	24	260	6,3 x 11,5	ECR1HQL470M◇◇◇◇0611
	68	1,96	0,310	0,620	0,10	34	360	6,3 x 15	ECR1HQL680M◇◇◇◇0615
	100	1,33	0,220	0,440	0,10	50	485	8 x 11,5	ECR1HQL101M◇◇◇◇0811
	120	1,11	0,160	0,320	0,10	60	635	8 x 16	ECR1HQL121M◇◇◇◇0816
		1,11	0,160	0,320	0,10	60	620	10 x 12,5	ECR1HQL121M◇◇◇◇1012
	180	0,737	0,120	0,240	0,10	90	730	8 x 20	ECR1HQL181M◇◇◇◇0820
		0,737	0,130	0,260	0,10	90	850	10 x 16	ECR1HQL181M◇◇◇◇1016
	220	0,603	0,088	0,180	0,10	110	1050	10 x 20	ECR1HQL221M◇◇◇◇1020
	330	0,402	0,080	0,160	0,10	165	1250	10 x 25	ECR1HQL331M◇◇◇◇1025
	390	0,341	0,065	0,130	0,10	195	1500	10 x 30	ECR1HQL391M◇◇◇◇1030
		0,341	0,070	0,140	0,10	195	1480	12,5 x 20	ECR1HQL391M◇◇◇◇1220
	560	0,237	0,054	0,108	0,10	280	1840	12,5 x 25	ECR1HQL561M◇◇◇◇1225
	680	0,196	0,044	0,088	0,10	340	2220	12,5 x 30	ECR1HQL681M◇◇◇◇1230
		0,196	0,048	0,096	0,10	340	1840	16 x 20	ECR1HQL681M◇◇◇◇1620
	820	0,162	0,033	0,066	0,10	410	2290	12,5 x 35	ECR1HQL821M◇◇◇◇1235
		0,162	0,042	0,084	0,10	410	1980	18 x 20	ECR1HQL821M◇◇◇◇1820
	1 000	0,133	0,029	0,058	0,10	500	2500	12,5 x 40	ECR1HQL102M◇◇◇◇1240
	1 200	0,133	0,034	0,068	0,10	500	2240	16 x 25	ECR1HQL102M◇◇◇◇1625
		0,111	0,028	0,056	0,10	600	2700	16 x 31,5	ECR1HQL122M◇◇◇◇1631
1 500	0,111	0,029	0,058	0,10	600	2610	18 x 25	ECR1HQL122M◇◇◇◇1825	
	0,089	0,025	0,050	0,10	750	2800	16 x 35,5	ECR1HQL152M◇◇◇◇1635	
1 800	0,074	0,021	0,042	0,10	900	3200	16 x 40	ECR1HQL182M◇◇◇◇1640	
	0,074	0,025	0,050	0,10	900	3000	18 x 31,5	ECR1HQL182M◇◇◇◇1831	
2 200	0,073	0,023	0,046	0,12	1100	3100	18 x 35,5	ECR1HQL222M◇◇◇◇1835	
2 700	0,059	0,022	0,044	0,12	1350	3400	18 x 40	ECR1HQL272M◇◇◇◇1840	

RADIAL


<b>63</b> (79) 1J	12	8,85	1,90	4,000	0,08	8	145	5 x 11,5	ECR1JQL120M◇◇◇◇0511
	22	4,83	1,00	2,000	0,08	14	240	6,3 x 11,5	ECR1JQL220M◇◇◇◇0611
	39	2,73	0,610	1,400	0,08	25	330	6,3 x 15	ECR1JQL390M◇◇◇◇0615
	68	1,57	0,340	0,750	0,08	43	405	8 x 11,5	ECR1JQL680M◇◇◇◇0811
	100	1,07	0,270	0,650	0,08	63	535	8 x 16	ECR1JQL101M◇◇◇◇0816
		1,07	0,255	0,510	0,08	63	540	10 x 12,5	ECR1JQL101M◇◇◇◇1012
	120	0,885	0,190	0,380	0,08	76	600	10 x 16	ECR1JQL121M◇◇◇◇1016
	150	0,708	0,210	0,520	0,08	95	690	8 x 20	ECR1JQL151M◇◇◇◇0820
	180	0,590	0,145	0,290	0,08	114	890	10 x 20	ECR1JQL181M◇◇◇◇1020
	220	0,483	0,130	0,260	0,08	139	1050	10 x 25	ECR1JQL221M◇◇◇◇1025
	330	0,322	0,090	0,180	0,08	208	1300	10 x 30	ECR1JQL331M◇◇◇◇1030
		0,322	0,085	0,170	0,08	208	1290	12,5 x 20	ECR1JQL331M◇◇◇◇1220
	390	0,273	0,070	0,140	0,08	246	1720	12,5 x 25	ECR1JQL391M◇◇◇◇1225
	470	0,226	0,055	0,110	0,08	297	2090	12,5 x 30	ECR1JQL471M◇◇◇◇1230
		0,226	0,059	0,120	0,08	297	1770	16 x 20	ECR1JQL471M◇◇◇◇1620
	680	0,157	0,047	0,094	0,08	429	2270	12,5 x 35	ECR1JQL681M◇◇◇◇1235
		0,157	0,050	0,100	0,08	429	2160	16 x 25	ECR1JQL681M◇◇◇◇1625
	820	0,157	0,055	0,110	0,08	429	2290	18 x 20	ECR1JQL681M◇◇◇◇1820
		0,130	0,042	0,084	0,08	517	2560	12,5 x 40	ECR1JQL821M◇◇◇◇1240
	1 000	0,130	0,043	0,086	0,08	517	2670	16 x 31,5	ECR1JQL821M◇◇◇◇1631
0,130		0,043	0,086	0,08	517	2590	18 x 25	ECR1JQL821M◇◇◇◇1825	
1 200	0,107	0,036	0,072	0,08	630	2770	16 x 35,5	ECR1JQL102M◇◇◇◇1635	
1 500	0,089	0,030	0,060	0,08	756	2850	16 x 40	ECR1JQL122M◇◇◇◇1640	
	0,089	0,032	0,064	0,08	756	2950	18 x 31,5	ECR1JQL122M◇◇◇◇1831	
1 800	0,071	0,030	0,060	0,08	945	3100	18 x 35,5	ECR1JQL152M◇◇◇◇1835	
1 800	0,059	0,025	0,050	0,08	1134	3210	18 x 40	ECR1JQL182M◇◇◇◇1840	

### IMPEDANCE RATIO

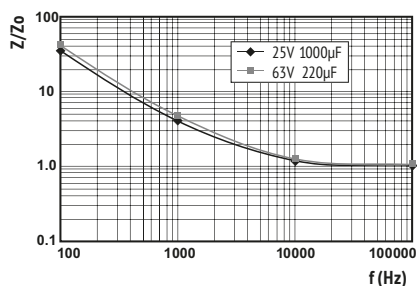

Z = actual impedance of each frequency at 20°C,  
Zo = Impedance at 100kHz, 20°C  
Impedance Ratio as a function of frequency

### CAPACITANCE RATIO

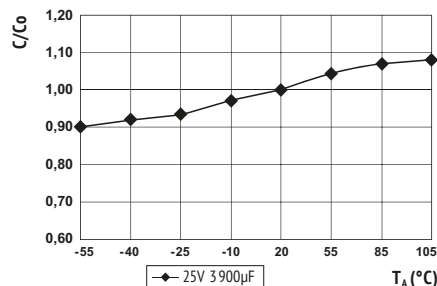

C = actual capacitance of each temperature at 100Hz,  
Co = Capacitance at 20°C, 100Hz  
Capacitance Ratio as a function of temperature (typical curve)



# ELECTROLYTIC CAPACITORS


## Snap-In Type

### OVERVIEW SNAP-IN


Portfolio: All Snap-In Type at a glance	78
Order code	79
Technical Specifications	80

SERIES SNAP-IN	Code	Type	Temperature	Voltage	Lifetime	Info	
CD 293	BZ	Snap-In	85°C	10-500V	4 000h	Standard	82
CD 294	BW	Snap-In	105°C	16-550V	4 000h	Standard	86
CD 295	BC	Snap-In	85°C	10-500V	6 000h	Long Life	90
CD 295S	BS	Snap-In	85°C (105°C)	160-500V	12 000h	12 000h, Enlarged Temperature	94
CD 296	KC	Snap-In	105°C	16-550V	5 000h	Long Life	96
CD 296L	FL	Snap-In	105°C	350-500V	6 000h	Large Size 105°C	100
CD 297	BB	Snap-In	105°C	10-500V	7 000h	Longer Life, High Current	102
CD 299	PG	Snap-In	105°C	160-500V	9 000h	9 000h, High Current	106
CD 29C	QC	Snap-In	105°C	200-450V	4 000h	Miniaturized 105°C	109
CD 29D	HR	Snap-In	85°C	160-450V	7 000h	Long Life, Highest Currents	111
CD 29H	QH	Snap-In	105°C	160-450V	5 000h	Long Life, Highest Currents	113
CD 29HD	QF	Snap-In	105°C	200-450V	8 000h	Outstanding Ripple Current	116
CD 29L	QL	Snap-In	85°C	16-500V	7 000h	Long Life, Large Size	118
CD 29U	CU	Snap-In	85°C	575-630V	6 000h	575V, 600V, 630V	121
CD 29UH	UT	Snap-In	105°C	575V, 600V	6 000h	575V, 600V at 105°C	123
CD 840	ZQ	Snap-In	85°C	200-450V	10 000h	10 000h High Current	125
CD 891	ZJ	Snap-In	85°C	35-500V	4 000h	Miniaturized	127
CD 892	ZL	Snap-In	105°C	400-500V	5 000h	Miniaturized, Long Life	130
CD 895	ZK	Snap-In	85°C	16-500V	14 000h	Ultra Long Life	132

SNAP-IN 85°C

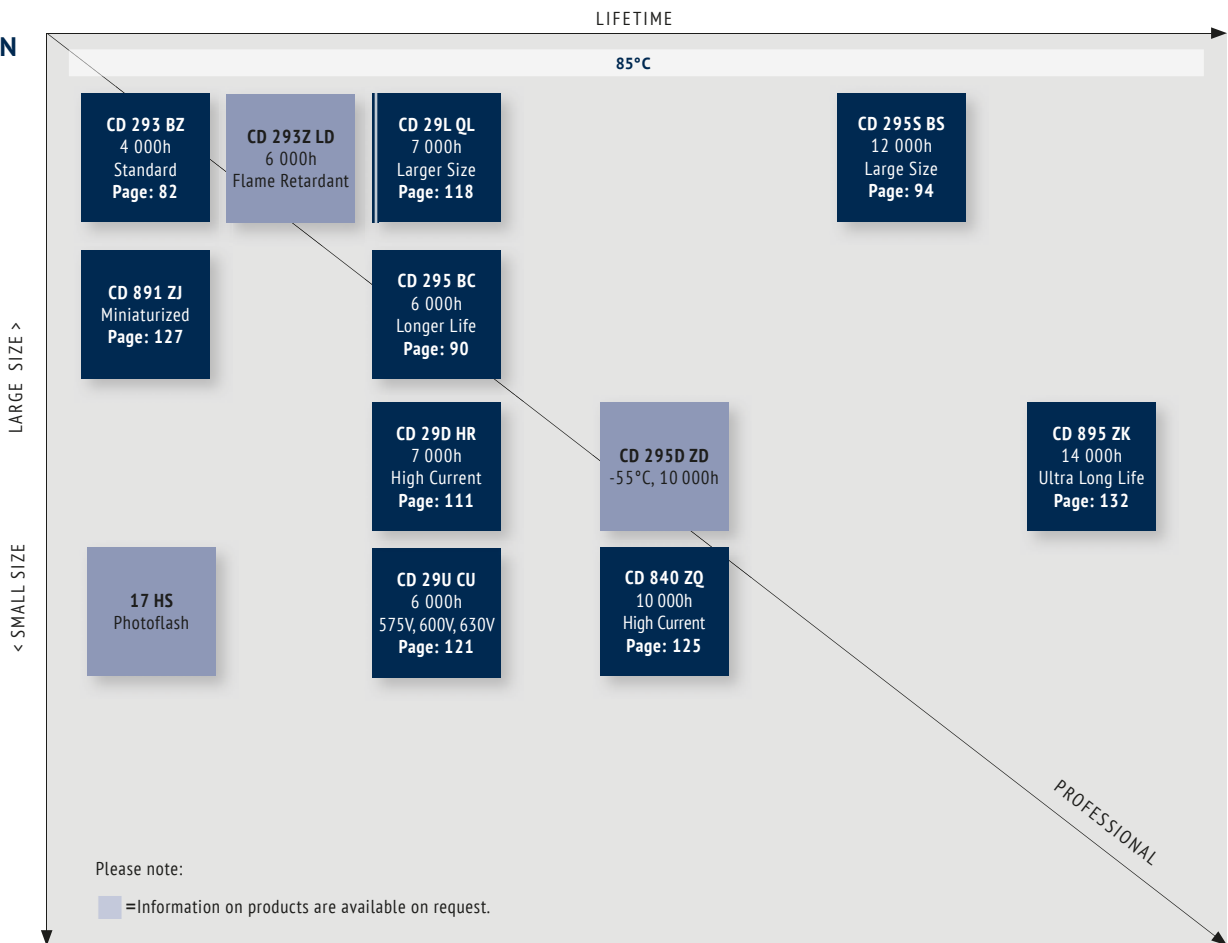


SNAP-IN 105°C/125°C

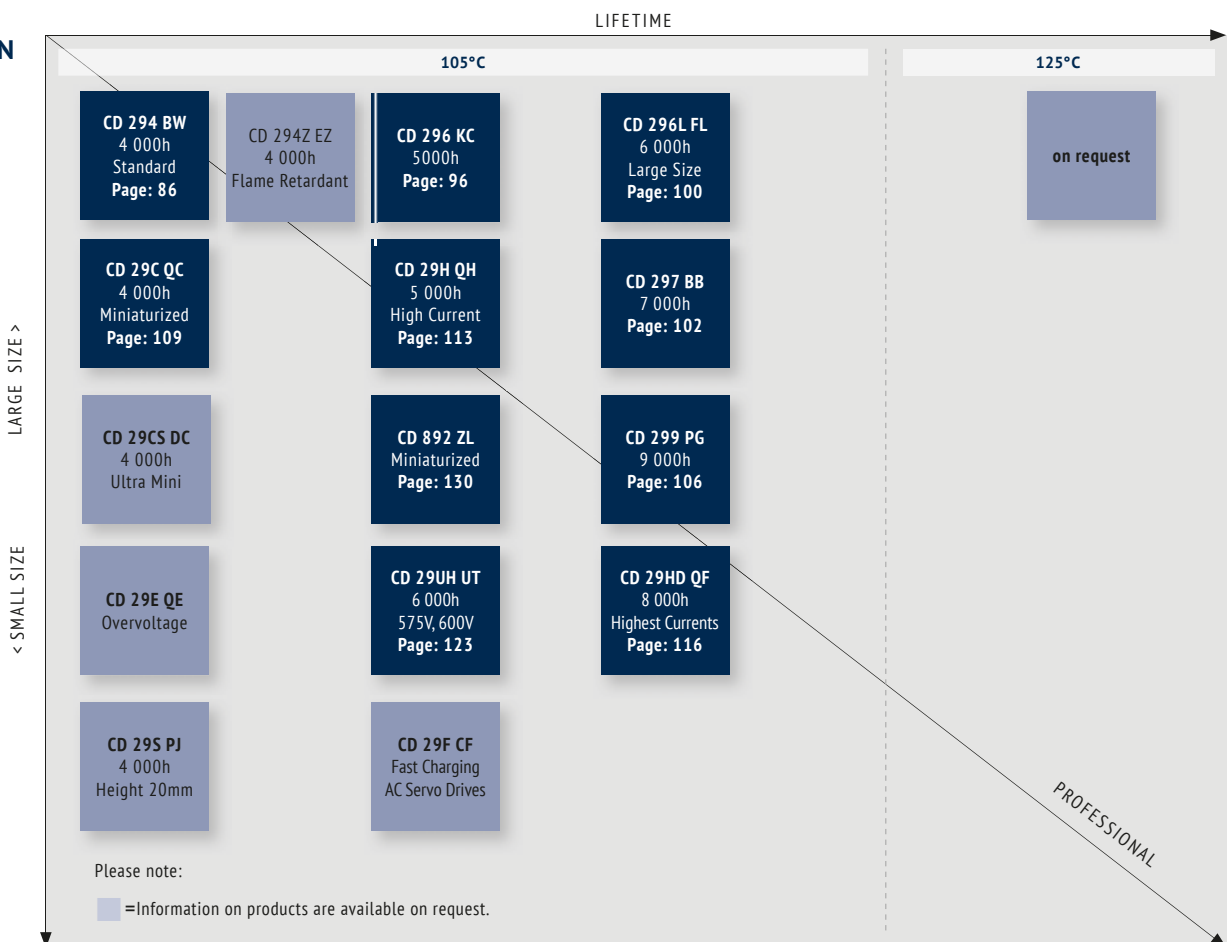

**ORDER CODE SNAP-IN TYPE**

EC	S	2G	QC	221	M	T6	P2	2535	-	JExxxxx
Techno-logy	Terminal Type	Rated Voltage Code	Series Code	Capacitance Code	Capacitance Tolerance	Terminal Style	Terminal / Pitch	Dimension (mm)	Material Code	for Specials only
EC = Electrolytic Capacitor	Snap-In S	6,3V <b>0J</b>	CD 293 <b>BZ</b>	0,1 <b>0R1</b>	<b>±20%</b> M	4,0mm Pin Length <b>T/L4</b>	<b>2 Pin P2</b>	22x40 <b>2240</b>	Standard -	
		10V <b>1A</b>	CD 294 <b>BW</b>	0,47 <b>R47</b>	±10% K	<b>6,3mm Pin Length T/L6</b>	3 Pin <b>P3</b>	30x45 <b>3045</b>	PVC V	
		16V <b>1C</b>	CD 295 <b>BC</b>	1,0 <b>010</b>	+30/-10% Q	Soldering Pin <b>S4</b>	4 Pin <b>P4</b>	35x80 <b>3580</b>	PET E	
		20V <b>1D</b>	CD 295S <b>BS</b>	2,2 <b>2R2</b>	+20/-0% R	on request: alternative pin types	5 Pin <b>P5</b>	45x100 <b>45100</b>		
		25V <b>1E</b>	CD 296 <b>KC</b>	100 <b>101</b>	±15% L		6 Pin <b>P6</b>	50x105 <b>50105</b>		
		35V <b>1V</b>	CD 296L <b>FL</b>	1000 <b>102</b>	+20/-10% V	<b> = preferred</b>				
		40V <b>1G</b>	CD 297 <b>BB</b>	10 000 <b>103</b>						
		50V <b>1H</b>	CD 299 <b>PG</b>							
		63V <b>1J</b>	CD 29C <b>QC</b>							
		80V <b>1K</b>	CD 29D <b>HR</b>							
		100V <b>2A</b>	CD 29H <b>QH</b>							
		125V <b>2B</b>	CD 29HD <b>QF</b>							
		160V <b>2C</b>	CD 29L <b>QL</b>							
		180V <b>2K</b>	CD 29U <b>CU</b>							
		200V <b>2D</b>	CD 29UH <b>UT</b>							
		250V <b>2E</b>	CD 840 <b>ZQ</b>							
		315V <b>2F</b>	CD 891 <b>ZI</b>							
		350V <b>2V</b>	CD 892 <b>ZL</b>							
		385V <b>2J</b>	CD 895 <b>ZK</b>							
		400V <b>2G</b>								
		415V <b>2P</b>								
		420V <b>2X</b>								
		450V <b>2W</b>								
		500V <b>2H</b>								
		550V <b>2Y</b>								
		575V <b>2Z</b>								
		600V <b>2S</b>								
630V <b>1Z</b>										

## 2 PIN TYPE: T6P2 / T4P2 STANDARD

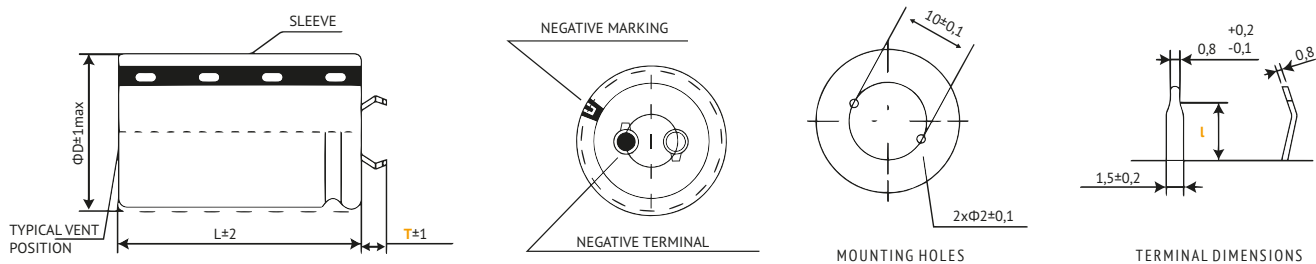


Standard Version: Self-Lock Terminal. Other terminal types and styles on request.  
For diameter  $\Phi D \geq 45$  mm the safety vent is typically placed at the side of the housing.

Terminal	T6 (preferred)	T4
Pin Length $T$	6,3 mm	4,0 mm
Pin Detail $l$	3,5 mm	2,5 mm

⚠ Max. Current Snap-In Terminal: 15A  
For more current please ask for Lug-Terminals.

in mm

## 3 PIN TYPE: T4P3

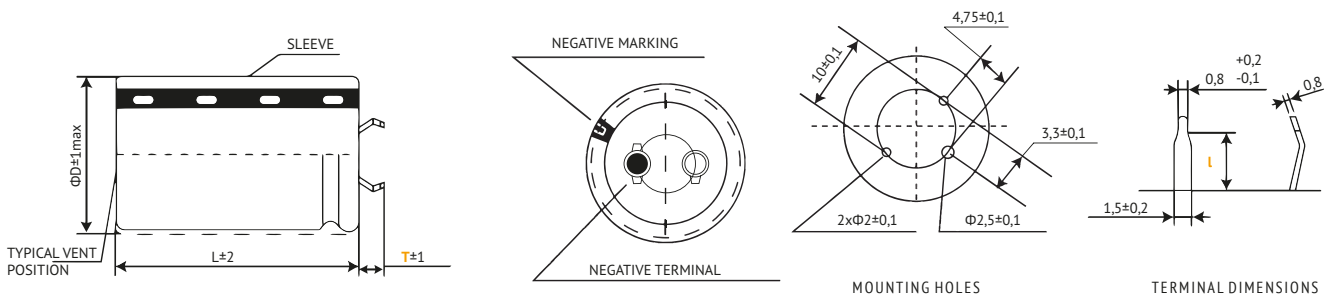


For diameter  $\Phi D \geq 45$  mm the safety vent is typically placed at the side of the housing.

Terminal	T6	T4
Pin Length $T$	-	4,0 mm
Pin Detail $l$	-	2,5 mm

⚠ Max. Current Snap-In Terminal: 15A  
For more current please ask for Lug-Terminals.

in mm

## 4 PIN TYPE: T6P4/T4P4 STANDARD

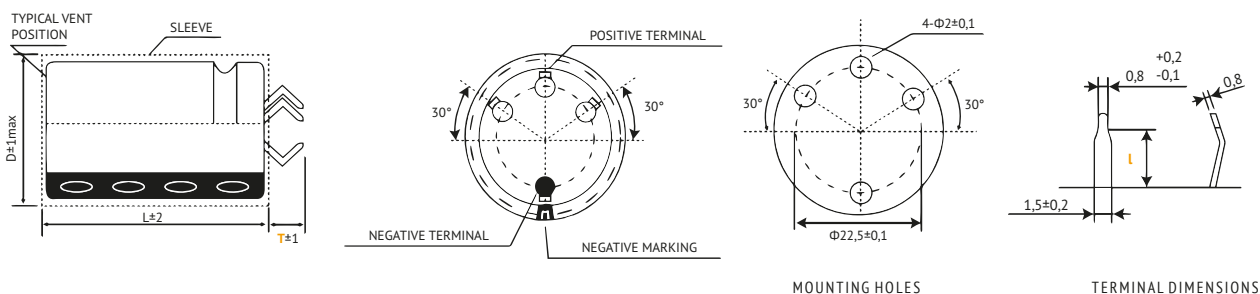


Standard Version: Non-Lock-Terminal. Other terminal types and styles on request.  
For  $\Phi D \geq 30$  mm only.  
For diameter  $\Phi D \geq 45$  mm the safety vent is typically placed at the side of the housing.

Terminal	T6 (preferred)	T4
Pin Length $T$	6,3 mm	4,0 mm
Pin Detail $l$	3,5 mm	2,5 mm

⚠ Max. Current Snap-In Terminal: 15A  
For more current please ask for Lug-Terminals.

in mm

## 4 PIN TYPE: L6P4/L4P4 SELF-LOCK TERMINAL

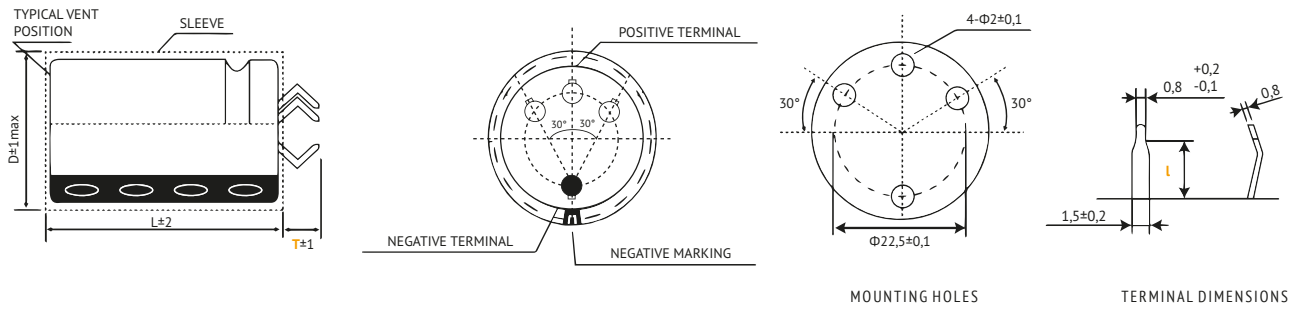


For  $\varnothing D \geq 30\text{mm}$  only. Other terminal types and styles on request.  
For diameter  $\varnothing D \geq 45\text{mm}$  the safety vent is typically placed at the side of the housing.

Terminal	T6 (preferred)	T4
Pin Length <b>T</b>	6,3 mm	4,0 mm
Pin Detail <b>l</b>	3,5 mm	2,5 mm

**!** Max. Current Snap-In Terminal: 15A  
For more current please ask for Lug-Terminals.

in mm

## 5 PIN TYPE: S4P5 SOLDERING PIN

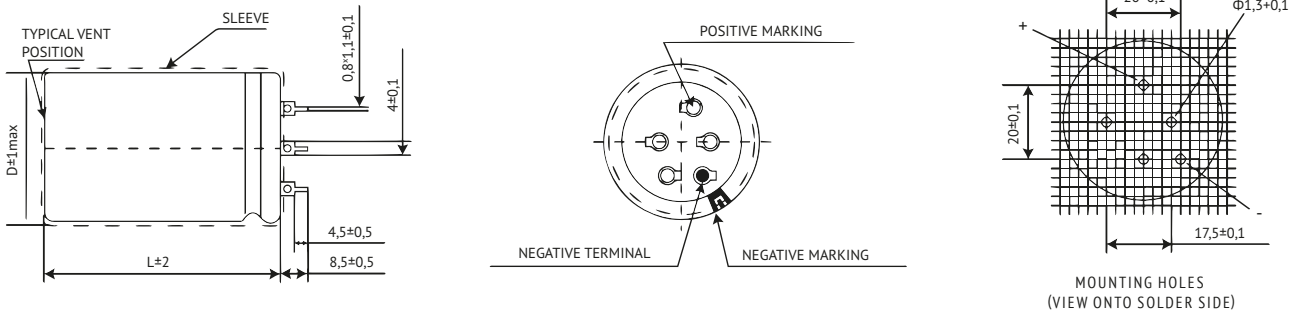


For  $\varnothing D \geq 30\text{mm}$  only.  
For diameter  $\varnothing D \geq 45\text{mm}$  the safety vent is typically placed at the side of the housing.

**!** Max. Current Snap-In Terminal: 15A  
For more current please ask for Lug-Terminals.

in mm

## EXAMPLE: AXIAL MOUNTING

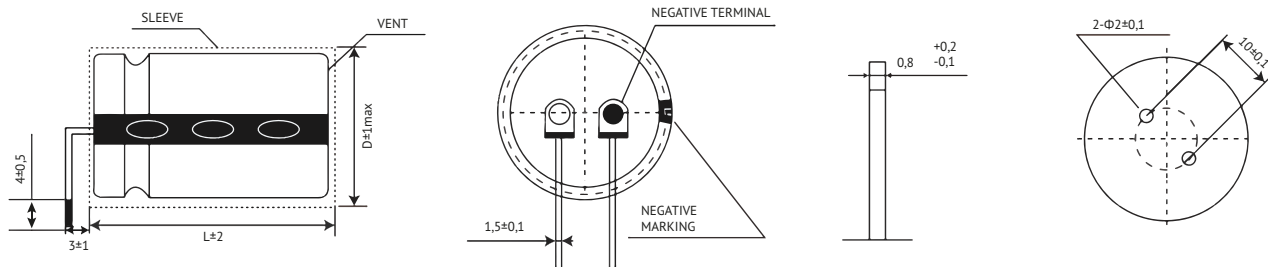


For  $\varnothing D \geq 25\text{mm}$  only.  
Available also for high vibration usage.

**!** Max. Current Snap-In Terminal: 15A  
For more current please ask for Lug-Terminals.

in mm

Other Terminal Styles on request.



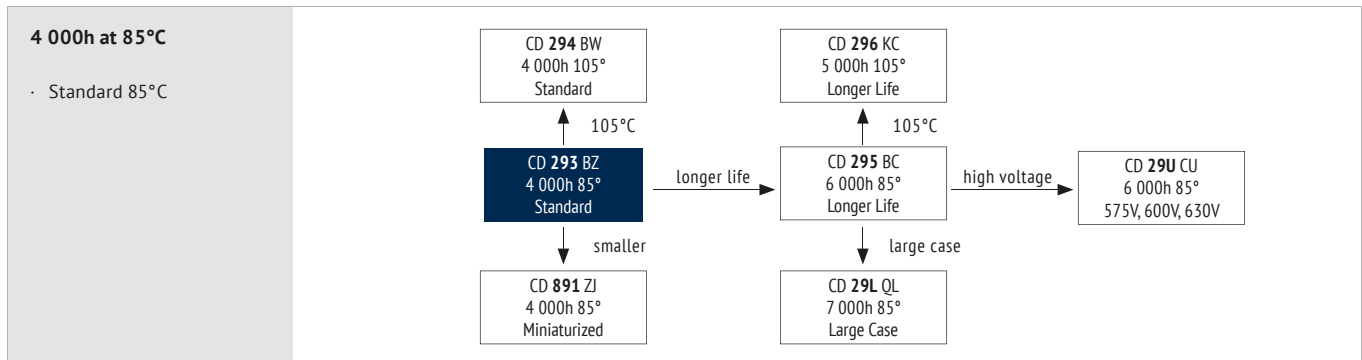

**ITEM CHARACTERISTICS**

Operating Temperature Range (°C)	-40 ~ +85	-25 ~ +85
Voltage Range (V)	10 ~ 400	420 ~ 500
Capacitance Range (µF)	68 ~ 82 000	
Capacitance Tolerance (20°C, 120Hz)	± 20%	

**!** The usage at lower temperatures than indicated may be possible. Please contact the Jianghai Europe sales office for approval.

Leakage Current: After 5 minutes at 20°C application of rated voltage, leakage current is not more than specified in table.

Stability at Low Temperature (Impedance Ratio at 120Hz)	Rated Voltage (V)	10	16-35	50-100	160-200	250-400	420-500
	Z <sub>-25°C</sub> / Z <sub>+20°C</sub>		5	4	3	3	4
Z <sub>-40°C</sub> / Z <sub>+20°C</sub>		18	15	10	6	8	-

Fast Charge-Discharge: **!** Please contact Jianghai for an appropriate choice of the capacitor or possible technical adaptations, esp. for applications like: Welding, Photoflash, Servo motors, X-Ray


ITEM	USEFUL LIFE	LOAD LIFE	ENDURANCE TEST	SHELF LIFE
Lifetime	4 000h > 65 000h	2 000h	3 000h	1 000h
Leakage Current	Not more than specified value		Not more than specified value	Not more than specified value
Capacitance Change	Within ± 30% of initial value		Within ± 20% of initial value	Within ± 15% of initial value
Dissipation Factor	Not more than 300% of specified value		Not more than 150% of specified value	Not more than 150% of specified value
Condition: Applied Voltage Applied Current Applied Temperature	U <sub>R</sub> I <sub>R</sub> 85°C	U <sub>R</sub> 1,2 x I <sub>R</sub> 40°C	U <sub>R</sub> I <sub>R</sub> 85°C	U <sub>R</sub> = 0 I <sub>R</sub> = 0 85°C IEC 60384
				After test: U <sub>R</sub> to be applied for 30 min > 24h before measurement

**MULTIPLIER FOR RIPPLE CURRENT (FREQUENCY COEFFICIENT)**

Rated Voltage (V)	Frequency					
	50Hz	120Hz	300Hz	1kHz	10kHz	100kHz
≤ 50	0,88	1,00	1,07	1,15	1,15	1,15
63 ~ 100	0,80	1,00	1,17	1,32	1,45	1,50
≥ 160	0,80	1,00	1,16	1,30	1,41	1,43

Multipliers for typical operating conditions.

**MULTIPLIER FOR LIFETIME (LIFETIME DIAGRAM)**

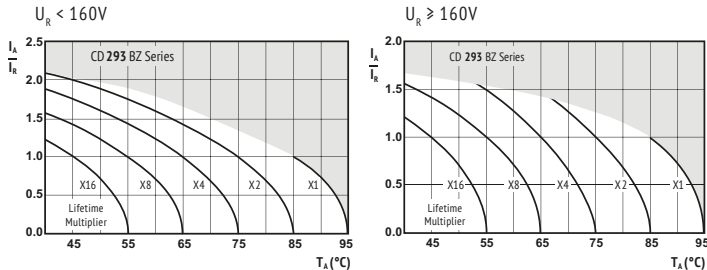

I<sub>A</sub> = actual ripple current at 120Hz, I<sub>R</sub> = rated ripple current at 120Hz, 85°C  
Multiplier of Useful Life as a function of ambient temperature & ripple current load

I<sub>A</sub> = actual ripple current at 120Hz, I<sub>R</sub> = rated ripple current at 120Hz, 85°C  
Multiplier of Useful Life as a function of ambient temperature & ripple current load

**!** Max. Current Snap-In Terminal: 15A. For more current use Lug-Terminals.

**ENVIRONMENTAL**

The products are RoHS, WEEE and REACH compliant. The detailed version please see separate "Environmental Certificates" document or www.jianghai-europe.com

**!** SAFETY FACTOR

This diagram includes a safety margin. In many cases the allowed current capability/lifetime may be increased. For details and approvals please contact the Jianghai Europe sales office.

SNAP-IN

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance (µF)	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz (mΩ)	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz (mΩ)	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current (mA)	I <sub>RAC</sub> Rated Ripple Current 85°C 120Hz (Arms)	Size øD x L (mm)	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 79
<b>10</b> <b>(13)</b> <b>1A</b>	10 000	54	43	0,40	1,0	2,5	22 x 25	ECS1ABZ103M◇◇△△2225
	12 000	45	36	0,40	1,2	2,9	22 x 25	ECS1ABZ123M◇◇△△2225
	15 000	36	29	0,40	1,5	3,2	22 x 30	ECS1ABZ153M◇◇△△2230
		36	29	0,40	1,5	3,1	25 x 25	ECS1ABZ153M◇◇△△2525
	18 000	30	24	0,40	1,5	3,6	22 x 35	ECS1ABZ183M◇◇△△2235
		30	24	0,40	1,5	3,6	25 x 30	ECS1ABZ183M◇◇△△2530
	22 000	25	20	0,40	1,5	4,0	22 x 40	ECS1ABZ223M◇◇△△2240
		25	20	0,40	1,5	4,1	25 x 35	ECS1ABZ223M◇◇△△2535
		25	20	0,40	1,5	4,1	30 x 25	ECS1ABZ223M◇◇△△3025
	33 000	17	13	0,40	1,5	4,6	25 x 40	ECS1ABZ333M◇◇△△2540
		17	13	0,40	1,5	4,8	30 x 30	ECS1ABZ333M◇◇△△3030
		17	13	0,40	1,5	4,8	35 x 25	ECS1ABZ333M◇◇△△3525
	39 000	14	10,9	0,40	1,5	5,2	25 x 45	ECS1ABZ393M◇◇△△2545
		14	10,9	0,40	1,5	5,3	30 x 35	ECS1ABZ393M◇◇△△3035
	47 000	12	9,1	0,40	1,5	5,8	25 x 50	ECS1ABZ473M◇◇△△2550
		12	9,1	0,40	1,5	6,0	30 x 40	ECS1ABZ473M◇◇△△3040
	56 000	12	9,1	0,40	1,5	6,0	35 x 30	ECS1ABZ473M◇◇△△3530
		9,5	7,6	0,40	1,5	6,7	30 x 45	ECS1ABZ563M◇◇△△3045
	68 000	9,5	7,6	0,40	1,5	6,8	35 x 35	ECS1ABZ563M◇◇△△3535
		7,9	6,3	0,40	1,5	7,5	30 x 50	ECS1ABZ683M◇◇△△3050
82 000	7,9	6,3	0,40	1,5	7,7	35 x 40	ECS1ABZ683M◇◇△△3540	
	6,5	5,2	0,40	1,5	8,7	35 x 45	ECS1ABZ823M◇◇△△3545	

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance (µF)	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz (mΩ)	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz (mΩ)	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current (mA)	I <sub>RAC</sub> Rated Ripple Current 85°C 120Hz (Arms)	Size øD x L (mm)	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 79
<b>16</b> <b>(20)</b> <b>1C</b>	8 200	65	52	0,40	1,3	2,2	22 x 25	ECS1CBZ822M◇◇△△2225
	10 000	54	43	0,40	1,5	2,6	22 x 30	ECS1CBZ103M◇◇△△2230
		54	43	0,40	1,5	2,6	25 x 25	ECS1CBZ103M◇◇△△2525
	12 000	45	36	0,40	1,5	2,9	22 x 35	ECS1CBZ123M◇◇△△2235
		36	29	0,40	1,5	3,3	22 x 40	ECS1CBZ153M◇◇△△2240
	15 000	36	29	0,40	1,5	3,3	25 x 30	ECS1CBZ153M◇◇△△2530
		36	29	0,40	1,5	3,4	30 x 25	ECS1CBZ153M◇◇△△3025
	18 000	30	24	0,40	1,5	3,8	22 x 45	ECS1CBZ183M◇◇△△2245
		30	24	0,40	1,5	3,7	25 x 35	ECS1CBZ183M◇◇△△2535
	22 000	25	20	0,40	1,5	4,2	22 x 50	ECS1CBZ223M◇◇△△2250
		25	20	0,40	1,5	4,2	25 x 40	ECS1CBZ223M◇◇△△2540
		25	20	0,40	1,5	4,2	30 x 30	ECS1CBZ223M◇◇△△3030
	27 000	25	20	0,40	1,5	4,2	35 x 25	ECS1CBZ223M◇◇△△3525
		20	16	0,40	1,5	5,0	25 x 45	ECS1CBZ273M◇◇△△2545
		20	16	0,40	1,5	5,0	30 x 35	ECS1CBZ273M◇◇△△3035
	33 000	17	13	0,40	1,5	5,6	30 x 40	ECS1CBZ333M◇◇△△3040
		17	13	0,40	1,5	5,6	35 x 30	ECS1CBZ333M◇◇△△3530
	39 000	14	11	0,40	1,5	6,2	30 x 45	ECS1CBZ393M◇◇△△3045
		14	11	0,40	1,5	6,3	35 x 35	ECS1CBZ393M◇◇△△3535
	47 000	12	9,1	0,40	1,5	7,0	30 x 50	ECS1CBZ473M◇◇△△3050
12		9,1	0,40	1,5	7,2	35 x 40	ECS1CBZ473M◇◇△△3540	
56 000	9,5	7,6	0,40	1,5	8,0	35 x 45	ECS1CBZ563M◇◇△△3545	

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance (µF)	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz (mΩ)	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz (mΩ)	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current (mA)	I <sub>RAC</sub> Rated Ripple Current 85°C 120Hz (Arms)	Size øD x L (mm)	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 79
<b>25</b> <b>(32)</b> <b>1E</b>	5 600	83	67	0,35	1,4	2,0	22 x 25	ECS1EBZ562M◇◇△△2225
	6 800	69	55	0,35	1,5	2,3	22 x 30	ECS1EBZ682M◇◇△△2230
		69	55	0,35	1,5	2,3	25 x 25	ECS1EBZ682M◇◇△△2525
	8 200	57	46	0,35	1,5	2,6	22 x 35	ECS1EBZ822M◇◇△△2235
		47	38	0,35	1,5	2,9	22 x 40	ECS1EBZ103M◇◇△△2240
	10 000	47	38	0,35	1,5	2,8	25 x 30	ECS1EBZ103M◇◇△△2530
		47	38	0,35	1,5	3,0	30 x 25	ECS1EBZ103M◇◇△△3025
	12 000	39	31	0,35	1,5	3,3	22 x 45	ECS1EBZ123M◇◇△△2245
		39	31	0,35	1,5	3,2	25 x 35	ECS1EBZ123M◇◇△△2535
		39	31	0,35	1,5	3,4	30 x 30	ECS1EBZ123M◇◇△△3030
	15 000	31	25	0,35	1,5	3,7	25 x 40	ECS1EBZ153M◇◇△△2540
		31	25	0,35	1,5	3,9	35 x 25	ECS1EBZ153M◇◇△△3525
	18 000	26	21	0,35	1,5	4,3	25 x 50	ECS1EBZ183M◇◇△△2550
		26	21	0,35	1,5	4,2	30 x 35	ECS1EBZ183M◇◇△△3035
	22 000	26	21	0,35	1,5	4,4	35 x 30	ECS1EBZ183M◇◇△△3530
		22	17	0,35	1,5	4,8	30 x 40	ECS1EBZ223M◇◇△△3040
	33 000	22	17	0,35	1,5	5,0	35 x 35	ECS1EBZ223M◇◇△△3535
	39 000	15	12	0,35	1,5	6,5	35 x 40	ECS1EBZ333M◇◇△△3540
	47 000	12	10	0,35	1,5	7,5	35 x 45	ECS1EBZ393M◇◇△△3545
	47 000	10	8,0	0,35	1,5	8,8	35 x 50	ECS1EBZ473M◇◇△△3550

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance (µF)	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz (mΩ)	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz (mΩ)	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current (mA)	I <sub>RAC</sub> Rated Ripple Current 85°C 120Hz (Arms)	Size øD x L (mm)	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 79
<b>35</b> <b>(44)</b> <b>1V</b>	3 300	101	81	0,25	1,2	1,8	22 x 25	ECS1VBZ332M◇◇△△2225
	3 900	86	69	0,25	1,4	2,1	22 x 30	ECS1VBZ392M◇◇△△2230
	4 700	71	57	0,25	1,5	2,2	25 x 25	ECS1VBZ472M◇◇△△2525
		72	57	0,30	1,5	2,3	22 x 35	ECS1VBZ562M◇◇△△2235
	5 600	72	57	0,30	1,5	2,3	25 x 30	ECS1VBZ562M◇◇△△2530
		59	47	0,30	1,5	2,9	22 x 40	ECS1VBZ682M◇◇△△2240
	6 800	59	47	0,30	1,5	2,6	25 x 35	ECS1VBZ682M◇◇△△2535
		59	47	0,30	1,5	2,7	30 x 25	ECS1VBZ682M◇◇△△3025
	8 200	57	46	0,35	1,5	2,8	22 x 50	ECS1VBZ822M◇◇△△2250
		57	46	0,35	1,5	2,8	25 x 40	ECS1VBZ822M◇◇△△2540
		57	46	0,35	1,5	2,8	30 x 30	ECS1VBZ822M◇◇△△3030
	10 000	57	46	0,35	1,5	2,9	35 x 25	ECS1VBZ822M◇◇△△3525
		47	38	0,35	1,5	3,1	25 x 45	ECS1VBZ103M◇◇△△2545
	12 000	47	38	0,35	1,5	3,2	30 x 35	ECS1VBZ103M◇◇△△3035
		39	31	0,35	1,5	3,5	25 x 50	ECS1VBZ123M◇◇△△2550
	15 000	39	31	0,35	1,5	3,5	30 x 40	ECS1VBZ123M◇◇△△3040
		39	31	0,35	1,5	3,6	35 x 30	ECS1VBZ123M◇◇△△3530
	18 000	31	25	0,35	1,5	4,1	30 x 45	ECS1VBZ153M◇◇△△3045
		31	25	0,35	1,5	4,1	35 x 35	ECS1VBZ153M◇◇△△3535
	22 000	26	21	0,35	1,5	4,6	30 x 50	ECS1VBZ183M◇◇△△3050
26		21	0,35	1,5	4,7	35 x 40	ECS1VBZ183M◇◇△△3540	
27 000	22	17	0,35	1,5	5,3	35 x 45	ECS1VBZ223M◇◇△△3545	
27 000	18	14	0,35	1,5	7,0	35 x 50	ECS1VBZ273M◇◇△△3550	

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance (µF)	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz (mΩ)	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz (mΩ)	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current (mA)	I <sub>RAC</sub> Rated Ripple Current 85°C 120Hz (Arms)	Size øD x L (mm)	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 79
<b>50</b> <b>(63)</b> <b>1H</b>	2 200	120	97	0,20	1,1	1,7	22 x 25	ECS1HBZ222M◇◇△△2225
	2 700	99	79	0,20	1,4	1,9	22 x 30	ECS1HBZ272M◇◇△△2230
		99	79	0,20	1,4	1,9	25 x 25	ECS1HBZ272M◇◇△△2525
	3 300	100	81	0,25	1,5	2,0	22 x 35	ECS1HBZ332M◇◇△△2235
		86	69	0,25	1,5	2,1	22 x 35	ECS1HBZ392M◇◇△△2235
	3 900	86	69	0,25	1,5	2,1	25 x 30	ECS1HBZ392M◇◇△△2530
		86	69	0,25	1,5	2,4	30 x 25	ECS1HBZ392M◇◇△△3025
	4 700	71	57	0,25	1,5	2,4	22 x 40	ECS1HBZ472M◇◇△△2240
		71	57	0,25	1,5	2,4	25 x 35	ECS1HBZ472M◇◇△△2535
		71	57	0,25	1,5	2,4	30 x 30	ECS1HBZ472M◇◇△△3030
	5 600	72	57	0,30	1,5	2,5	22 x 50	ECS1HBZ562M◇◇△△2250
		72	57	0,30	1,5	2,5	25 x 40	ECS1HBZ562M◇◇△△2540
		72	57	0,30	1,5	2,5	30 x 30	ECS1HBZ562M◇◇△△3030
	6 800	72	57	0,30	1,5	2,6	35 x 25	ECS1HBZ562M◇◇△△3525
		59	47	0,30	1,5	2,8	25 x 45	ECS1HBZ682M◇◇△△2545
	8 200	59	47	0,30	1,5	2,8	30 x 35	ECS1HBZ682M◇◇△△3035
		57	46	0,35	1,5	3,2	25 x 50	ECS1HBZ822M◇◇△△2550
	10 000	57	46	0,35	1,5	3,0	30 x 40	ECS1HBZ822M◇◇△△3040
		57	46	0,35	1,5	3,0	35 x 30	ECS1HBZ822M◇◇△△3530
	12 000	47	38	0,35	1,5	3,4	30 x 45	ECS1HBZ103M◇◇△△3045
47		38	0,35	1,5	3,4	35 x 35	ECS1HBZ103M◇◇△△3535	
15 000	39	31	0,35	1,5	3,8	30 x 50	ECS1HBZ123M◇◇△△3050	
	39	31	0,35	1,5	3,8	35 x 40	ECS1HBZ123M◇◇△△3540	
15 000	31	25	0,35	1,5	4,5	35 x 50	ECS1HBZ153M◇◇△△3550	

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance (µF)	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz (mΩ)	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz (mΩ)	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current (mA)	I <sub>RAC</sub> Rated Ripple Current 85°C 120Hz (Arms)	Size øD x L (mm)	ORDER CODE ◇
---	---	---	---	---	--	---	------------------------	-----------------

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 85°C 120Hz	Size øD x L (mm)	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 79
63 (79) 1J	6 800	40	32	0,20	1,5	3,6	30 x 40	ECS1JBZ682M◇◇△△3040
		40	32	0,20	1,5	3,7	35 x 35	ECS1JBZ682M◇◇△△3535
	8 200	41	33	0,25	1,5	3,7	30 x 50	ECS1JBZ822M◇◇△△3050
		41	33	0,25	1,5	3,8	35 x 40	ECS1JBZ822M◇◇△△3540
	10 000	34	27	0,25	1,5	4,3	35 x 45	ECS1JBZ103M◇◇△△3545
12 000	28	23	0,25	1,5	4,8	35 x 50	ECS1JBZ123M◇◇△△3550	

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 85°C 120Hz	Size øD x L (mm)	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 79
80 (100) 1K	1 000	199	160	0,15	0,8	1,3	22 x 25	ECS1KBZ102M◇◇△△2225
	1 200	166	133	0,15	1,0	1,5	22 x 30	ECS1KBZ122M◇◇△△2230
	1 500	133	107	0,15	1,2	1,7	25 x 25	ECS1KBZ152M◇◇△△2525
	1 800	111	89	0,15	1,4	1,9	22 x 35	ECS1KBZ182M◇◇△△2235
		111	89	0,15	1,4	1,9	25 x 30	ECS1KBZ182M◇◇△△2530
	2 200	91	73	0,15	1,5	2,1	22 x 40	ECS1KBZ222M◇◇△△2240
		91	73	0,15	1,5	2,2	25 x 35	ECS1KBZ222M◇◇△△2535
	2 700	91	73	0,15	1,5	2,2	30 x 25	ECS1KBZ222M◇◇△△3025
		74	59	0,15	1,5	2,5	22 x 50	ECS1KBZ272M◇◇△△2250
	2 700	74	59	0,15	1,5	2,5	25 x 40	ECS1KBZ272M◇◇△△2540
		74	59	0,15	1,5	2,5	30 x 30	ECS1KBZ272M◇◇△△3030
	2 700	74	59	0,15	1,5	2,5	35 x 25	ECS1KBZ272M◇◇△△3525
		61	49	0,15	1,5	2,8	25 x 45	ECS1KBZ332M◇◇△△2545
	3 300	61	49	0,15	1,5	2,8	30 x 35	ECS1KBZ332M◇◇△△3035
		52	41	0,15	1,5	3,1	25 x 50	ECS1KBZ392M◇◇△△2550
	3 900	52	41	0,15	1,5	3,2	30 x 40	ECS1KBZ392M◇◇△△3040
		52	41	0,15	1,5	3,2	35 x 30	ECS1KBZ392M◇◇△△3530
	4 700	43	34	0,15	1,5	3,6	30 x 45	ECS1KBZ472M◇◇△△3045
		43	34	0,15	1,5	3,6	35 x 35	ECS1KBZ472M◇◇△△3535
	5 600	48	38	0,20	1,5	4,1	30 x 50	ECS1KBZ562M◇◇△△3050
48		38	0,20	1,5	4,1	35 x 40	ECS1KBZ562M◇◇△△3540	
6 800	40	32	0,20	1,5	4,1	35 x 45	ECS1KBZ682M◇◇△△3545	
8 200	41	33	0,20	1,5	4,7	35 x 50	ECS1KBZ822M◇◇△△3550	
10 000	34	27	0,25	1,5	5,2	35 x 50	ECS1KBZ103M◇◇△△3550	
12 000	28	23	0,25	1,5	5,8	35 x 55	ECS1KBZ123M◇◇△△3555	

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 85°C 120Hz	Size øD x L (mm)	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 79
100 (125) 2A	680	293	235	0,15	0,7	1,1	22 x 25	ECS2ABZ681M◇◇△△2225
	820	243	195	0,15	0,8	1,2	22 x 30	ECS2ABZ821M◇◇△△2230
	1 000	200	160	0,15	1,0	1,4	25 x 25	ECS2ABZ102M◇◇△△2525
	1 200	166	133	0,15	1,2	1,6	22 x 35	ECS2ABZ122M◇◇△△2235
		166	133	0,15	1,2	1,6	25 x 30	ECS2ABZ122M◇◇△△2530
	1 500	133	107	0,15	1,5	1,8	22 x 40	ECS2ABZ152M◇◇△△2240
		133	107	0,15	1,5	1,7	25 x 35	ECS2ABZ152M◇◇△△2535
	1 500	133	107	0,15	1,5	1,8	30 x 25	ECS2ABZ152M◇◇△△3025
		111	89	0,15	1,5	2,1	22 x 50	ECS2ABZ182M◇◇△△2250
	1 800	111	89	0,15	1,5	2,0	25 x 40	ECS2ABZ182M◇◇△△2540
		111	89	0,15	1,5	2,1	30 x 30	ECS2ABZ182M◇◇△△3030
	1 800	111	89	0,15	1,5	2,2	35 x 25	ECS2ABZ182M◇◇△△3525
		91	73	0,15	1,5	2,2	25 x 45	ECS2ABZ222M◇◇△△2545
	2 200	91	73	0,15	1,5	2,3	30 x 35	ECS2ABZ222M◇◇△△3035
		91	73	0,15	1,5	2,5	35 x 30	ECS2ABZ222M◇◇△△3530
	2 700	74	59	0,15	1,5	2,6	25 x 50	ECS2ABZ272M◇◇△△2550
		74	59	0,15	1,5	2,7	30 x 40	ECS2ABZ272M◇◇△△3040
	3 300	61	49	0,15	1,5	3,0	30 x 45	ECS2ABZ332M◇◇△△3045
		61	49	0,15	1,5	3,1	35 x 35	ECS2ABZ332M◇◇△△3535
	3 900	52	41	0,15	1,5	3,4	30 x 50	ECS2ABZ392M◇◇△△3050
52		41	0,15	1,5	3,4	35 x 40	ECS2ABZ392M◇◇△△3540	
4 700	43	34	0,15	1,5	4,0	35 x 50	ECS2ABZ472M◇◇△△3550	

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 85°C 120Hz	Size øD x L (mm)	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 79
160 (200) 2C	220	603	483	0,10	0,4	1,1	22 x 25	ECS2CBZ221M◇◇△△2225
	270	492	393	0,10	0,4	1,2	22 x 25	ECS2CBZ271M◇◇△△2225
	330	402	322	0,10	0,5	1,3	22 x 25	ECS2CBZ331M◇◇△△2225
	390	341	273	0,10	0,6	1,5	22 x 30	ECS2CBZ391M◇◇△△2230
		341	273	0,10	0,6	1,5	25 x 25	ECS2CBZ391M◇◇△△2525
	470	283	226	0,10	0,8	1,6	25 x 30	ECS2CBZ471M◇◇△△2530
		237	190	0,10	0,9	1,9	22 x 35	ECS2CBZ561M◇◇△△2235
	560	237	190	0,10	0,9	1,9	25 x 30	ECS2CBZ561M◇◇△△2530
		237	190	0,10	0,9	2,0	30 x 25	ECS2CBZ561M◇◇△△3025
	680	196	157	0,10	1,1	2,1	22 x 40	ECS2CBZ681M◇◇△△2240
		196	157	0,10	1,1	2,2	25 x 35	ECS2CBZ681M◇◇△△2535

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 85°C 120Hz	Size øD x L (mm)	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 79
160 (200) 2C	820	162	130	0,10	1,3	2,5	22 x 50	ECS2CBZ821M◇◇△△2250
		162	130	0,10	1,3	2,4	25 x 40	ECS2CBZ821M◇◇△△2540
		162	130	0,10	1,3	2,5	30 x 30	ECS2CBZ821M◇◇△△3030
	1 000	162	130	0,12	1,3	2,4	35 x 25	ECS2CBZ821M◇◇△△3525
		133	107	0,10	1,5	2,7	25 x 45	ECS2CBZ102M◇◇△△2545
		133	107	0,10	1,5	2,8	30 x 35	ECS2CBZ102M◇◇△△3035
	1 200	160	128	0,12	1,5	2,7	35 x 30	ECS2CBZ102M◇◇△△3530
		111	89	0,10	1,5	3,1	25 x 50	ECS2CBZ122M◇◇△△2550
		111	89	0,10	1,5	3,2	30 x 40	ECS2CBZ122M◇◇△△3040
	1 500	133	107	0,12	1,5	3,0	35 x 35	ECS2CBZ122M◇◇△△3535
		89	71	0,10	1,5	3,7	30 x 45	ECS2CBZ152M◇◇△△3045
		107	85	0,12	1,5	3,5	35 x 40	ECS2CBZ152M◇◇△△3540
1 800	89	71	0,12	1,5	3,9	35 x 45	ECS2CBZ182M◇◇△△3545	
2 200	73	58	0,12	1,5	4,5	35 x 50	ECS2CBZ222M◇◇△△3550	

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 85°C 120Hz	Size øD x L (mm)	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 79
200 (250) 2D	220	603	483	0,10	0,4	1,1	22 x 25	ECS2DBZ221M◇◇△△2225
	270	492	393	0,10	0,5	1,2	22 x 30	ECS2DBZ271M◇◇△△2230
	330	402	322	0,10	0,7	1,4	22 x 30	ECS2DBZ331M◇◇△△2230
		402	322	0,10	0,7	1,4	25 x 25	ECS2DBZ331M◇◇△△2525
	390	341	273	0,10	0,8	1,6	22 x 35	ECS2DBZ391M◇◇△△2235
		341	273	0,10	0,8	1,6	25 x 30	ECS2DBZ391M◇◇△△2530
	470	283	226	0,10	0,9	1,8	22 x 40	ECS2DBZ471M◇◇△△2240
		283	226	0,10	0,9	1,9	30 x 25	ECS2DBZ471M◇◇△△3025
	560	237	190	0,10	1,1	2,0	22 x 45	ECS2DBZ561M◇◇△△2245
		237	190	0,10	1,1	2,0	25 x 35	ECS2DBZ561M◇◇△△2535
		237	190	0,10	1,1	2,0	30 x 30	ECS2DBZ561M◇◇△△3030
	680	285	228	0,12	1,1	2,0	35 x 25	ECS2DBZ561M◇◇△△3525
		196	157	0,10	1,4	2,3	25 x 40	ECS2DBZ681M◇◇△△2540
		196	157	0,10	1,4	2,4	30 x 35	ECS2DBZ681M◇◇△△3035
	820	162	130	0,10	1,5	2,6	25 x 50	ECS2DBZ821M◇◇△△2550
		162	130	0,10	1,5	2,7	30 x 40	ECS2DBZ821M◇◇△△3040
		195	156	0,12	1,5	2,5	35 x 30	ECS2DBZ821M◇◇△△3530
	1 000	133	107	0,10	1,5	3,1	30 x 45	ECS2DBZ102M◇◇△△3045
		160	128	0,12	1,5	2,8	35 x 35	ECS2DBZ102M◇◇△△3535
	1 200	111	89	0,10	1,5	3,4	30 x 50	ECS2DBZ122M◇◇△△3050
133		107	0,12	1,5	3,2	35 x 40	ECS2DBZ122M◇◇△△3540	
1 500	107	85	0,12	1,5	3,8	35 x 50	ECS2DBZ152M◇◇△△3550	

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 85°C 120Hz	Size øD x L (mm)	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 79
250 (300) 2E	100	1 990	1 592	0,15	0,3	0,68	22 x 25	ECS2EBZ101M◇◇△△2225
	180	1 106	885	0,15	0,5	0,94	22 x 25	ECS2EBZ181M◇◇△△2225
	220	905	724	0,15	0,6	1,1	22 x 30	ECS2EBZ221M◇◇△△2230
		905	724	0,15	0,6	1,1	25 x 25	ECS2EBZ221M◇◇△△2525
	270	737	590	0,15	0,7	1,2	22 x 35	ECS2EBZ271M◇◇△△2235
		603	483	0,15	0,8	1,4	22 x 40	ECS2EBZ331M◇◇△△2240
	330	603	483	0,15	0,8	1,4	25 x 30	ECS2EBZ331M◇◇△△2530
		603	483	0,15	0,8	1,5	30 x 25	ECS2EBZ331M◇◇△△3025
	390	511	409					

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 85°C	Size øD x L (mm)	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 79
(V)	(µF)	(mΩ)	(mΩ)		(mA)	(Arms)		
<b>315</b> (365) 2F	270	737	590	0,15	0,9	1,2	22 x 45	ECS2FBZ271M◇◇△△2245
		737	590	0,15	0,9	1,3	25 x 40	ECS2FBZ271M◇◇△△2540
		737	590	0,15	0,9	1,3	30 x 30	ECS2FBZ271M◇◇△△3030
	330	737	590	0,15	0,9	1,3	35 x 25	ECS2FBZ271M◇◇△△3525
		603	483	0,15	1,0	1,4	25 x 45	ECS2FBZ331M◇◇△△2545
	390	603	483	0,15	1,0	1,4	30 x 35	ECS2FBZ331M◇◇△△3035
		511	409	0,15	1,2	1,6	25 x 50	ECS2FBZ391M◇◇△△2550
		511	409	0,15	1,2	1,6	30 x 40	ECS2FBZ391M◇◇△△3040
	470	511	409	0,15	1,2	1,6	35 x 30	ECS2FBZ391M◇◇△△3530
		424	339	0,15	1,5	1,8	30 x 45	ECS2FBZ471M◇◇△△3045
	560	424	339	0,15	1,5	1,8	35 x 35	ECS2FBZ471M◇◇△△3535
		356	285	0,15	1,5	2,0	30 x 50	ECS2FBZ561M◇◇△△3050
	680	356	285	0,15	1,5	2,0	35 x 40	ECS2FBZ561M◇◇△△3540
		293	235	0,15	1,5	2,3	35 x 45	ECS2FBZ681M◇◇△△3545

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 85°C	Size øD x L (mm)	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 79
(V)	(µF)	(mΩ)	(mΩ)		(mA)	(Arms)		
<b>350</b> (400) 2V	82	2 427	1 941	0,15	0,3	0,60	22 x 25	ECS2VBZ820M◇◇△△2225
	100	1 990	1 592	0,15	0,4	0,80	22 x 25	ECS2VBZ101M◇◇△△2225
		1 658	1 327	0,15	0,4	0,82	22 x 30	ECS2VBZ121M◇◇△△2230
	120	1 658	1 327	0,15	0,4	0,81	25 x 25	ECS2VBZ121M◇◇△△2525
		1 327	1 062	0,15	0,5	0,94	22 x 35	ECS2VBZ151M◇◇△△2235
	150	1 327	1 062	0,15	0,5	0,94	25 x 30	ECS2VBZ151M◇◇△△2530
		1 106	885	0,15	0,6	1,1	22 x 40	ECS2VBZ181M◇◇△△2240
	180	1 106	885	0,15	0,6	1,1	30 x 25	ECS2VBZ181M◇◇△△3025
		905	724	0,15	0,8	1,2	22 x 45	ECS2VBZ221M◇◇△△2245
	220	905	724	0,15	0,8	1,2	25 x 35	ECS2VBZ221M◇◇△△2535
		905	724	0,15	0,8	1,2	30 x 30	ECS2VBZ221M◇◇△△3030
		905	724	0,15	0,8	1,3	35 x 25	ECS2VBZ221M◇◇△△3525
	270	737	590	0,15	0,9	1,4	25 x 45	ECS2VBZ271M◇◇△△2545
		737	590	0,15	0,9	1,4	30 x 35	ECS2VBZ271M◇◇△△3035
	330	603	483	0,15	1,2	1,6	25 x 50	ECS2VBZ331M◇◇△△2550
		603	483	0,15	1,2	1,6	35 x 30	ECS2VBZ331M◇◇△△3530
	390	511	409	0,15	1,4	1,7	30 x 40	ECS2VBZ391M◇◇△△3040
		511	409	0,15	1,4	1,8	35 x 35	ECS2VBZ391M◇◇△△3535
470	424	339	0,15	1,5	2,0	30 x 45	ECS2VBZ471M◇◇△△3045	
	424	339	0,15	1,5	2,0	35 x 40	ECS2VBZ471M◇◇△△3540	
560	356	285	0,15	1,5	2,3	35 x 45	ECS2VBZ561M◇◇△△3545	
680	293	235	0,15	1,5	2,6	35 x 50	ECS2VBZ681M◇◇△△3550	
820	243	195	0,15	1,5	2,8	35 x 60	ECS2VBZ821M◇◇△△3560	


U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 85°C	Size øD x L (mm)	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 79
(V)	(µF)	(mΩ)	(mΩ)		(mA)	(Arms)		
<b>400</b> (450) 2G	68	2 926	2 341	0,15	0,3	0,55	22 x 25	ECS2GBZ680M◇◇△△2225
	82	2 427	1 941	0,15	0,3	0,65	22 x 25	ECS2GBZ820M◇◇△△2225
		1 990	1 592	0,15	0,4	0,70	22 x 30	ECS2GBZ101M◇◇△△2230
	100	1 990	1 592	0,15	0,4	0,70	25 x 25	ECS2GBZ101M◇◇△△2525
		1 658	1 327	0,15	0,5	0,79	22 x 35	ECS2GBZ121M◇◇△△2235
	120	1 327	1 062	0,15	0,6	0,90	22 x 35	ECS2GBZ151M◇◇△△2235
		1 327	1 062	0,15	0,6	0,89	25 x 30	ECS2GBZ151M◇◇△△2530
	150	1 106	885	0,15	0,7	1,0	22 x 40	ECS2GBZ181M◇◇△△2240
		1 106	885	0,15	0,7	1,0	25 x 30	ECS2GBZ181M◇◇△△2530
	180	905	724	0,15	0,9	1,1	22 x 50	ECS2GBZ221M◇◇△△2250
		905	724	0,15	0,9	1,2	25 x 40	ECS2GBZ221M◇◇△△2540
	220	737	590	0,15	1,1	1,3	25 x 45	ECS2GBZ271M◇◇△△2545
		737	590	0,15	1,1	1,5	30 x 30	ECS2GBZ271M◇◇△△3030
	270	603	483	0,15	1,3	1,6	25 x 45	ECS2GBZ331M◇◇△△2545
		603	483	0,15	1,3	1,7	30 x 35	ECS2GBZ331M◇◇△△3035
	330	511	409	0,15	1,5	1,9	30 x 40	ECS2GBZ391M◇◇△△3040
		511	409	0,15	1,5	1,8	35 x 30	ECS2GBZ391M◇◇△△3530
	390	424	339	0,15	1,5	2,1	35 x 35	ECS2GBZ471M◇◇△△3535
470	356	285	0,15	1,5	2,3	35 x 40	ECS2GBZ561M◇◇△△3540	
560	293	235	0,15	1,5	2,7	35 x 45	ECS2GBZ681M◇◇△△3545	
680	243	194	0,15	1,5	3,1	35 x 50	ECS2GBZ821M◇◇△△3550	
820	133	107	0,15	1,5	3,7	35 x 60	ECS2GBZ102M◇◇△△3560	

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 85°C	Size øD x L (mm)	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 79
(V)	(µF)	(mΩ)	(mΩ)		(mA)	(Arms)		
<b>420</b> (470) 2X	100	1 990	1 592	0,15	0,4	0,71	22 x 30	ECS2XBZ101M◇◇△△2230
		1 990	1 592	0,15	0,4	0,72	25 x 25	ECS2XBZ101M◇◇△△2525
	120	1 658	1 327	0,15	0,5	0,81	22 x 35	ECS2XBZ121M◇◇△△2235
		1 658	1 327	0,15	0,5	0,82	25 x 30	ECS2XBZ121M◇◇△△2530
	150	1 327	1 062	0,15	0,6	0,96	25 x 30	ECS2XBZ151M◇◇△△2530

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 85°C	Size øD x L (mm)	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 79
(V)	(µF)	(mΩ)	(mΩ)		(mA)	(Arms)		
<b>420</b> (470) 2X	180	1 106	885	0,15	0,8	1,1	25 x 35	ECS2XBZ181M◇◇△△2535
		1 106	885	0,15	0,8	1,2	30 x 30	ECS2XBZ181M◇◇△△3030
	220	905	724	0,15	0,9	1,2	25 x 40	ECS2XBZ221M◇◇△△2540
		905	724	0,15	0,9	1,3	30 x 30	ECS2XBZ221M◇◇△△3030
	270	737	590	0,15	1,1	1,3	25 x 45	ECS2XBZ271M◇◇△△2545
		737	590	0,15	1,1	1,4	30 x 35	ECS2XBZ271M◇◇△△3035
	330	603	483	0,15	1,4	1,7	30 x 40	ECS2XBZ331M◇◇△△3040
		511	409	0,15	1,5	1,8	30 x 45	ECS2XBZ391M◇◇△△3045
	390	511	409	0,15	1,5	1,9	35 x 35	ECS2XBZ391M◇◇△△3535
		424	339	0,15	1,5	2,1	30 x 50	ECS2XBZ471M◇◇△△3050
	470	424	339	0,15	1,5	2,2	35 x 40	ECS2XBZ471M◇◇△△3540
		560	356	0,15	1,5	2,4	35 x 45	ECS2XBZ561M◇◇△△3545
	680	293	235	0,15	1,5	2,8	35 x 50	ECS2XBZ681M◇◇△△3550
		820	243	194	0,15	1,5	3,2	35 x 60
	1 000	199	107	0,15	1,5	4,0	40 x 60	ECS2XBZ102M◇◇△△4060

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 85°C	Size øD x L (mm)	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 79
(V)	(µF)	(mΩ)	(mΩ)		(mA)	(Arms)		
<b>450</b> (500) 2W	68	2 926	2 341	0,15	0,3	0,57	22 x 25	ECS2WBZ680M◇◇△△2225
	82	2 427	1 941	0,15	0,4	0,68	22 x 30	ECS2WBZ820M◇◇△△2230
		1 990	1 592	0,15	0,5	0,73	25 x 25	ECS2WBZ101M◇◇△△2525
	100	1 990	1 592	0,15	0,5	0,73	25 x 25	ECS2WBZ101M◇◇△△2525
		1 658	1 327	0,15	0,5	0,80	22 x 35	ECS2WBZ121M◇◇△△2235
	120	1 658	1 327	0,15	0,5	0,83	25 x 30	ECS2WBZ121M◇◇△△2530
		1 327	1 062	0,15	0,7	0,95	22 x 45	ECS2WBZ151M◇◇△△2245
	150	1 327	1 062	0,15	0,7	0,95	25 x 35	ECS2WBZ151M◇◇△△2535
		1 106	885	0,15	0,8	1,1	25 x 40	ECS2WBZ181M◇◇△△2540
	180	1 106	885	0,15	0,8	1,1	30 x 30	ECS2WBZ181M◇◇△△3030
		905	724	0,15	1,0	1,2	25 x 45	ECS2WBZ221M◇◇△△2545
	220	905	724	0,15	1,0	1,3	30 x 35	ECS2WBZ221M◇◇△△3035
		905	724	0,15	1,0	1,3	30 x 35	ECS2WBZ221M◇◇△△3035
	270	737	590	0,15	1,2	1,5	30 x 40	ECS2WBZ271M◇◇△△3040
		330	603	480	0,15	1,5	1,7	30 x 45
	390	511	409	0,15	1,5	1,9	35 x 40	ECS2WBZ391M◇◇△△3540
	470	424	339	0,15	1,5	2,2	30 x 50	ECS2WBZ471M◇◇△△3050
	560	356	285	0,15	1,5	2,4	35 x 50	ECS2WBZ561M◇◇△△3550
680	293	235	0,15	1,5	2,8	35 x 55	ECS2WBZ681M◇◇△△3555	
820	243	194	0,15	1,5	3,2	35 x 60	ECS2WBZ821M◇◇△△3560	
1 000	133	107	0,15	1,5	4,2	35 x 70	ECS2WBZ102M◇◇△△3570	

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 85°C	Size øD x L (mm)	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 79
(V)	(µF)	(mΩ)	(mΩ)		(mA)	(Arms)		
<b>500</b> (550) 2H	100	1 990	1 592	0,15	0,5	0,90	25 x 30	ECS2HBZ101M◇◇△△2530
	120	1 658	1 327					

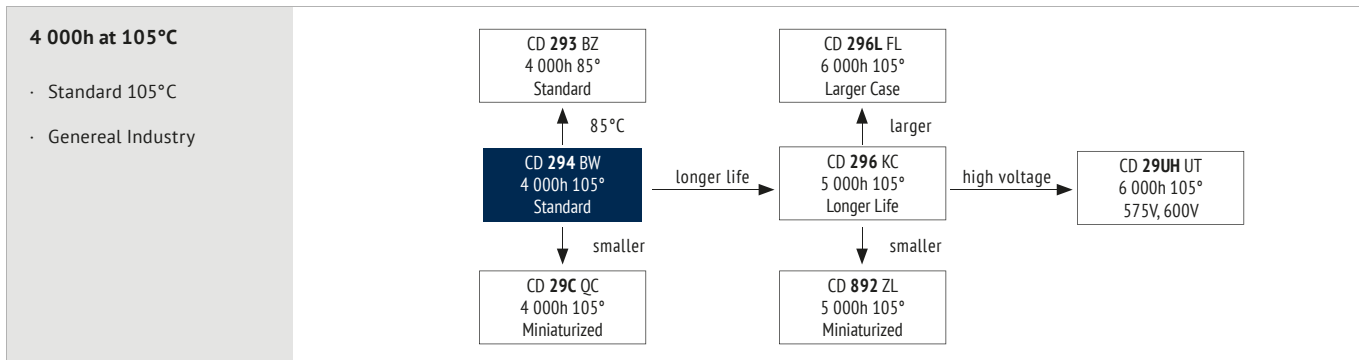

ITEM CHARACTERISTICS

Operating Temperature Range (°C)	-40 ~ +105	-25 ~ +105
Voltage Range (V)	16 ~ 100	160 ~ 550
Capacitance Range (µF)	39 ~ 47 000	
Capacitance Tolerance (20°C, 120Hz)	± 20%	

**!** The usage at lower temperatures than indicated may be possible. Please contact the Jianghai Europe sales office for approval.

Leakage Current: After 5 minutes at 20°C application of rated voltage, leakage current is not more than specified in table.

Stability at Low Temperature (Impedance Ratio at 120Hz)	Rated Voltage (V)	16 ~ 100	160 ~ 200	250 ~ 550
	$Z_{-25°C} / Z_{+20°C}$			4
$Z_{-40°C} / Z_{+20°C}$		15		-

Fast Charge-Discharge: **!** Please contact Jianghai for an appropriate choice of the capacitor or possible technical adaptations, esp. for applications like: Welding, Photoflash, Servo motors, X-Ray


ITEM	USEFUL LIFE		LOAD LIFE	ENDURANCE TEST	SHELF LIFE	
Lifetime	4 000h	> 180 000h	2 000h	3 000h	1 000h	
Leakage Current	Not more than specified value		Not more than specified value	Not more than specified value	Not more than specified value	
Capacitance Change	Within ± 30% of initial value		Within ± 20% of initial value	Within ± 20% of initial value	Within ± 20% of initial value	
Dissipation Factor	Not more than 300% of specified value		Not more than 200% of specified value	Not more than 200% of specified value	Not more than 200% of specified value	
Condition: Applied Voltage Applied Current Applied Temperature	$U_R$ $I_R$ 105°C	$U_R$ $1,4 \times I_R$ 40°C	$U_R$ $I_R$ 105°C	$U_R$ $I_R = 0$ 105°C IEC 60384	$U_R = 0$ $I_R = 0$ 105°C	After test: $U_R$ to be applied for 30 min > 24h before measurement

MULTIPLIER FOR RIPPLE CURRENT (FREQUENCY COEFFICIENT)

Frequency	50Hz	120Hz	300Hz	1kHz	10kHz	≥ 50 kHz
Rated Voltage (V) ≤ 100	0,95	1,00	1,07	1,13	1,19	1,20
160 ~ 250	0,87	1,00	1,17	1,32	1,45	1,50
≥ 315	0,80	1,00	1,16	1,30	1,41	1,43

Multipliers for typical operating conditions.

MULTIPLIER FOR LIFETIME (LIFETIME DIAGRAM)

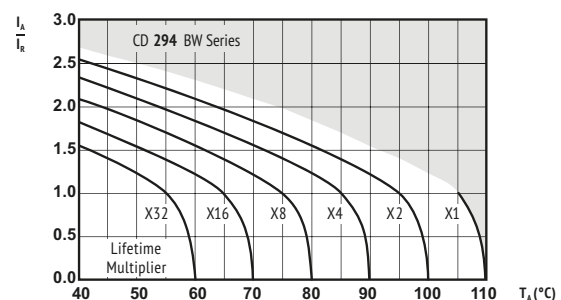

$I_A$  = actual ripple current at 120Hz,  
 $I_R$  = rated ripple current at 120Hz, 105°C  
 Multiplier of Useful Life as a function of ambient temperature & ripple current load

**!** Max. Current Snap-In Terminal: 15A. For more current use Lug-Terminals.

ENVIRONMENTAL

The products are RoHS, WEEE and REACH compliant. The detailed version please see separate "Environmental Certificates" document or www.jianghai-europe.com

**!** SAFETY FACTOR

This diagram includes a safety margin. In many cases the allowed current capability/lifetime may be increased. For details and approvals please contact the Jianghai Europe sales office.



U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance (μF)	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz (mΩ)	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz (mΩ)	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current (mA)	I <sub>RAC</sub> Rated Ripple Current 105°C 120Hz (Arms)	Size øD x L (mm)	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 79
<b>16</b> <b>(20)</b> <b>1C</b>	6 800	98	68	0,50	1,1	1,60	22 x 25	ECS1CBW682M◇◇△△2225
		67	46	0,50	1,5	1,99	22 x 30	ECS1CBW103M◇◇△△2230
	10 000	67	46	0,50	1,5	1,99	25 x 25	ECS1CBW103M◇◇△△2525
		56	39	0,50	1,5	2,28	22 x 35	ECS1CBW123M◇◇△△2235
	12 000	56	39	0,50	1,5	2,30	25 x 30	ECS1CBW123M◇◇△△2530
		56	39	0,50	1,5	2,38	30 x 25	ECS1CBW123M◇◇△△3025
	15 000	45	31	0,50	1,5	2,64	22 x 40	ECS1CBW153M◇◇△△2240
		45	31	0,50	1,5	2,68	25 x 35	ECS1CBW153M◇◇△△2535
	18 000	37	26	0,50	1,5	2,98	22 x 45	ECS1CBW183M◇◇△△2245
		37	26	0,50	1,5	3,04	25 x 40	ECS1CBW183M◇◇△△2540
		37	26	0,50	1,5	3,00	30 x 30	ECS1CBW183M◇◇△△3030
	22 000	37	26	0,50	1,5	3,10	35 x 25	ECS1CBW183M◇◇△△3525
		31	21	0,50	1,5	3,40	25 x 45	ECS1CBW223M◇◇△△2545
	27 000	31	21	0,50	1,5	3,39	30 x 35	ECS1CBW223M◇◇△△3035
		25	17	0,50	1,5	3,81	25 x 50	ECS1CBW273M◇◇△△2550
	33 000	25	17	0,50	1,5	3,83	30 x 40	ECS1CBW273M◇◇△△3040
		25	17	0,50	1,5	3,74	35 x 30	ECS1CBW273M◇◇△△3530
	39 000	21	14	0,50	1,5	4,30	30 x 45	ECS1CBW333M◇◇△△3045
		21	14	0,50	1,5	4,24	35 x 35	ECS1CBW333M◇◇△△3535
	47 000	18	12	0,50	1,5	4,74	30 x 50	ECS1CBW393M◇◇△△3050
18		12	0,50	1,5	4,72	35 x 40	ECS1CBW393M◇◇△△3540	
	15	10	0,50	1,5	5,27	35 x 45	ECS1CBW473M◇◇△△3545	

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance (μF)	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz (mΩ)	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz (mΩ)	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current (mA)	I <sub>RAC</sub> Rated Ripple Current 105°C 120Hz (Arms)	Size øD x L (mm)	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 79
<b>25</b> <b>(32)</b> <b>1E</b>	4 700	113	79	0,40	1,2	1,55	22 x 25	ECS1EBW472M◇◇△△2225
		79	55	0,40	1,5	1,91	22 x 30	ECS1EBW682M◇◇△△2230
	6 800	79	55	0,40	1,5	1,91	25 x 25	ECS1EBW682M◇◇△△2525
		65	45	0,40	1,5	2,14	22 x 35	ECS1EBW822M◇◇△△2235
	8 200	65	45	0,40	1,5	2,16	25 x 30	ECS1EBW822M◇◇△△2530
		65	45	0,40	1,5	2,25	30 x 25	ECS1EBW822M◇◇△△3025
	10 000	54	37	0,40	1,5	2,40	22 x 40	ECS1EBW103M◇◇△△2240
		54	37	0,40	1,5	2,44	25 x 35	ECS1EBW103M◇◇△△2535
	12 000	45	31	0,40	1,5	2,69	22 x 45	ECS1EBW123M◇◇△△2245
		45	31	0,40	1,5	2,74	25 x 40	ECS1EBW123M◇◇△△2540
		45	31	0,40	1,5	2,70	30 x 30	ECS1EBW123M◇◇△△3030
	15 000	45	31	0,40	1,5	2,80	35 x 25	ECS1EBW123M◇◇△△3525
		36	25	0,40	1,5	3,15	25 x 45	ECS1EBW153M◇◇△△2545
	18 000	36	25	0,40	1,5	3,13	30 x 35	ECS1EBW153M◇◇△△3035
		36	25	0,40	1,5	3,22	35 x 30	ECS1EBW153M◇◇△△3530
	22 000	30	21	0,40	1,5	3,54	25 x 50	ECS1EBW183M◇◇△△2550
		30	21	0,40	1,5	3,54	30 x 40	ECS1EBW183M◇◇△△3040
	27 000	25	17	0,40	1,5	4,24	30 x 45	ECS1EBW223M◇◇△△3045
		25	17	0,40	1,5	3,96	35 x 35	ECS1EBW223M◇◇△△3535
	33 000	20	14	0,40	1,5	4,75	35 x 45	ECS1EBW273M◇◇△△3545
17		11	0,40	1,5	5,39	35 x 50	ECS1EBW333M◇◇△△3550	

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance (μF)	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz (mΩ)	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz (mΩ)	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current (mA)	I <sub>RAC</sub> Rated Ripple Current 105°C 120Hz (Arms)	Size øD x L (mm)	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 79
<b>35</b> <b>(44)</b> <b>1V</b>	3 300	141	99	0,35	1,2	1,43	22 x 25	ECS1VBW332M◇◇△△2225
		120	83	0,35	1,4	1,65	22 x 30	ECS1VBW392M◇◇△△2230
	3 900	120	83	0,35	1,4	1,65	25 x 25	ECS1VBW392M◇◇△△2525
		99	69	0,35	1,5	1,78	25 x 25	ECS1VBW472M◇◇△△2525
	5 600	83	58	0,35	1,5	2,02	22 x 35	ECS1VBW562M◇◇△△2235
		83	58	0,35	1,5	2,04	25 x 30	ECS1VBW562M◇◇△△2530
	6 800	83	58	0,35	1,5	2,12	30 x 25	ECS1VBW562M◇◇△△3025
		69	48	0,35	1,5	2,28	22 x 40	ECS1VBW682M◇◇△△2240
	8 200	69	48	0,35	1,5	2,31	25 x 35	ECS1VBW682M◇◇△△2535
		57	40	0,35	1,5	2,67	22 x 50	ECS1VBW822M◇◇△△2250
	10 000	57	40	0,35	1,5	2,60	25 x 40	ECS1VBW822M◇◇△△2540
		57	40	0,35	1,5	2,56	30 x 30	ECS1VBW822M◇◇△△3030
	12 000	57	40	0,35	1,5	2,78	35 x 25	ECS1VBW822M◇◇△△3525
		47	33	0,35	1,5	2,92	25 x 45	ECS1VBW103M◇◇△△2545
	15 000	47	33	0,35	1,5	2,92	30 x 35	ECS1VBW103M◇◇△△3035
		39	27	0,35	1,5	3,26	25 x 50	ECS1VBW123M◇◇△△2550
	18 000	39	27	0,35	1,5	3,28	30 x 40	ECS1VBW123M◇◇△△3040
		39	27	0,35	1,5	3,20	35 x 30	ECS1VBW123M◇◇△△3530
	22 000	31	22	0,35	1,5	3,74	30 x 45	ECS1VBW153M◇◇△△3045
		31	22	0,35	1,5	3,69	35 x 35	ECS1VBW153M◇◇△△3535
	26	18	0,35	1,5	4,16	35 x 40	ECS1VBW183M◇◇△△3540	
	22	15	0,35	1,5	4,92	35 x 50	ECS1VBW223M◇◇△△3550	

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance (μF)	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz (mΩ)	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz (mΩ)	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current (mA)	I <sub>RAC</sub> Rated Ripple Current 105°C 120Hz (Arms)	Size øD x L (mm)	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 79
<b>50</b> <b>(63)</b> <b>1H</b>	1 800	222	155	0,30	0,9	1,31	22 x 25	ECS1HBW182M◇◇△△2225
		220	181	127	0,30	1,1	1,45	22 x 30
	2 700	148	103	0,30	1,4	1,70	22 x 30	ECS1HBW272M◇◇△△2230
		148	103	0,30	1,4	1,70	25 x 25	ECS1HBW272M◇◇△△2525
	3 300	121	84	0,30	1,5	1,98	22 x 35	ECS1HBW332M◇◇△△2235
		121	84	0,30	1,5	2,00	25 x 30	ECS1HBW332M◇◇△△2530
	3 900	103	72	0,30	1,5	2,25	22 x 40	ECS1HBW392M◇◇△△2240
		103	72	0,30	1,5	2,28	25 x 35	ECS1HBW392M◇◇△△2535
	4 700	103	72	0,30	1,5	2,22	30 x 25	ECS1HBW392M◇◇△△3025
		85	59	0,30	1,5	2,56	22 x 45	ECS1HBW472M◇◇△△2245
		85	59	0,30	1,5	2,58	30 x 30	ECS1HBW472M◇◇△△3030
	5 600	85	59	0,30	1,5	2,67	35 x 25	ECS1HBW472M◇◇△△3525
		72	50	0,30	1,5	2,89	22 x 50	ECS1HBW562M◇◇△△2250
	6 800	72	50	0,30	1,5	2,81	25 x 40	ECS1HBW562M◇◇△△2540
		72	50	0,30	1,5	2,95	30 x 35	ECS1HBW562M◇◇△△3035
	8 200	59	41	0,30	1,5	3,37	25 x 50	ECS1HBW682M◇◇△△2550
		59	41	0,30	1,5	3,39	30 x 40	ECS1HBW682M◇◇△△3040
	10 000	59	41	0,30	1,5	3,31	35 x 30	ECS1HBW682M◇◇△△3530
		49	34	0,30	1,5	3,71	30 x 45	ECS1HBW822M◇◇△△3045
	12 000	49	34	0,30	1,5	3,66	35 x 35	ECS1HBW822M◇◇△△3535
40		28	0,30	1,5	4,09	30 x 50	ECS1HBW103M◇◇△△3050	
	40	28	0,30	1,5	4,07	35 x 40	ECS1HBW103M◇◇△△3540	
	34	23	0,30	1,5	4,50	35 x 45	ECS1HBW123M◇◇△△3545	

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance (μF)	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz (mΩ)	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz (mΩ)	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current (mA)	I <sub>RAC</sub> Rated Ripple Current 105°C 120Hz (Arms)	Size øD x L (mm)	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 79
<b>63</b> <b>(79)</b> <b>1J</b>	1 200	222	155	0,20	0,8	1,25	22 x 25	ECS1JBW122M◇◇△△2225
		148	103	0,20	1,1	1,52	22 x 30	ECS1JBW182M◇◇△△2230
	1 800	148	103	0,20	1,1	1,52	25 x 25	ECS1JBW182M◇◇△△2525
		121	84	0,20	1,4	1,73	22 x 35	ECS1JBW222M◇◇△△2235
	2 700	121	84	0,20	1,4	1,75	25 x 30	ECS1JBW222M◇◇△△2530
		99	69	0,20	1,5	1,97	22 x 40	ECS1JBW272M◇◇△△2240
	3 300	99	69	0,20	1,5	1,99	25 x 35	ECS1JBW272M◇◇△△2535
		99	69	0,20	1,5	1,93	30 x 25	ECS1JBW272M◇◇△△3025
	3 900	81	56	0,20	1,5	2,32	22 x 50	ECS1JBW332M◇◇△△2250
		81	56	0,20	1,5	2,27	25 x 40	ECS1JBW332M◇◇△△2540
	4 700	81	56	0,20	1,5	2,24	30 x 30	ECS1JBW332M◇◇△△3030
		81	56	0,20	1,5	2,41	35 x 25	ECS1JBW332M◇◇△△3525
	5 600	69	48	0,20	1,5	2,54	25 x 45	ECS1JBW392M◇◇△△2545
		69	48	0,20	1,5	2,55	30 x 35	ECS1JBW392M◇◇△△3035
	6 800	57	40	0,20	1,5	2,88	25 x 50	ECS1JBW472M◇◇△△2550
		57	40	0,20	1,5	2,90	30 x 40	ECS1JBW472M◇◇△△3040
	8 200	57	40	0,20	1,5	2,83	35 x 30	ECS1JBW472M◇◇△△3530
		48	33	0,20	1,5	3,28	30 x 45	ECS1JBW562M◇◇△△3045
	10 000	48	33	0,20	1,5	3,24	35 x 35	ECS1JBW562M◇◇△△3535
		40	27	0,20	1,5	3,73	30 x 50	ECS1JBW682M◇◇△△3050
12 000	40	27	0,20	1,5	3,71	35 x 40	ECS1JBW682M◇◇△△3540	
	33	23	0,20	1,5	4,16	35 x 45	ECS1JBW822M◇◇△△3545	
	27	19	0,20	1,5	4,69	35 x 50	ECS1JBW103M◇◇△△3550	

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance (μF)	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz (mΩ)	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz (mΩ)	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> <
---	---	---	---	---	---------------------

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance (µF)	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz (mΩ)	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz (mΩ)	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current (mA)	I <sub>RAC</sub> Rated Ripple Current 105°C 105Hz (Arms)	Size øD x L (mm)	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 79
80 (100) 1K	3 900	69	48	0,20	1,5	3,12	30 x 45	ECS1KBW392M◇◇△△3045
		69	48	0,20	1,5	3,07	35 x 35	ECS1KBW392M◇◇△△3535
	4 700	57	40	0,20	1,5	3,56	30 x 50	ECS1KBW472M◇◇△△3050
		57	40	0,20	1,5	3,50	35 x 40	ECS1KBW472M◇◇△△3540
	5 600	48	33	0,20	1,5	3,87	35 x 45	ECS1KBW562M◇◇△△3545
	6 800	40	27	0,20	1,5	4,19	35 x 50	ECS1KBW682M◇◇△△3550

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance (µF)	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz (mΩ)	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz (mΩ)	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current (mA)	I <sub>RAC</sub> Rated Ripple Current 105°C 105Hz (Arms)	Size øD x L (mm)	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 79
100 (125) 2A	560	474	332	0,20	0,6	1,07	22 x 25	ECS2ABW561M◇◇△△2225
	820	324	227	0,20	0,8	1,35	22 x 30	ECS2ABW821M◇◇△△2230
	820	324	227	0,20	0,8	1,35	25 x 25	ECS2ABW821M◇◇△△2525
	1 000	266	186	0,20	1,0	1,54	22 x 35	ECS2ABW102M◇◇△△2235
		266	186	0,20	1,0	1,56	25 x 30	ECS2ABW102M◇◇△△2530
	1 200	221	155	0,20	1,2	1,74	22 x 40	ECS2ABW122M◇◇△△2240
		222	155	0,20	1,2	1,76	25 x 35	ECS2ABW122M◇◇△△2535
	1 500	222	155	0,20	1,2	1,71	30 x 25	ECS2ABW122M◇◇△△3025
		177	124	0,20	1,5	1,99	22 x 45	ECS2ABW152M◇◇△△2245
		177	124	0,20	1,5	2,03	25 x 40	ECS2ABW152M◇◇△△2540
		177	124	0,20	1,5	2,00	30 x 30	ECS2ABW152M◇◇△△3030
	1 800	148	103	0,20	1,5	2,07	35 x 25	ECS2ABW152M◇◇△△3525
		148	103	0,20	1,5	2,28	25 x 45	ECS2ABW182M◇◇△△2545
	2 200	148	103	0,20	1,5	2,27	30 x 35	ECS2ABW182M◇◇△△3035
		121	84	0,20	1,5	2,57	25 x 50	ECS2ABW222M◇◇△△2550
	2 700	121	84	0,20	1,5	2,59	30 x 40	ECS2ABW222M◇◇△△3040
		99	69	0,20	1,5	2,94	30 x 45	ECS2ABW272M◇◇△△3045
	3 300	99	69	0,20	1,5	2,90	35 x 35	ECS2ABW272M◇◇△△3535
		81	56	0,20	1,5	3,32	30 x 50	ECS2ABW332M◇◇△△3050
	3 900	81	56	0,20	1,5	3,31	35 x 40	ECS2ABW332M◇◇△△3540
4 700	69	48	0,20	1,5	3,69	35 x 45	ECS2ABW392M◇◇△△3545	
4 700	57	40	0,20	1,5	4,14	35 x 50	ECS2ABW472M◇◇△△3550	

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance (µF)	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz (mΩ)	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz (mΩ)	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current (mA)	I <sub>RAC</sub> Rated Ripple Current 105°C 105Hz (Arms)	Size øD x L (mm)	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 79
160 (200) 2C	330	603	422	0,15	0,5	1,16	22 x 25	ECS2CBW331M◇◇△△2225
	390	511	357	0,15	0,6	1,43	22 x 30	ECS2CBW391M◇◇△△2230
	470	424	296	0,15	0,8	1,52	22 x 35	ECS2CBW471M◇◇△△2235
		424	296	0,15	0,8	1,55	25 x 25	ECS2CBW471M◇◇△△2525
	560	356	249	0,15	0,9	1,62	22 x 40	ECS2CBW561M◇◇△△2240
		356	249	0,15	0,9	1,73	25 x 30	ECS2CBW561M◇◇△△2530
	680	293	205	0,15	1,1	1,70	22 x 45	ECS2CBW681M◇◇△△2245
		293	205	0,15	1,1	1,81	25 x 35	ECS2CBW681M◇◇△△2535
		293	205	0,15	1,1	1,82	30 x 25	ECS2CBW681M◇◇△△3025
	820	243	170	0,15	1,3	1,81	22 x 50	ECS2CBW821M◇◇△△2250
		243	170	0,15	1,3	1,98	25 x 40	ECS2CBW821M◇◇△△2540
		243	170	0,15	1,3	1,98	30 x 30	ECS2CBW821M◇◇△△3030
		243	170	0,15	1,3	1,93	35 x 25	ECS2CBW821M◇◇△△3525
	1 000	199	139	0,15	1,5	2,04	25 x 45	ECS2CBW102M◇◇△△2545
		199	139	0,15	1,5	2,14	30 x 35	ECS2CBW102M◇◇△△3035
	1 200	166	116	0,15	1,5	2,12	25 x 50	ECS2CBW122M◇◇△△2550
		166	116	0,15	1,5	2,22	30 x 40	ECS2CBW122M◇◇△△3040
	1 500	166	116	0,15	1,5	2,40	35 x 30	ECS2CBW122M◇◇△△3530
		133	93	0,15	1,5	2,46	30 x 45	ECS2CBW152M◇◇△△3045
	1 800	133	93	0,15	1,5	2,53	35 x 35	ECS2CBW152M◇◇△△3535
2 200	111	77	0,15	1,5	2,98	35 x 45	ECS2CBW182M◇◇△△3545	
2 700	91	63	0,15	1,5	3,10	35 x 50	ECS2CBW222M◇◇△△3550	
2 700	74	51	0,15	1,5	3,77	35 x 55	ECS2CBW272M◇◇△△3555	
3 300	61	42	0,15	1,5	4,33	35 x 60	ECS2CBW332M◇◇△△3560	

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance (µF)	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz (mΩ)	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz (mΩ)	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current (mA)	I <sub>RAC</sub> Rated Ripple Current 105°C 105Hz (Arms)	Size øD x L (mm)	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 79
200 (250) 2D	220	905	633	0,15	0,4	1,08	22 x 25	ECS2DBW221M◇◇△△2225
	270	737	516	0,15	0,5	1,20	22 x 30	ECS2DBW271M◇◇△△2230
	330	603	422	0,15	0,7	1,30	22 x 30	ECS2DBW331M◇◇△△2230
		603	422	0,15	0,7	1,35	25 x 25	ECS2DBW331M◇◇△△2525
	390	511	357	0,15	0,8	1,41	22 x 35	ECS2DBW391M◇◇△△2235
		424	296	0,15	0,9	1,50	22 x 40	ECS2DBW471M◇◇△△2240
	470	424	296	0,15	0,9	1,47	25 x 30	ECS2DBW471M◇◇△△2530
		424	296	0,15	0,9	1,56	30 x 25	ECS2DBW471M◇◇△△3025
	560	356	249	0,15	1,1	1,58	22 x 45	ECS2DBW561M◇◇△△2245
		356	249	0,15	1,1	1,65	25 x 35	ECS2DBW561M◇◇△△2535
	680	293	205	0,15	1,4	1,68	22 x 50	ECS2DBW681M◇◇△△2250
		293	205	0,15	1,4	1,80	25 x 40	ECS2DBW681M◇◇△△2540
		293	205	0,15	1,4	1,82	30 x 30	ECS2DBW681M◇◇△△3030
		293	205	0,15	1,4	1,96	35 x 25	ECS2DBW681M◇◇△△3525

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance (µF)	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz (mΩ)	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz (mΩ)	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current (mA)	I <sub>RAC</sub> Rated Ripple Current 105°C 105Hz (Arms)	Size øD x L (mm)	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 79
200 (250) 2D	820	243	170	0,15	1,5	1,87	25 x 50	ECS2DBW821M◇◇△△2550
		243	170	0,15	1,5	1,99	30 x 35	ECS2DBW821M◇◇△△3035
		243	170	0,15	1,5	2,07	35 x 30	ECS2DBW821M◇◇△△3530
	1 000	199	139	0,15	1,5	2,17	30 x 45	ECS2DBW102M◇◇△△3045
		199	139	0,15	1,5	2,22	35 x 35	ECS2DBW102M◇◇△△3535
	1 200	166	116	0,15	1,5	2,22	30 x 50	ECS2DBW122M◇◇△△3050
		166	116	0,15	1,5	2,42	35 x 40	ECS2DBW122M◇◇△△3540
	1 500	133	93	0,15	1,5	2,59	35 x 45	ECS2DBW152M◇◇△△3545
	1 800	111	77	0,15	1,5	2,70	35 x 50	ECS2DBW182M◇◇△△3550
	2 200	91	63	0,15	1,5	3,23	35 x 60	ECS2DBW222M◇◇△△3560

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance (µF)	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz (mΩ)	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz (mΩ)	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current (mA)	I <sub>RAC</sub> Rated Ripple Current 105°C 105Hz (Arms)	Size øD x L (mm)	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 79
250 (300) 2E	180	1 106	774	0,15	0,5	0,94	22 x 25	ECS2EBW181M◇◇△△2225
	220	905	633	0,15	0,6	1,10	22 x 30	ECS2EBW221M◇◇△△2230
		905	633	0,15	0,6	1,15	25 x 25	ECS2EBW221M◇◇△△2525
	270	737	516	0,15	0,7	1,13	22 x 35	ECS2EBW271M◇◇△△2235
		603	422	0,15	0,8	1,20	22 x 40	ECS2EBW331M◇◇△△2240
	330	603	422	0,15	0,8	1,30	25 x 30	ECS2EBW331M◇◇△△2530
		603	422	0,15	0,8	1,35	30 x 25	ECS2EBW331M◇◇△△3025
	390	511	357	0,15	1,0	1,26	22 x 45	ECS2EBW391M◇◇△△2245
		511	357	0,15	1,0	1,41	25 x 35	ECS2EBW391M◇◇△△2535
	470	424	296	0,15	1,2	1,37	22 x 50	ECS2EBW471M◇◇△△2250
		424	296	0,15	1,2	1,52	25 x 40	ECS2EBW471M◇◇△△2540
		424	296	0,15	1,2	1,36	30 x 30	ECS2EBW471M◇◇△△3030
		424	296	0,15	1,2	1,40	35 x 25	ECS2EBW471M◇◇△△3525
	560	356	249	0,15	1,4	1,59	25 x 45	ECS2EBW561M◇◇△△2545
		356	249	0,15	1,4	1,57	30 x 35	ECS2EBW561M◇◇△△3035
	680	356	249	0,15	1,4	1,56	35 x 30	ECS2EBW561M◇◇△△3530
		293	205	0,15	1,5	1,66	25 x 50	ECS2EBW681M◇◇△△2550
	820	293	205	0,15	1,5	1,76	30 x 40	ECS2EBW681M◇◇△△3040
		243	170	0,15	1,5	1,83	30 x 45	ECS2EBW821M◇◇△△3045
	1 000	243	170	0,15	1,5	1,82	35 x 35	ECS2EBW821M◇◇△△3535
199		139	0,15	1,5	1,87	30 x 50	ECS2EBW102M◇◇△△3050	
1 200	199	139	0,15	1,5	1,99	35 x 40	ECS2EBW102M◇◇△△3540	
1 500	166	116	0,15	1,5	2,10	35 x 45	ECS2EBW122M◇◇△△3545	
1 800	133	93	0,15	1,5	2,70	35 x 50	ECS2EBW152M◇◇△△3550	
1 800	111	77	0,15	1,5	2,92	35 x 60	ECS2EBW182M◇◇△△3560	

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance (µF)	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz (mΩ)	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz (mΩ)	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current (mA)	I <sub>RAC</sub> Rated Ripple Current 105°C 105Hz (Arms)	Size øD x L (mm)	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 79
315 (365) 2F	100	1 990	1 095	0,15	0,3	0,61	22 x 25	ECS2FBW101M◇◇△△2225
	120	1 659	912	0,15	0,4	0,68	22 x 30	ECS2FBW121M◇◇△△2230
	150	1 327	730	0,15	0,5	0,76	22 x 35	ECS2FBW151M◇◇△△2235
		1 327	730	0,15	0,5	0,78	25 x 25	ECS2FBW151M◇◇△△2525

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 105°C 120Hz	Size øD x L (mm)	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 79
(V)	(µF)	(mΩ)	(mΩ)		(mA)	(Arms)	(mm)	
<b>350</b> (400) 2V	180	1 106	608	0,15	0,6	0,81	22 x 45	ECS2VBW181M◇◇△△2245
		1 106	608	0,15	0,6	0,89	25 x 35	ECS2VBW181M◇◇△△2535
		1 106	608	0,15	0,6	0,90	30 x 30	ECS2VBW181M◇◇△△3030
	220	905	498	0,15	0,8	0,93	22 x 50	ECS2VBW221M◇◇△△2250
		905	498	0,15	0,8	0,97	25 x 40	ECS2VBW221M◇◇△△2540
		905	498	0,15	0,8	0,98	35 x 25	ECS2VBW221M◇◇△△3525
	270	737	406	0,15	0,9	1,01	25 x 50	ECS2VBW271M◇◇△△2550
		737	406	0,15	0,9	1,05	30 x 35	ECS2VBW271M◇◇△△3035
		737	406	0,15	0,9	1,01	35 x 30	ECS2VBW271M◇◇△△3530
	330	603	332	0,15	1,2	1,16	30 x 45	ECS2VBW331M◇◇△△3045
		603	332	0,15	1,2	1,16	35 x 35	ECS2VBW331M◇◇△△3535
	390	511	281	0,15	1,4	1,26	30 x 50	ECS2VBW391M◇◇△△3050
		511	281	0,15	1,4	1,26	35 x 40	ECS2VBW391M◇◇△△3540
	470	424	233	0,15	1,5	1,35	35 x 45	ECS2VBW471M◇◇△△3545
		424	233	0,15	1,5	1,35	35 x 45	ECS2VBW471M◇◇△△3545
	560	356	196	0,15	1,5	1,51	35 x 50	ECS2VBW561M◇◇△△3550
680	293	161	0,15	1,5	1,92	35 x 55	ECS2VBW681M◇◇△△3555	
820	243	133	0,15	1,5	2,25	35 x 60	ECS2VBW821M◇◇△△3560	
1 000	199	139	0,15	1,5	2,50	35 x 60	ECS2VBW102M◇◇△△3560	


U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 105°C 120Hz	Size øD x L (mm)	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 79
(V)	(µF)	(mΩ)	(mΩ)		(mA)	(Arms)	(mm)	
<b>400</b> (450) 2G	68	2 926	1 522	0,15	0,3	0,47	22 x 25	ECS2GBW680M◇◇△△2225
	82	2 427	1 262	0,15	0,3	0,56	22 x 25	ECS2GBW820M◇◇△△2225
	100	1 990	1 035	0,15	0,4	0,60	22 x 30	ECS2GBW101M◇◇△△2230
	120	1 658	863	0,15	0,5	0,64	22 x 35	ECS2GBW121M◇◇△△2235
		1 658	863	0,15	0,5	0,70	25 x 25	ECS2GBW121M◇◇△△2525
	150	1 327	690	0,15	0,6	0,70	22 x 40	ECS2GBW151M◇◇△△2240
		1 327	690	0,15	0,6	0,73	25 x 30	ECS2GBW151M◇◇△△2530
	180	1 106	575	0,15	0,7	0,78	22 x 45	ECS2GBW181M◇◇△△2245
		1 106	575	0,15	0,7	0,82	25 x 35	ECS2GBW181M◇◇△△2535
	220	905	471	0,15	0,9	0,87	25 x 40	ECS2GBW221M◇◇△△2540
		905	471	0,15	0,9	0,86	30 x 30	ECS2GBW221M◇◇△△3030
	270	737	383	0,15	1,1	0,94	25 x 45	ECS2GBW271M◇◇△△2545
		737	383	0,15	1,1	0,95	30 x 35	ECS2GBW271M◇◇△△3035
	330	603	314	0,15	1,3	1,11	30 x 40	ECS2GBW331M◇◇△△3040
		603	314	0,15	1,3	1,13	35 x 30	ECS2GBW331M◇◇△△3530
	390	511	265	0,15	1,5	1,15	30 x 45	ECS2GBW391M◇◇△△3045
511		265	0,15	1,5	1,26	35 x 35	ECS2GBW391M◇◇△△3535	
470	424	220	0,15	1,5	1,31	35 x 40	ECS2GBW471M◇◇△△3540	
560	356	185	0,15	1,5	1,50	35 x 45	ECS2GBW561M◇◇△△3545	
680	293	153	0,15	1,5	1,90	35 x 50	ECS2GBW681M◇◇△△3550	
820	243	126	0,15	1,5	2,20	35 x 60	ECS2GBW821M◇◇△△3560	
	243	126	0,15	1,5	2,20	40 x 50	ECS2GBW821M◇◇△△4050	
1 000	199	139	0,15	1,5	2,60	35 x 65	ECS2GBW102M◇◇△△3565	

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 105°C 120Hz	Size øD x L (mm)	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 79
(V)	(µF)	(mΩ)	(mΩ)		(mA)	(Arms)	(mm)	
<b>420</b> (470) 2X	68	3 901	1 951	0,20	0,3	0,50	22 x 25	ECS2XBW680M◇◇△△2225
	82	3 235	1 618	0,20	0,3	0,60	22 x 30	ECS2XBW820M◇◇△△2230
	100	2 653	1 327	0,20	0,4	0,65	22 x 35	ECS2XBW101M◇◇△△2235
	120	2 211	1 106	0,20	0,5	0,70	22 x 40	ECS2XBW121M◇◇△△2240
		2 211	1 106	0,20	0,5	0,72	25 x 30	ECS2XBW121M◇◇△△2530
	150	1 769	885	0,20	0,6	0,75	22 x 45	ECS2XBW151M◇◇△△2245
		1 769	885	0,20	0,6	0,80	25 x 35	ECS2XBW151M◇◇△△2535
	180	1 474	737	0,20	0,8	0,85	25 x 40	ECS2XBW181M◇◇△△2540
		1 474	737	0,20	0,8	0,85	30 x 30	ECS2XBW181M◇◇△△3030
	220	1 206	603	0,20	0,9	0,90	25 x 45	ECS2XBW221M◇◇△△2545
		1 206	603	0,20	0,9	0,96	30 x 35	ECS2XBW221M◇◇△△3035
	270	983	492	0,20	1,1	1,05	25 x 50	ECS2XBW271M◇◇△△2550
		983	492	0,20	1,1	1,06	30 x 40	ECS2XBW271M◇◇△△3040
	330	804	402	0,20	1,4	1,14	30 x 45	ECS2XBW331M◇◇△△3045
		804	402	0,20	1,4	1,20	35 x 35	ECS2XBW331M◇◇△△3535
	390	681	340	0,20	1,5	1,25	30 x 50	ECS2XBW391M◇◇△△3050
681		340	0,20	1,5	1,26	35 x 40	ECS2XBW391M◇◇△△3540	
470	565	282	0,20	1,5	1,31	35 x 45	ECS2XBW471M◇◇△△3545	
560	474	237	0,20	1,5	1,50	35 x 50	ECS2XBW561M◇◇△△3550	
680	391	196	0,20	1,5	1,90	35 x 55	ECS2XBW681M◇◇△△3555	

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 105°C 120Hz	Size øD x L (mm)	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 79
(V)	(µF)	(mΩ)	(mΩ)		(mA)	(Arms)	(mm)	
<b>450</b> (500) 2W	820	324	162	0,20	1,5	2,20	35 x 60	ECS2XBW821M◇◇△△3560
	56	4 737	2 370	0,20	0,3	0,47	22 x 25	ECS2WBW560M◇◇△△2225
		3 901	1 951	0,20	0,3	0,56	22 x 30	ECS2WBW680M◇◇△△2230
	68	3 901	1 951	0,20	0,3	0,56	25 x 25	ECS2WBW680M◇◇△△2525
		3 235	1 618	0,20	0,4	0,65	22 x 35	ECS2WBW820M◇◇△△2235
	82	2 653	1 327	0,20	0,5	0,70	22 x 40	ECS2WBW101M◇◇△△2240
		2 653	1 327	0,20	0,5	0,70	25 x 30	ECS2WBW101M◇◇△△2530
	100	2 211	1 106	0,20	0,5	0,73	22 x 45	ECS2WBW121M◇◇△△2245
		2 211	1 106	0,20	0,5	0,73	25 x 35	ECS2WBW121M◇◇△△2535
	120	1 769	885	0,20	0,7	0,78	22 x 50	ECS2WBW151M◇◇△△2250
		1 769	885	0,20	0,7	0,82	25 x 40	ECS2WBW151M◇◇△△2540
	150	1 474	737	0,20	0,8	0,83	30 x 30	ECS2WBW151M◇◇△△3030
		1 474	737	0,20	0,8	0,87	25 x 45	ECS2WBW181M◇◇△△2545
	180	1 206	603	0,20	1,0	0,94	25 x 50	ECS2WBW221M◇◇△△2550
		1 206	603	0,20	1,0	0,95	30 x 40	ECS2WBW221M◇◇△△3040
	220	1 206	603	0,20	1,0	0,91	35 x 30	ECS2WBW221M◇◇△△3530
983		492	0,20	1,2	1,11	30 x 45	ECS2WBW271M◇◇△△3045	
270	983	492	0,20	1,2	1,13	35 x 35	ECS2WBW271M◇◇△△3535	
	804	402	0,20	1,5	1,15	30 x 50	ECS2WBW331M◇◇△△3050	
330	804	402	0,20	1,5	1,26	35 x 40	ECS2WBW331M◇◇△△3540	
	681	340	0,20	1,5	1,31	35 x 45	ECS2WBW391M◇◇△△3545	
390	565	282	0,20	1,5	1,50	35 x 50	ECS2WBW391M◇◇△△3550	
	474	237	0,20	1,5	1,70	35 x 55	ECS2WBW561M◇◇△△3555	
560	391	196	0,20	1,5	2,00	35 x 60	ECS2WBW681M◇◇△△3560	
	391	196	0,20	1,5	2,00	40 x 50	ECS2WBW681M◇◇△△4050	
680	324	162	0,20	1,5	2,20	35 x 65	ECS2WBW821M◇◇△△3565	
	324	162	0,20	1,5	2,30	40 x 60	ECS2WBW821M◇◇△△4060	
1 000	265	139	0,20	1,5	2,60	35 x 70	ECS2WBW102M◇◇△△3570	

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 105°C 120Hz	Size øD x L (mm)	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 79
(V)	(µF)	(mΩ)	(mΩ)		(mA)	(Arms)	(mm)	
<b>500</b> (550) 2H	39	6 802	3 401	0,20	0,2	0,35	22 x 25	ECS2HBW390M◇◇△△2225
	47	5 644	2 822	0,20	0,2	0,41	22 x 30	ECS2HBW470M◇◇△△2230
	56	4 739	2 370	0,20	0,3	0,47	22 x 35	ECS2HBW560M◇◇△△2235
	68	3 901	1 951	0,20	0,3	0,54	22 x 40	ECS2HBW680M◇◇△△2240
		3 237	1 618	0,20	0,4	0,62	25 x 30	ECS2HBW820M◇◇△△2530
	82	2 653	1 327	0,20	0,5	0,67	25 x 35	ECS2HBW101M◇◇△△2535
		2 211	1 106	0,20	0,6	0,77	25 x 40	ECS2HBW121M◇◇△△2540
	100	2 211	1 106	0,20	0,6	0,72	30 x 30	ECS2HBW121M◇◇△△3030
		1 769	885	0,20	0,8	0,85	30 x 40	ECS2HBW151M◇◇△△3040
	120	1 769	885	0,20	0,8	0,85	30 x 40	ECS2HBW151M◇◇△△3040
		1 474	737	0,20	0,9	1,01	30 x 45	ECS2HBW181M◇◇△△3045
	150	1 206	603	0,20	1,1	1,12	35 x 35	ECS2HBW221M◇◇△△3535
		1 206	603	0,20	1,1	1,12	35 x 35	ECS2HBW221M◇◇△△3535
	180	983	472	0,20	1,4	1,29	35 x 40	ECS2HBW271M◇◇△△3540
		804	402	0,20	1,5	1,40	35 x 45	ECS2HBW331M◇◇△△3545
	220	390	681	340	0,20	1,5	1,60	35 x 50
470		565	282	0,20	1,5	1,80	35 x 60	ECS2HBW471M◇◇△△3560
270	560	474	237	0,20	1,5	1,90	35 x 65	



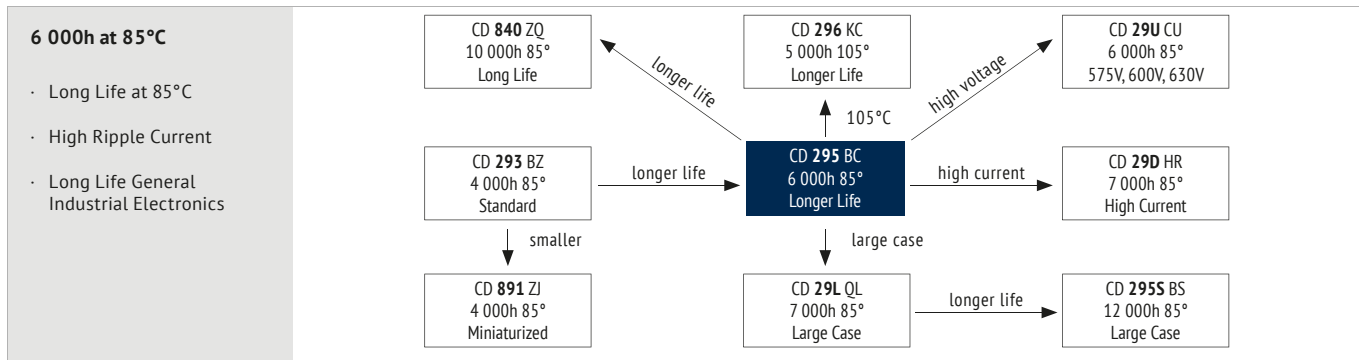

**ITEM CHARACTERISTICS**

Operating Temperature Range (°C)	-40 ~ +85	-25 ~ +85	The usage at lower temperatures than indicated may be possible. Please contact the Jianghai Europe sales office for approval. Additionally please ask for series CD 295D ZD with temperature range -55°C ~ +85°C and 10 000h useful life.
Voltage Range (V)	10 ~ 400	420 ~ 500	
Capacitance Range (µF)	68 ~ 22 000		
Capacitance Tolerance (20°C, 120Hz)	± 20%		

Leakage Current After 5 minutes at 20°C application of rated voltage, leakage current is not more than specified in table.

Stability at Low Temperature (Impedance Ratio at 120Hz)	Rated Voltage (V)	10	16 ~ 35	50 ~ 100	160 ~ 200	250 ~ 400	420 ~ 500
	Z <sub>-25°C</sub> / Z <sub>+20°C</sub>		5	4	3	3	4
Z <sub>-40°C</sub> / Z <sub>+20°C</sub>		18	15	10	6	8	-

Fast Charge-Discharge Please contact Jianghai for an appropriate choice of the capacitor or possible technical adaptations, esp. for applications like: Welding, Photoflash, Servo motors, X-Ray


ITEM	USEFUL LIFE		LOAD LIFE	ENDURANCE TEST	SHELF LIFE	
Lifetime	6 000h	> 100 000h	5 000h	5 000h	1 000h	
Leakage Current	Not more than specified value		Not more than specified value	Not more than specified value	Not more than specified value	
Capacitance Change	Within ± 30% of initial value		Within ± 20% of initial value	Within ± 20% of initial value	Within ± 20% of initial value	
Dissipation Factor	Not more than 300% of specified value		Not more than 200% of specified value	Not more than 200% of specified value	Not more than 200% of specified value	
Condition:						
Applied Voltage	U <sub>R</sub>	U <sub>R</sub>	U <sub>R</sub>	U <sub>R</sub>	U <sub>R</sub> = 0	After test: U <sub>R</sub> to be applied for 30 min > 24h before measurement
Applied Current	I <sub>R</sub>	1,2 x I <sub>R</sub>	I <sub>R</sub>	I <sub>R</sub> = 0	I <sub>R</sub> = 0	
Applied Temperature	85°C	40°C	85°C	85°C	85°C	
				IEC 60384		

**MULTIPLIER FOR RIPPLE CURRENT (FREQUENCY COEFFICIENT)**

Rated Voltage (V) \ Frequency	50Hz	120Hz	300Hz	1kHz	10kHz	100kHz
≤ 50	0,88	1,00	1,07	1,15	1,15	1,15
63 ~ 100	0,80	1,00	1,17	1,32	1,45	1,50
≥ 160	0,80	1,00	1,16	1,30	1,41	1,43

Multipliers for typical operating conditions.

**MULTIPLIER FOR LIFETIME (LIFETIME DIAGRAM)**

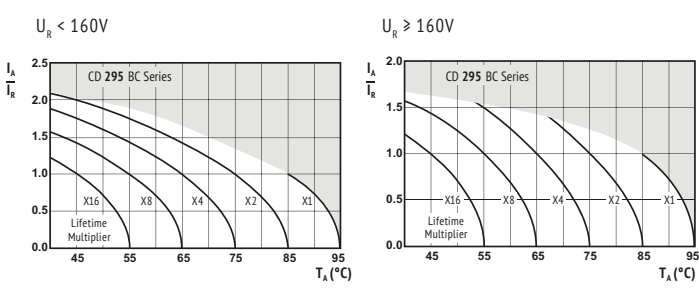

I<sub>A</sub> = actual ripple current at 120Hz, I<sub>R</sub> = rated ripple current at 120Hz, 85°C  
 Multiplier of Useful Life as a function of ambient temperature & ripple current load

Max. Current Snap-In Terminal: 15A. For more current use Lug-Terminals.

**ENVIRONMENTAL**

The products are RoHS, WEEE and REACH compliant. The detailed version please see separate "Environmental Certificates" document or www.jianghai-europe.com

**SAFETY FACTOR**

This diagram includes a safety margin. In many cases the allowed current capability/lifetime may be increased. For details and approvals please contact the Jianghai Europe sales office.

SNAP-IN

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance (μF)	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz (mΩ)	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz (mΩ)	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current (mA)	I <sub>RAC</sub> Rated Ripple Current 85°C 120Hz (Arms)	Size øD x L (mm)	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 79	
<b>10</b> (13) 1A	10 000	107	74	0,80	1,0	2,5	22 x 25	ECS1ABC103M◇◇△△2225	
	12 000	89	62	0,80	1,2	2,7	22 x 25	ECS1ABC123M◇◇△△2225	
	15 000	71	50	0,80	1,5	3,2	22 x 30	ECS1ABC153M◇◇△△2230	
		71	50	0,80	1,5	3,1	25 x 25	ECS1ABC153M◇◇△△2525	
	18 000	59	41	0,80	1,5	3,6	22 x 35	ECS1ABC183M◇◇△△2235	
		59	41	0,80	1,5	3,6	25 x 30	ECS1ABC183M◇◇△△2530	
	22 000	49	34	0,80	1,5	4,0	22 x 40	ECS1ABC223M◇◇△△2240	
		49	34	0,80	1,5	4,1	25 x 35	ECS1ABC223M◇◇△△2535	
		49	34	0,80	1,5	4,1	30 x 25	ECS1ABC223M◇◇△△3025	
	<b>16</b> (20) 1C	8 200	98	68	0,60	1,3	2,2	22 x 25	ECS1CBC822M◇◇△△2225
		10 000	80	56	0,60	1,5	2,6	22 x 30	ECS1CBC103M◇◇△△2230
			80	56	0,60	1,5	2,6	25 x 25	ECS1CBC103M◇◇△△2525
12 000		67	46	0,60	1,5	2,9	22 x 35	ECS1CBC123M◇◇△△2235	
15 000		54	37	0,60	1,5	3,3	22 x 40	ECS1CBC153M◇◇△△2240	
		54	37	0,60	1,5	3,3	25 x 30	ECS1CBC153M◇◇△△2530	
18 000		54	37	0,60	1,5	3,4	30 x 25	ECS1CBC153M◇◇△△3025	
		45	31	0,60	1,5	3,8	22 x 45	ECS1CBC183M◇◇△△2245	
22 000		45	31	0,60	1,5	3,7	25 x 35	ECS1CBC183M◇◇△△2535	
		37	25	0,60	1,5	4,2	22 x 50	ECS1CBC223M◇◇△△2250	
		37	25	0,60	1,5	4,2	25 x 40	ECS1CBC223M◇◇△△2540	
37		25	0,60	1,5	4,2	30 x 30	ECS1CBC223M◇◇△△3030		
	37	25	0,60	1,5	4,4	35 x 25	ECS1CBC223M◇◇△△3525		
<b>25</b> (32) 1E	5 600	119	83	0,50	1,4	2,0	22 x 25	ECS1EBC562M◇◇△△2225	
	6 800	98	68	0,50	1,5	2,3	22 x 30	ECS1EBC682M◇◇△△2230	
		98	68	0,50	1,5	2,3	25 x 25	ECS1EBC682M◇◇△△2525	
	8 200	81	57	0,50	1,5	2,6	22 x 35	ECS1EBC822M◇◇△△2235	
		67	46	0,50	1,5	2,9	22 x 40	ECS1EBC103M◇◇△△2240	
	10 000	67	46	0,50	1,5	2,8	25 x 30	ECS1EBC103M◇◇△△2530	
		67	46	0,50	1,5	3,0	30 x 25	ECS1EBC103M◇◇△△3025	
	12 000	56	39	0,50	1,5	3,3	22 x 45	ECS1EBC123M◇◇△△2245	
		56	39	0,50	1,5	3,2	25 x 35	ECS1EBC123M◇◇△△2535	
	15 000	56	39	0,50	1,5	3,4	30 x 30	ECS1EBC123M◇◇△△3030	
		45	31	0,50	1,5	3,7	25 x 40	ECS1EBC153M◇◇△△2540	
	18 000	45	31	0,50	1,5	3,9	35 x 25	ECS1EBC153M◇◇△△3525	
37		26	0,50	1,5	4,3	25 x 50	ECS1EBC183M◇◇△△2550		
22 000	37	26	0,50	1,5	4,2	30 x 35	ECS1EBC183M◇◇△△3035		
	37	26	0,50	1,5	4,4	35 x 30	ECS1EBC183M◇◇△△3530		
	31	21	0,50	1,5	4,8	30 x 40	ECS1EBC223M◇◇△△3040		
31	21	0,50	1,5	5,0	35 x 35	ECS1EBC223M◇◇△△3535			
<b>35</b> (44) 1V	3 300	161	113	0,40	1,2	1,8	22 x 25	ECS1VBC332M◇◇△△2225	
	3 900	137	95	0,40	1,4	2,1	22 x 30	ECS1VBC392M◇◇△△2230	
	4 700	113	79	0,40	1,5	2,2	25 x 25	ECS1VBC472M◇◇△△2525	
		95	66	0,40	1,5	2,3	22 x 35	ECS1VBC562M◇◇△△2235	
	5 600	95	66	0,40	1,5	2,3	25 x 30	ECS1VBC562M◇◇△△2530	
		79	55	0,40	1,5	2,9	22 x 40	ECS1VBC682M◇◇△△2240	
	6 800	79	55	0,40	1,5	2,6	25 x 35	ECS1VBC682M◇◇△△2535	
		79	55	0,40	1,5	2,7	30 x 25	ECS1VBC682M◇◇△△3025	
	8 200	65	45	0,40	1,5	2,8	22 x 50	ECS1VBC822M◇◇△△2250	
		65	45	0,40	1,5	2,8	25 x 40	ECS1VBC822M◇◇△△2540	
		65	45	0,40	1,5	2,8	30 x 30	ECS1VBC822M◇◇△△3030	
	10 000	65	45	0,40	1,5	2,9	35 x 25	ECS1VBC822M◇◇△△3525	
54		37	0,40	1,5	3,1	25 x 45	ECS1VBC103M◇◇△△2545		
54		37	0,40	1,5	3,2	30 x 35	ECS1VBC103M◇◇△△3035		
12 000	45	31	0,40	1,5	3,5	25 x 50	ECS1VBC123M◇◇△△2550		
	45	31	0,40	1,5	3,5	30 x 40	ECS1VBC123M◇◇△△3040		
15 000	45	31	0,40	1,5	3,6	35 x 30	ECS1VBC123M◇◇△△3530		
	36	25	0,40	1,5	4,1	30 x 45	ECS1VBC153M◇◇△△3045		
18 000	36	25	0,40	1,5	4,1	35 x 35	ECS1VBC153M◇◇△△3535		
	30	21	0,40	1,5	4,6	30 x 50	ECS1VBC183M◇◇△△3050		
30	21	0,40	1,5	4,7	35 x 40	ECS1VBC183M◇◇△△3540			
22 000	25	17	0,40	1,5	5,3	35 x 45	ECS1VBC223M◇◇△△3545		
<b>50</b> (63) 1H	2 200	181	127	0,30	1,1	1,7	22 x 25	ECS1HBC222M◇◇△△2225	
	2 700	148	103	0,30	1,4	1,9	22 x 30	ECS1HBC272M◇◇△△2230	
		148	103	0,30	1,4	1,9	25 x 25	ECS1HBC272M◇◇△△2525	

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance (μF)	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz (mΩ)	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz (mΩ)	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current (mA)	I <sub>RAC</sub> Rated Ripple Current 85°C 120Hz (Arms)	Size øD x L (mm)	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 79
<b>50</b> (63) 1H	3 300	121	85	0,30	1,5	2,0	22 x 30	ECS1HBC332M◇◇△△2230
	3 900	103	72	0,30	1,5	2,1	22 x 35	ECS1HBC392M◇◇△△2235
		103	72	0,30	1,5	2,1	25 x 30	ECS1HBC392M◇◇△△2530
	4 700	85	59	0,30	1,5	2,4	22 x 40	ECS1HBC472M◇◇△△2240
		85	59	0,30	1,5	2,4	25 x 35	ECS1HBC472M◇◇△△2535
	5 600	72	50	0,30	1,5	2,5	22 x 50	ECS1HBC562M◇◇△△2250
		72	50	0,30	1,5	2,5	25 x 40	ECS1HBC562M◇◇△△2540
		72	50	0,30	1,5	2,5	30 x 30	ECS1HBC562M◇◇△△3030
	6 800	72	50	0,30	1,5	2,6	35 x 25	ECS1HBC562M◇◇△△3525
		59	41	0,30	1,5	2,8	25 x 45	ECS1HBC682M◇◇△△2545
	8 200	59	41	0,30	1,5	2,8	30 x 35	ECS1HBC682M◇◇△△3035
		49	34	0,30	1,5	3,2	25 x 50	ECS1HBC822M◇◇△△2550
10 000	49	34	0,30	1,5	3,0	30 x 40	ECS1HBC822M◇◇△△3040	
	49	34	0,30	1,5	3,0	35 x 30	ECS1HBC822M◇◇△△3530	
12 000	40	28	0,30	1,5	3,4	30 x 45	ECS1HBC103M◇◇△△3045	
	40	28	0,30	1,5	3,4	35 x 35	ECS1HBC103M◇◇△△3535	
15 000	34	23	0,30	1,5	3,8	30 x 50	ECS1HBC123M◇◇△△3050	
	34	23	0,30	1,5	3,8	35 x 40	ECS1HBC123M◇◇△△3540	
27	15	0,30	1,5	4,5	35 x 50	ECS1HBC153M◇◇△△3550		
<b>63</b> (79) 1J	1 500	177	124	0,20	0,9	1,6	22 x 25	ECS1JBC152M◇◇△△2225
	1 800	148	103	0,20	1,1	1,8	22 x 25	ECS1JBC182M◇◇△△2225
		121	84	0,20	1,4	2,0	22 x 30	ECS1JBC222M◇◇△△2230
	2 200	121	84	0,20	1,4	2,0	25 x 25	ECS1JBC222M◇◇△△2525
		99	69	0,20	1,5	2,2	22 x 35	ECS1JBC272M◇◇△△2235
	2 700	99	69	0,20	1,5	2,3	25 x 30	ECS1JBC272M◇◇△△2530
		81	56	0,20	1,5	2,3	22 x 40	ECS1JBC332M◇◇△△2240
	3 300	81	56	0,20	1,5	2,3	25 x 35	ECS1JBC332M◇◇△△2535
		81	56	0,20	1,5	2,3	30 x 25	ECS1JBC332M◇◇△△3025
	3 900	69	48	0,20	1,5	2,5	22 x 45	ECS1JBC392M◇◇△△2245
		69	48	0,20	1,5	2,6	25 x 40	ECS1JBC392M◇◇△△2540
		69	48	0,20	1,5	2,6	30 x 30	ECS1JBC392M◇◇△△3030
4 700	69	48	0,20	1,5	2,7	35 x 25	ECS1JBC392M◇◇△△3525	
	57	40	0,20	1,5	2,9	30 x 30	ECS1JBC472M◇◇△△3030	
5 600	48	33	0,20	1,5	3,1	25 x 45	ECS1JBC562M◇◇△△2545	
	48	33	0,20	1,5	3,2	30 x 35	ECS1JBC562M◇◇△△3035	
6 800	48	33	0,20	1,5	3,3	35 x 30	ECS1JBC562M◇◇△△3530	
	40	27	0,20	1,5	3,6	30 x 40	ECS1JBC682M◇◇△△3040	
8 200	40	27	0,20	1,5	3,7	35 x 35	ECS1JBC682M◇◇△△3535	
	33	23	0,20	1,5	3,7	30 x 50	ECS1JBC822M◇◇△△3050	
33	23	0,20	1,5	3,8	35 x 40	ECS1JBC822M◇◇△△3540		
10 000	27	19	0,20	1,5	4,3	35 x 45	ECS1JBC103M◇◇△△3545	
12 000	23	16	0,20	1,5	4,8	35 x 50	ECS1JBC123M◇◇△△3550	
<b>80</b> (100) 1K	1 000	266	186	0,20	0,8	1,3	22 x 25	ECS1KBC102M◇◇△△2225
	1 200	222	155	0,20	1,0	1,5	22 x 30	ECS1KBC122M◇◇△△2230
		177	124	0,20	1,2	1,7	25 x 25	ECS1KBC152M◇◇△△2525
	1 500	148	103	0,20	1,4	1,9	22 x 35	ECS1KBC182M◇◇△△2235
		148	103	0,20	1,4	1,9	25 x 30	ECS1KBC182M◇◇△△2530
	2 200	121	84	0,20	1,5	2,1	22 x 40	ECS1KBC222M◇◇△△2240
		121	84	0,20	1,5	2,2	25 x 35	ECS1KBC222M◇◇△△2535
	2 700	121	84	0,20	1,5	2,2	30 x 25	ECS1KBC222M◇◇△△3025
		99	69	0,20	1,5	2,5	22 x 50	ECS1KBC272M◇◇△△2250
		99	69	0,20	1,5	2,5	25 x 40	ECS1KBC272M◇◇△△2540
	3 300	99	69	0,20	1,5	2,5	30 x 30	ECS1KBC272M◇◇△△3030
		99	69	0,20	1,5	2,5	35 x 25	ECS1KBC272M◇◇△△3525
3 900	81	56	0,20	1,5	2,8	25 x 45	ECS1KBC332M◇◇△△2545	
	81	56	0,20	1,5	2,8	30 x 35	ECS1KBC332M◇◇△△3035	
4 700	69	48	0,20	1,5	3,1	25 x 50	ECS1KBC392M◇◇△△2550	
	69	48	0,20	1,5	3,2	30 x 40	ECS1KBC392M◇◇△△3040	
5 600	69	48	0,20	1,5	3,2	35 x 30	ECS1KBC392M◇◇△△3530	
	57	40	0,20	1,5	3,6	30 x 45	ECS1KBC472M◇◇△△3045	
6 800	57	40	0,20	1,5				

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 85°C 120Hz	Size øD x L (mm)	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 79
(V)	(µF)	(mΩ)	(mΩ)		(mA)	(Arms)	(mm)	
100 (125) 2A	680	391	273	0,20	0,7	1,1	22 x 25	ECS2ABC681M◇◇△△2225
	820	324	227	0,20	0,8	1,2	22 x 30	ECS2ABC821M◇◇△△2230
	1 000	266	186	0,20	1,0	1,4	25 x 25	ECS2ABC102M◇◇△△2525
	1 200	222	155	0,20	1,2	1,6	22 x 35	ECS2ABC122M◇◇△△2235
		222	155	0,20	1,2	1,6	25 x 30	ECS2ABC122M◇◇△△2530
	1 500	177	124	0,20	1,5	1,8	22 x 40	ECS2ABC152M◇◇△△2240
		177	124	0,20	1,5	1,7	25 x 35	ECS2ABC152M◇◇△△2535
		177	124	0,20	1,5	1,8	30 x 25	ECS2ABC152M◇◇△△3025
	1 800	148	103	0,20	1,5	2,1	22 x 50	ECS2ABC182M◇◇△△2250
		148	103	0,20	1,5	2,0	25 x 40	ECS2ABC182M◇◇△△2540
		148	103	0,20	1,5	2,1	30 x 30	ECS2ABC182M◇◇△△3030
		148	103	0,20	1,5	2,2	35 x 25	ECS2ABC182M◇◇△△3525
	2 200	121	84	0,20	1,5	2,2	25 x 45	ECS2ABC222M◇◇△△2545
		121	84	0,20	1,5	2,3	30 x 35	ECS2ABC222M◇◇△△3035
		121	84	0,20	1,5	2,5	35 x 30	ECS2ABC222M◇◇△△3530
	2 700	99	69	0,20	1,5	2,6	25 x 50	ECS2ABC272M◇◇△△2550
		99	69	0,20	1,5	2,7	30 x 40	ECS2ABC272M◇◇△△3040
	3 300	81	56	0,20	1,5	3,0	30 x 45	ECS2ABC332M◇◇△△3045
		81	56	0,20	1,5	3,1	35 x 35	ECS2ABC332M◇◇△△3535
	3 900	69	48	0,20	1,5	3,4	30 x 50	ECS2ABC392M◇◇△△3050
69		48	0,20	1,5	3,4	35 x 40	ECS2ABC392M◇◇△△3540	
4 700	57	40	0,20	1,5	4,0	35 x 50	ECS2ABC472M◇◇△△3550	

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 85°C 120Hz	Size øD x L (mm)	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 79
(V)	(µF)	(mΩ)	(mΩ)		(mA)	(Arms)	(mm)	
160 (200) 2C	220	905	633	0,15	0,4	1,0	22 x 25	ECS2CBC221M◇◇△△2225
	270	737	516	0,15	0,4	1,1	22 x 25	ECS2CBC271M◇◇△△2225
	330	603	422	0,15	0,5	1,3	22 x 25	ECS2CBC331M◇◇△△2225
	390	511	357	0,15	0,6	1,5	22 x 30	ECS2CBC391M◇◇△△2230
		511	357	0,15	0,6	1,5	25 x 25	ECS2CBC391M◇◇△△2525
	470	424	297	0,15	0,8	1,7	25 x 25	ECS2CBC471M◇◇△△2525
	560	356	249	0,15	0,9	1,9	22 x 35	ECS2CBC561M◇◇△△2235
		356	249	0,15	0,9	1,9	25 x 30	ECS2CBC561M◇◇△△2530
		356	249	0,15	0,9	2,0	30 x 25	ECS2CBC561M◇◇△△3025
	680	293	205	0,15	1,1	2,1	22 x 40	ECS2CBC681M◇◇△△2240
		293	205	0,15	1,1	2,2	25 x 35	ECS2CBC681M◇◇△△2535
	820	243	170	0,15	1,3	2,5	22 x 50	ECS2CBC821M◇◇△△2250
		243	170	0,15	1,3	2,4	25 x 40	ECS2CBC821M◇◇△△2540
		243	170	0,15	1,3	2,5	30 x 30	ECS2CBC821M◇◇△△3030
		243	170	0,15	1,3	2,4	35 x 25	ECS2CBC821M◇◇△△3525
	1 000	199	139	0,15	1,5	2,7	25 x 45	ECS2CBC102M◇◇△△2545
		199	139	0,15	1,5	2,8	30 x 35	ECS2CBC102M◇◇△△3035
		199	139	0,15	1,5	2,7	35 x 30	ECS2CBC102M◇◇△△3530
	1 200	166	116	0,15	1,5	3,1	25 x 50	ECS2CBC122M◇◇△△2550
		166	116	0,15	1,5	3,2	30 x 40	ECS2CBC122M◇◇△△3040
1 500	133	93	0,15	1,5	3,7	30 x 45	ECS2CBC152M◇◇△△3045	
	133	93	0,15	1,5	3,5	35 x 40	ECS2CBC152M◇◇△△3540	
1 800	111	77	0,15	1,5	3,9	35 x 45	ECS2CBC182M◇◇△△3545	
2 200	91	63	0,15	1,5	4,5	35 x 50	ECS2CBC222M◇◇△△3550	

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 85°C 120Hz	Size øD x L (mm)	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 79
(V)	(µF)	(mΩ)	(mΩ)		(mA)	(Arms)	(mm)	
180 (225) 2K	270	737	516	0,15	0,5	1,2	22 x 25	ECS2KBC271M◇◇△△2225
	330	603	422	0,15	0,6	1,4	22 x 30	ECS2KBC331M◇◇△△2230
	390	511	357	0,15	0,7	1,5	25 x 25	ECS2KBC391M◇◇△△2525
	470	424	296	0,15	0,8	1,7	22 x 35	ECS2KBC471M◇◇△△2235
		424	296	0,15	0,8	1,7	25 x 30	ECS2KBC471M◇◇△△2530
		424	296	0,15	0,8	1,8	30 x 25	ECS2KBC471M◇◇△△3025
	560	356	249	0,15	1,0	1,9	22 x 40	ECS2KBC561M◇◇△△2240
		356	249	0,15	1,0	2,0	25 x 35	ECS2KBC561M◇◇△△2535
	680	293	205	0,15	1,2	2,3	22 x 50	ECS2KBC681M◇◇△△2250
		293	205	0,15	1,2	2,2	25 x 40	ECS2KBC681M◇◇△△2540
		293	205	0,15	1,2	2,3	30 x 30	ECS2KBC681M◇◇△△3030
		293	205	0,15	1,2	2,2	35 x 25	ECS2KBC681M◇◇△△3525
	820	243	170	0,15	1,5	2,5	25 x 45	ECS2KBC821M◇◇△△2545
		243	170	0,15	1,5	2,6	30 x 35	ECS2KBC821M◇◇△△3035
		243	170	0,15	1,5	2,5	35 x 30	ECS2KBC821M◇◇△△3530
	1 000	199	139	0,15	1,5	2,9	25 x 50	ECS2KBC102M◇◇△△2550
		199	139	0,15	1,5	2,9	30 x 40	ECS2KBC102M◇◇△△3040
		166	116	0,15	1,5	3,3	30 x 45	ECS2KBC122M◇◇△△3045
	1 200	166	116	0,15	1,5	3,1	35 x 35	ECS2KBC122M◇◇△△3535
		133	93	0,15	1,5	3,6	35 x 45	ECS2KBC152M◇◇△△3545
1 500	133	93	0,15	1,5	3,6	35 x 45	ECS2KBC152M◇◇△△3545	
1 800	111	77	0,15	1,5	4,1	35 x 50	ECS2KBC182M◇◇△△3550	


U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 85°C 120Hz	Size øD x L (mm)	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 79
(V)	(µF)	(mΩ)	(mΩ)		(mA)	(Arms)	(mm)	
200 (250) 2D	220	905	633	0,15	0,4	1,1	22 x 25	ECS2DBC221M◇◇△△2225
	270	737	516	0,15	0,5	1,2	22 x 25	ECS2DBC271M◇◇△△2225
	330	603	422	0,15	0,7	1,4	22 x 30	ECS2DBC331M◇◇△△2230
		603	422	0,15	0,7	1,4	25 x 25	ECS2DBC331M◇◇△△2525
	390	511	357	0,15	0,8	1,6	22 x 35	ECS2DBC391M◇◇△△2235
		511	357	0,15	0,8	1,6	25 x 30	ECS2DBC391M◇◇△△2530
		424	296	0,15	0,9	1,8	22 x 40	ECS2DBC471M◇◇△△2240
	470	424	296	0,15	0,9	1,9	30 x 25	ECS2DBC471M◇◇△△3025
		356	249	0,15	1,1	2,0	22 x 45	ECS2DBC561M◇◇△△2245
	560	356	249	0,15	1,1	2,0	25 x 35	ECS2DBC561M◇◇△△2535
		356	249	0,15	1,1	2,1	30 x 30	ECS2DBC561M◇◇△△3030
		356	249	0,15	1,1	2,0	35 x 25	ECS2DBC561M◇◇△△3525
		293	205	0,15	1,4	2,3	25 x 40	ECS2DBC681M◇◇△△2540
	680	293	205	0,15	1,4	2,4	30 x 35	ECS2DBC681M◇◇△△3035
		243	170	0,15	1,5	2,6	25 x 50	ECS2DBC821M◇◇△△2550
	820	243	170	0,15	1,5	2,7	30 x 40	ECS2DBC821M◇◇△△3040
		243	170	0,15	1,5	2,5	35 x 30	ECS2DBC821M◇◇△△3530
	1 000	199	139	0,15	1,5	3,1	30 x 45	ECS2DBC102M◇◇△△3045
		199	139	0,15	1,5	2,8	35 x 35	ECS2DBC102M◇◇△△3535
	1 200	166	116	0,15	1,5	3,4	30 x 50	ECS2DBC122M◇◇△△3050
166		116	0,15	1,5	3,2	35 x 40	ECS2DBC122M◇◇△△3540	
1 500	133	93	0,15	1,5	3,8	35 x 50	ECS2DBC152M◇◇△△3550	

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 85°C 120Hz	Size øD x L (mm)	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 79
(V)	(µF)	(mΩ)	(mΩ)		(mA)	(Arms)	(mm)	
250 (300) 2E	100	1990	1393	0,15	0,3	0,72	22 x 25	ECS2EBC101M◇◇△△2225
	180	1106	774	0,15	0,5	0,94	22 x 25	ECS2EBC181M◇◇△△2225
	220	905	633	0,15	0,6	1,1	22 x 30	ECS2EBC221M◇◇△△2230
		905	633	0,15	0,6	1,1	25 x 25	ECS2EBC221M◇◇△△2525
	270	737	516	0,15	0,7	1,2	22 x 35	ECS2EBC271M◇◇△△2235
		603	422	0,15	0,8	1,4	22 x 40	ECS2EBC331M◇◇△△2240
		603	422	0,15	0,8	1,4	25 x 30	ECS2EBC331M◇◇△△2530
	330	603	422	0,15	0,8	1,5	30 x 25	ECS2EBC331M◇◇△△3025
		511	357	0,15	1,0	1,6	22 x 45	ECS2EBC391M◇◇△△2245
	390	511	357	0,15	1,0	1,6	25 x 35	ECS2EBC391M◇◇△△2535
		424	296	0,15	1,2	1,8	22 x 50	ECS2EBC471M◇◇△△2250
		424	296	0,15	1,2	1,8	25 x 40	ECS2EBC471M◇◇△△2540
		424	296	0,15	1,2	1,8	30 x 30	ECS2EBC471M◇◇△△3030
	470	424	296	0,15	1,2	1,9	35 x 25	ECS2EBC471M◇◇△△3525
		356	249	0,15	1,4	2,0	25 x 45	ECS2EBC561M◇◇△△2545
		356	249	0,15	1,4	2,0	30 x 35	ECS2EBC561M◇◇△△3035
	560	293	205	0,15	1,5	2,3	30 x 40	ECS2EBC681M◇◇△△3040
		293	205	0,15	1,5	2,4	35 x 30	ECS2EBC681M◇◇△△3530
	680	243	170	0,15	1,5	2,6	30 x 45	ECS2EBC821M◇◇△△3045
		243	170	0,15	1,5	2,6	35 x 35	ECS2EBC821M◇◇△△3535
199		139	0,15	1,5	3,0	35 x 40	ECS2EBC102M◇◇△△3540	
1 200	166	116	0,15	1,5	3,4	35 x 45	ECS2EBC122M◇◇△△3545	

U <sub>RDC</sub> (Surge Voltage) Code
---

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 85°C 120Hz	Size øD x L	ORDER CODE
(V)	(µF)	(mΩ)	(mΩ)	(mA)	(Arms)	(mm)	Details: Page 79	
<b>350</b> <b>(400)</b> <b>2V</b>	82	2427	1699	0,15	0,3	0,64	22 x 25	ECS2VBC820M $\diamond\diamond\Delta\Delta$ 2225
	100	1990	1393	0,15	0,4	0,72	22 x 25	ECS2VBC101M $\diamond\diamond\Delta\Delta$ 2225
	120	1658	1161	0,15	0,4	0,82	22 x 30	ECS2VBC121M $\diamond\diamond\Delta\Delta$ 2230
		1658	1161	0,15	0,4	0,81	25 x 25	ECS2VBC121M $\diamond\diamond\Delta\Delta$ 2525
	150	1327	929	0,15	0,5	0,94	22 x 35	ECS2VBC151M $\diamond\diamond\Delta\Delta$ 2235
		1327	929	0,15	0,5	0,94	25 x 30	ECS2VBC151M $\diamond\diamond\Delta\Delta$ 2530
	180	1106	774	0,15	0,6	1,1	22 x 40	ECS2VBC181M $\diamond\diamond\Delta\Delta$ 2240
		1106	774	0,15	0,6	1,1	30 x 25	ECS2VBC181M $\diamond\diamond\Delta\Delta$ 3025
	220	905	633	0,15	0,8	1,2	22 x 45	ECS2VBC221M $\diamond\diamond\Delta\Delta$ 2245
		905	633	0,15	0,8	1,2	25 x 35	ECS2VBC221M $\diamond\diamond\Delta\Delta$ 2535
		905	633	0,15	0,8	1,2	30 x 30	ECS2VBC221M $\diamond\diamond\Delta\Delta$ 3030
	270	905	633	0,15	0,8	1,3	35 x 25	ECS2VBC221M $\diamond\diamond\Delta\Delta$ 3525
		737	516	0,15	0,9	1,4	25 x 45	ECS2VBC271M $\diamond\diamond\Delta\Delta$ 2545
	330	737	516	0,15	0,9	1,4	30 x 35	ECS2VBC271M $\diamond\diamond\Delta\Delta$ 3035
		603	422	0,15	1,2	1,6	25 x 50	ECS2VBC331M $\diamond\diamond\Delta\Delta$ 2550
	390	603	422	0,15	1,2	1,6	35 x 30	ECS2VBC331M $\diamond\diamond\Delta\Delta$ 3530
		511	357	0,15	1,4	1,7	30 x 40	ECS2VBC391M $\diamond\diamond\Delta\Delta$ 3040
	470	511	357	0,15	1,4	1,8	35 x 35	ECS2VBC391M $\diamond\diamond\Delta\Delta$ 3535
		424	296	0,15	1,5	2,0	30 x 45	ECS2VBC471M $\diamond\diamond\Delta\Delta$ 3045
	560	424	296	0,15	1,5	2,0	35 x 40	ECS2VBC471M $\diamond\diamond\Delta\Delta$ 3540
560		356	249	0,15	1,5	2,3	35 x 45	ECS2VBC561M $\diamond\diamond\Delta\Delta$ 3545
680	293	205	0,15	1,5	2,6	35 x 50	ECS2VBC681M $\diamond\diamond\Delta\Delta$ 3550	
<b>400</b> <b>(450)</b> <b>2G</b>	68	2926	2049	0,15	0,3	0,55	22 x 25	ECS2GBC680M $\diamond\diamond\Delta\Delta$ 2225
	82	2427	1699	0,15	0,3	0,60	22 x 25	ECS2GBC820M $\diamond\diamond\Delta\Delta$ 2225
	100	1990	1393	0,15	0,4	0,70	22 x 30	ECS2GBC101M $\diamond\diamond\Delta\Delta$ 2230
		1990	1393	0,15	0,4	0,70	25 x 25	ECS2GBC101M $\diamond\diamond\Delta\Delta$ 2525
	120	1658	1161	0,15	0,5	0,79	22 x 35	ECS2GBC121M $\diamond\diamond\Delta\Delta$ 2235
		1327	929	0,15	0,6	0,90	22 x 40	ECS2GBC151M $\diamond\diamond\Delta\Delta$ 2240
	150	1327	929	0,15	0,6	0,89	25 x 30	ECS2GBC151M $\diamond\diamond\Delta\Delta$ 2530
		1327	929	0,15	0,6	0,95	30 x 25	ECS2GBC151M $\diamond\diamond\Delta\Delta$ 3025
	180	1106	774	0,15	0,7	1,0	22 x 45	ECS2GBC181M $\diamond\diamond\Delta\Delta$ 2245
		1106	774	0,15	0,7	1,0	25 x 35	ECS2GBC181M $\diamond\diamond\Delta\Delta$ 2535
		1106	774	0,15	0,7	1,1	30 x 30	ECS2GBC181M $\diamond\diamond\Delta\Delta$ 3030
	220	1106	774	0,15	0,7	1,2	35 x 25	ECS2GBC181M $\diamond\diamond\Delta\Delta$ 3525
		905	633	0,15	0,9	1,1	22 x 50	ECS2GBC221M $\diamond\diamond\Delta\Delta$ 2250
	270	905	633	0,15	0,9	1,2	25 x 40	ECS2GBC221M $\diamond\diamond\Delta\Delta$ 2540
		905	633	0,15	0,9	1,2	30 x 35	ECS2GBC221M $\diamond\diamond\Delta\Delta$ 3035
	330	737	516	0,15	1,1	1,3	25 x 45	ECS2GBC271M $\diamond\diamond\Delta\Delta$ 2545
		737	516	0,15	1,1	1,4	30 x 40	ECS2GBC271M $\diamond\diamond\Delta\Delta$ 3040
	390	737	516	0,15	1,1	1,6	35 x 30	ECS2GBC271M $\diamond\diamond\Delta\Delta$ 3530
		603	422	0,15	1,3	1,6	30 x 45	ECS2GBC331M $\diamond\diamond\Delta\Delta$ 3045
	470	603	422	0,15	1,3	1,7	35 x 35	ECS2GBC331M $\diamond\diamond\Delta\Delta$ 3535
511		357	0,15	1,5	1,8	30 x 50	ECS2GBC391M $\diamond\diamond\Delta\Delta$ 3050	
560	511	357	0,15	1,5	1,8	35 x 40	ECS2GBC391M $\diamond\diamond\Delta\Delta$ 3540	
680	424	296	0,15	1,5	2,1	35 x 45	ECS2GBC471M $\diamond\diamond\Delta\Delta$ 3545	
820	560	356	249	0,15	1,5	2,3	35 x 50	ECS2GBC561M $\diamond\diamond\Delta\Delta$ 3550
	680	293	235	0,15	1,5	2,7	35 x 55	ECS2GBC681M $\diamond\diamond\Delta\Delta$ 3555
1000	243	194	0,15	1,5	3,1	35 x 60	ECS2GBC821M $\diamond\diamond\Delta\Delta$ 3560	
	243	194	0,15	1,5	3,1	40 x 50	ECS2GBC821M $\diamond\diamond\Delta\Delta$ 4050	
1000	199	139	0,15	1,5	3,8	35 x 70	ECS2GBC102M $\diamond\diamond\Delta\Delta$ 3570	
<b>420</b> <b>(470)</b> <b>2X</b>	68	2926	1522	0,15	0,3	0,56	22 x 25	ECS2XBC680M $\diamond\diamond\Delta\Delta$ 2225
	82	2427	1262	0,15	0,3	0,62	22 x 30	ECS2XBC820M $\diamond\diamond\Delta\Delta$ 2230
	100	1990	1035	0,15	0,4	0,71	22 x 35	ECS2XBC101M $\diamond\diamond\Delta\Delta$ 2235
		1658	863	0,15	0,5	0,80	22 x 40	ECS2XBC121M $\diamond\diamond\Delta\Delta$ 2240
	120	1658	863	0,15	0,5	0,81	25 x 30	ECS2XBC121M $\diamond\diamond\Delta\Delta$ 2530
		1327	690	0,15	0,6	0,92	22 x 45	ECS2XBC151M $\diamond\diamond\Delta\Delta$ 2245
	150	1327	690	0,15	0,6	0,93	25 x 35	ECS2XBC151M $\diamond\diamond\Delta\Delta$ 2535
		1106	575	0,15	0,8	1,1	25 x 40	ECS2XBC181M $\diamond\diamond\Delta\Delta$ 2540
	180	1106	575	0,15	0,8	1,1	30 x 30	ECS2XBC181M $\diamond\diamond\Delta\Delta$ 3030
		905	471	0,15	0,9	1,2	25 x 45	ECS2XBC221M $\diamond\diamond\Delta\Delta$ 2545
	220	905	471	0,15	0,9	1,3	30 x 35	ECS2XBC221M $\diamond\diamond\Delta\Delta$ 3035
		737	383	0,15	1,1	1,3	25 x 50	ECS2XBC271M $\diamond\diamond\Delta\Delta$ 2550
	270	737	383	0,15	1,1	1,4	30 x 40	ECS2XBC271M $\diamond\diamond\Delta\Delta$ 3040
		603	314	0,15	1,4	1,6	30 x 45	ECS2XBC331M $\diamond\diamond\Delta\Delta$ 3045
	330	603	314	0,15	1,4	1,6	35 x 35	ECS2XBC331M $\diamond\diamond\Delta\Delta$ 3535
		511	265	0,15	1,5	1,9	30 x 50	ECS2XBC391M $\diamond\diamond\Delta\Delta$ 3050

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 85°C 120Hz	Size øD x L	ORDER CODE
(V)	(µF)	(mΩ)	(mΩ)	(mA)	(Arms)	(mm)	Details: Page 79	
<b>420</b> <b>(470)</b> <b>2X</b>	470	424	220	0,15	1,5	2,2	35 x 45	ECS2XBC471M $\diamond\diamond\Delta\Delta$ 3545
	560	356	185	0,15	1,5	2,4	35 x 50	ECS2XBC561M $\diamond\diamond\Delta\Delta$ 3550
	680	293	153	0,15	1,5	2,8	35 x 55	ECS2XBC681M $\diamond\diamond\Delta\Delta$ 3555
	820	243	126	0,15	1,5	3,2	35 x 60	ECS2XBC821M $\diamond\diamond\Delta\Delta$ 3560
<b>450</b> <b>(500)</b> <b>2W</b>	68	2926	2049	0,15	0,3	0,6	22 x 30	ECS2WBC680M $\diamond\diamond\Delta\Delta$ 2230
	82	2427	1699	0,15	0,4	0,6	22 x 35	ECS2WBC820M $\diamond\diamond\Delta\Delta$ 2235
		1990	1393	0,15	0,5	0,7	22 x 35	ECS2WBC101M $\diamond\diamond\Delta\Delta$ 2235
	100	1990	1393	0,15	0,5	0,7	25 x 30	ECS2WBC101M $\diamond\diamond\Delta\Delta$ 2530
		1658	1161	0,15	0,5	0,8	22 x 40	ECS2WBC121M $\diamond\diamond\Delta\Delta$ 2240
	120	1658	1161	0,15	0,5	0,8	25 x 35	ECS2WBC121M $\diamond\diamond\Delta\Delta$ 2535
		1327	929	0,15	0,7	1,0	22 x 50	ECS2WBC151M $\diamond\diamond\Delta\Delta$ 2250
	150	1327	929	0,15	0,7	1,0	25 x 40	ECS2WBC151M $\diamond\diamond\Delta\Delta$ 2540
		1327	929	0,15	0,7	1,0	30 x 30	ECS2WBC151M $\diamond\diamond\Delta\Delta$ 3030
	180	1106	774	0,15	0,8	1,1	25 x 45	ECS2WBC181M $\diamond\diamond\Delta\Delta$ 2545
		1106	774	0,15	0,8	1,1	30 x 35	ECS2WBC181M $\diamond\diamond\Delta\Delta$ 3035
	220	1106	774	0,15	0,8	1,2	35 x 25	ECS2WBC181M $\diamond\diamond\Delta\Delta$ 3525
		905	633	0,15	1,0	1,2	25 x 50	ECS2WBC221M $\diamond\diamond\Delta\Delta$ 2550
	270	905	633	0,15	1,0	1,3	30 x 40	ECS2WBC221M $\diamond\diamond\Delta\Delta$ 3040
		905	633	0,15	1,0	1,3	35 x 30	ECS2WBC221M $\diamond\diamond\Delta\Delta$ 3530
	330	737	516	0,15	1,2	1,4	30 x 45	ECS2WBC271M $\diamond\diamond\Delta\Delta$ 3045
737		516	0,15	1,2	1,5	35 x 35	ECS2WBC271M $\diamond\diamond\Delta\Delta$ 3535	
390	603	423	0,15	1,5	1,7	30 x 50	ECS2WBC331M $\diamond\diamond\Delta\Delta$ 3050	
470	511	357	0,15	1,5	1,9	35 x 45	ECS2WBC391M $\diamond\diamond\Delta\Delta$ 3545	
560	424	296	0,15	1,5	2,2	35 x 50	ECS2WBC471M $\diamond\diamond\Delta\Delta$ 3550	
680	356	285	0,15	1,5	2,4	35 x 55	ECS2WBC561M $\diamond\diamond\Delta\Delta$ 3555	
	293	235	0,15	1,5	2,8	35 x 60	ECS2WBC681M $\diamond\diamond\Delta\Delta$ 3560	
820	293	235	0,15	1,5	2,8	40 x 50	ECS2WBC681M $\diamond\diamond\Delta\Delta$ 4050	
	243	194	0,15	1,5	3,2	35 x 65	ECS2WBC821M $\diamond\diamond\Delta\Delta$ 3565	
1000	243	194	0,15	1,5	3,3	40 x 60	ECS2WBC821M $\diamond\diamond\Delta\Delta$ 4060	
	199	139	0,15	1,5	3,9	35 x 75	ECS2WBC102M $\diamond\diamond\Delta\Delta$ 3575	
<b>500</b> <b>(550)</b> <b>2H</b>	100	1990	1592	0,15	0,5	0,90	25 x 30	ECS2HBC101M $\diamond\diamond\Delta\Delta$ 2530
		1990	1592	0,15	0,5	0,88	30 x 25	ECS2HBC101M $\diamond\diamond\Delta\Delta$ 3025
	120	1658	1327	0,15	0,6	1,0	25 x 35	ECS2HBC121M $\diamond\diamond\Delta\Delta$ 2535
		1658	1327	0,15	0,6	1,0	30 x 30	ECS2HBC121M $\diamond\diamond\Delta\Delta$ 3030
	150	1658	1327	0,15	0,6	0,95	35 x 25	ECS2HBC121M $\diamond\diamond\Delta\Delta$ 3525
		1327	1062	0,15	0,8	1,2	25 x 40	ECS2HBC151M $\diamond\diamond\Delta\Delta$ 2540
	180	1327	1062	0,15	0,8	1,2	30 x 35	ECS2HBC151M $\diamond\diamond\Delta\Delta$ 3035
		1106	885	0,15	0,9	1,4	30 x 40	ECS2HBC181M $\diamond\diamond\Delta\Delta$ 3040
	220	1106	885	0,15	0,9	1,3	35 x 30	ECS2HBC181M $\diamond\diamond\Delta\Delta$ 3530
		905	724	0,15	1,1	1,6	30 x 45	ECS2HBC221M $\diamond\diamond\Delta\Delta$ 3045
	270	905	724	0,15	1,1	1,5	35 x 35	ECS2HBC221M $\diamond\diamond\Delta\Delta$ 3535
		737	590	0,15	1,4	1,8	30 x 50	ECS2HBC271M $\diamond\diamond\Delta\Delta$ 3050
	330	737	590	0,15	1,4	1,7	35 x 40	ECS2HBC271M $\diamond\diamond\Delta\Delta$ 3540
		603	483	0,15	1,5	2,0	30 x 50	ECS2HBC331M $\diamond\diamond\Delta\Delta$ 3050
	390	603	483	0,1				

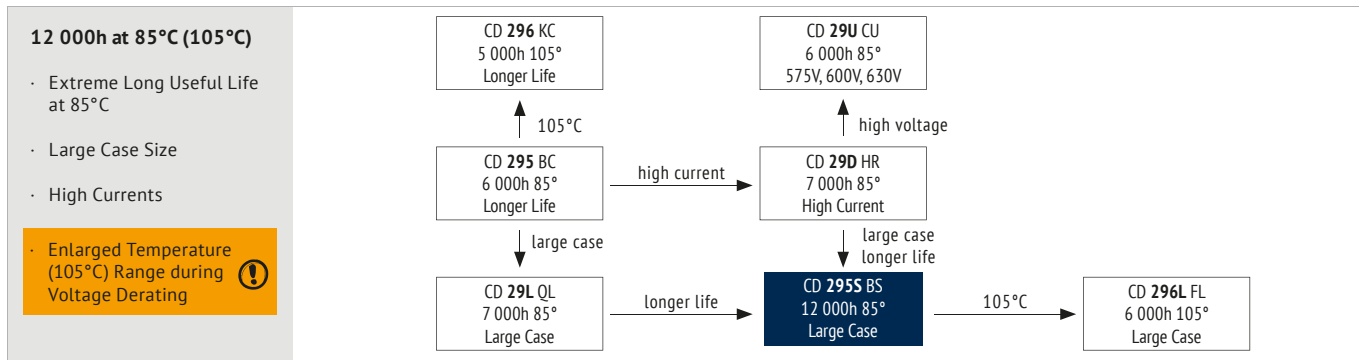

**ITEM CHARACTERISTICS**

Operating Temperature Range (°C)	-40 ~ +85	-25 ~ +85	The usage at lower temperatures than indicated may be possible. Please contact the Jianghai Europe sales office for approval. Additionally please ask for series CD 295D ZD with temperature range -55°C ~ +85°C and 10 000h useful life.
Voltage Range (V)	160 ~ 400	450 ~ 500	
Capacitance Range (µF)	390 ~ 4 700		
Capacitance Tolerance (20°C, 120Hz)	± 20%		

Leakage Current: After 5 minutes at 20°C application of rated voltage, leakage current is not more than specified in table.

Enlarged Temperature Range: The maximum temperature at hotspot of 105°C is allowed, if the maximum voltage is limited to 0,93\*U<sub>r</sub> (Voltage Derating)

Stability at Low Temperature (Impedance Ratio at 120Hz)	Rated Voltage (V)	160 ~ 200	250 ~ 400	450 ~ 500
	Z <sub>-25°C</sub> / Z <sub>+20°C</sub>		3	4
Z <sub>-40°C</sub> / Z <sub>+20°C</sub>		6	8	-

Fast Charge-Discharge: Please contact Jianghai for an appropriate choice of the capacitor or possible technical adaptations, esp. for applications like: Welding, Photoflash, Servo motors, X-Ray


ITEM	USEFUL LIFE		LOAD LIFE	ENDURANCE TEST	SHELF LIFE	
Lifetime	12 000h	> 100 000h	5 000h	7 000h	1 000h	
Leakage Current	Not more than specified value		Not more than specified value	Not more than specified value	Not more than specified value	
Capacitance Change	Within ± 30% of initial value		Within ± 20% of initial value	Within ± 20% of initial value	Within ± 20% of initial value	
Dissipation Factor	Not more than 300% of specified value		Not more than 200% of specified value	Not more than 200% of specified value	Not more than 200% of specified value	
Condition:						
Applied Voltage	U <sub>r</sub>	U <sub>r</sub>	U <sub>r</sub>	U <sub>r</sub>	U <sub>r</sub> = 0	After test: U <sub>r</sub> to be applied for 30 min > 24h before measurement
Applied Current	I <sub>r</sub>	1,2 x I <sub>r</sub>	I <sub>r</sub>	I <sub>r</sub> = 0	I <sub>r</sub> = 0	
Applied Temperature	85°C	40°C	85°C	85°C	85°C	

**MULTIPLIER FOR RIPPLE CURRENT (FREQUENCY COEFFICIENT)**

Frequency	50Hz	120Hz	300Hz	1kHz	10kHz	≥ 50 kHz
Factor	0,80	1,00	1,16	1,30	1,41	1,43

Multipliers for typical operating conditions.

**MULTIPLIER FOR LIFETIME (LIFETIME DIAGRAM)**

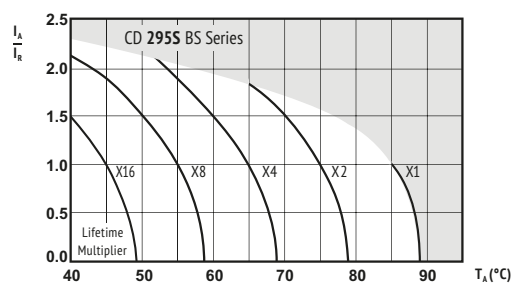

I<sub>A</sub> = actual ripple current at 120Hz, I<sub>r</sub> = rated ripple current at 120Hz, 85°C  
Multiplier of Useful Life as a function of ambient temperature & ripple current load

Max. Current Snap-In Terminal: 15A. For more current use Lug-Terminals.

**ENVIRONMENTAL**

The products are RoHS, WEEE and REACH compliant. The detailed version please see separate "Environmental Certificates" document or www.jianghai-europe.com

**SAFETY FACTOR**


This diagram includes a safety margin. In many cases the allowed current capability/lifetime may be increased. For details and approvals please contact the Jianghai Europe sales office.

SNAP-IN



U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance (μF)	ESR <sub>max</sub> Equivalent Series Resistance 20°C (mΩ)	ESR <sub>typ</sub> Equivalent Series Resistance 20°C (mΩ)	tanδ Dissipation Factor 20°C (mΩ)	I <sub>leak</sub> Leakage Current (mA)	I <sub>RAC</sub> Rated Ripple Current 85°C (Arms)	Size øD x L (mm)	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 79	
<b>160</b> <b>(200)</b> <b>2C</b>	2 200	91	63	0,15	1,5	4,9	35 x 45	ECS2CBS222M◇◇△△3545	
	2 700	74	52	0,15	1,5	5,3	35 x 50	ECS2CBS272M◇◇△△3550	
	3 300	61	42	0,15	1,5	5,5	35 x 70	ECS2CBS332M◇◇△△3570	
		61	42	0,15	1,5	5,5	40 x 60	ECS2CBS332M◇◇△△4060	
	3 900	52	36	0,15	1,5	5,9	35 x 80	ECS2CBS392M◇◇△△3580	
4 700	43	30	0,15	1,5	7,3	40 x 80	ECS2CBS472M◇◇△△4080		
<b>200</b> <b>(250)</b> <b>2D</b>	1 500	133	93	0,15	1,5	4,3	35 x 40	ECS2DBS152M◇◇△△3540	
	1 800	111	77	0,15	1,5	4,7	35 x 45	ECS2DBS182M◇◇△△3545	
		91	63	0,15	1,5	5,4	35 x 50	ECS2DBS222M◇◇△△3550	
	2 200	91	63	0,15	1,5	5,4	40 x 40	ECS2DBS222M◇◇△△4040	
		74	52	0,15	1,5	5,9	35 x 60	ECS2DBS272M◇◇△△3560	
	2 700	74	52	0,15	1,5	5,9	40 x 50	ECS2DBS272M◇◇△△4050	
		61	42	0,15	1,5	6,5	35 x 80	ECS2DBS332M◇◇△△3580	
	3 300	61	42	0,15	1,5	6,5	40 x 60	ECS2DBS332M◇◇△△4060	
		52	36	0,15	1,5	7,0	40 x 80	ECS2DBS392M◇◇△△4080	
	4 700	43	30	0,15	1,5	9,2	40 x 90	ECS2DBS472M◇◇△△4090	
	<b>250</b> <b>(300)</b> <b>2E</b>	1 000	199	139	0,15	1,5	3,7	35 x 40	ECS2EBS102M◇◇△△3540
		1 200	166	116	0,15	1,5	3,8	35 x 45	ECS2EBS122M◇◇△△3545
133			93	0,15	1,5	4,4	35 x 50	ECS2EBS152M◇◇△△3550	
1 500		133	93	0,15	1,5	4,5	40 x 40	ECS2EBS152M◇◇△△4040	
		111	77	0,15	1,5	5,0	35 x 70	ECS2EBS182M◇◇△△3570	
1 800		111	77	0,15	1,5	5,0	40 x 50	ECS2EBS182M◇◇△△4050	
		91	63	0,15	1,5	5,4	35 x 70	ECS2EBS222M◇◇△△3570	
2 700		74	52	0,15	1,5	6,9	40 x 80	ECS2EBS272M◇◇△△4080	
<b>350</b> <b>(400)</b> <b>2V</b>	680	293	205	0,15	1,5	3,6	35 x 45	ECS2VBS681M◇◇△△3545	
		293	205	0,15	1,5	3,6	40 x 40	ECS2VBS681M◇◇△△4040	
	820	243	170	0,15	1,5	4,5	35 x 60	ECS2VBS821M◇◇△△3560	
		243	170	0,15	1,5	4,5	40 x 50	ECS2VBS821M◇◇△△4050	
	1 000	199	139	0,15	1,5	5,2	35 x 70	ECS2VBS102M◇◇△△3570	
		199	139	0,15	1,5	4,9	40 x 60	ECS2VBS102M◇◇△△4060	
	1 200	166	116	0,15	1,5	5,5	35 x 80	ECS2VBS122M◇◇△△3580	
		166	116	0,15	1,5	5,6	40 x 70	ECS2VBS122M◇◇△△4070	
	1 500	133	93	0,15	1,5	6,5	40 x 80	ECS2VBS152M◇◇△△4080	
		133	93	0,15	1,5	6,2	45 x 70	ECS2VBS152M◇◇△△4570	
	1 800	111	77	0,15	1,5	7,9	40 x 100	ECS2VBS182M◇◇△△40100	
		111	77	0,15	1,5	7,1	45 x 70	ECS2VBS182M◇◇△△4570	
	2 200	91	63	0,15	1,5	8,7	40 x 100	ECS2VBS222M◇◇△△40100	
	<b>400</b> <b>(450)</b> <b>2G</b>	560	356	249	0,15	1,5	3,2	35 x 50	ECS2GBS561M◇◇△△3550
356			249	0,15	1,5	2,8	40 x 40	ECS2GBS561M◇◇△△4040	
680		293	205	0,15	1,5	3,7	35 x 60	ECS2GBS681M◇◇△△3560	
		293	205	0,15	1,5	3,8	40 x 50	ECS2GBS681M◇◇△△4050	
820		243	170	0,15	1,5	4,2	35 x 60	ECS2GBS821M◇◇△△3560	
		243	170	0,15	1,5	4,1	40 x 50	ECS2GBS821M◇◇△△4050	
1 000		199	139	0,15	1,5	4,9	35 x 70	ECS2GBS102M◇◇△△3570	
		199	139	0,15	1,5	4,8	40 x 60	ECS2GBS102M◇◇△△4060	
1 200		166	116	0,15	1,5	4,6	45 x 50	ECS2GBS102M◇◇△△4550	
		166	116	0,15	1,5	5,8	35 x 80	ECS2GBS122M◇◇△△3580	
1 500		166	116	0,15	1,5	5,5	40 x 70	ECS2GBS122M◇◇△△4070	
		133	93	0,15	1,5	6,6	40 x 80	ECS2GBS152M◇◇△△4080	
1 800		133	93	0,15	1,5	6,6	45 x 70	ECS2GBS152M◇◇△△4570	
		133	93	0,15	1,5	6,8	45 x 80	ECS2GBS152M◇◇△△4580	
1 800		111	77	0,15	1,5	7,9	40 x 90	ECS2GBS182M◇◇△△4090	
		111	77	0,15	1,5	7,3	45 x 80	ECS2GBS182M◇◇△△4580	
<b>450</b> <b>(500)</b> <b>2W</b>		470	424	296	0,15	1,5	3,0	35 x 50	ECS2WBS471M◇◇△△3550
			424	296	0,15	1,5	3,0	40 x 40	ECS2WBS471M◇◇△△4040
	560	356	249	0,15	1,5	3,1	35 x 50	ECS2WBS561M◇◇△△3550	
		356	249	0,15	1,5	3,3	35 x 60	ECS2WBS561M◇◇△△3560	
	560	356	249	0,15	1,5	3,4	40 x 50	ECS2WBS561M◇◇△△4050	
		293	205	0,15	1,5	3,5	35 x 60	ECS2WBS681M◇◇△△3560	
	680	293	205	0,15	1,5	3,8	35 x 70	ECS2WBS681M◇◇△△3570	
		293	205	0,15	1,5	3,8	40 x 60	ECS2WBS681M◇◇△△4060	
	820	243	170	0,15	1,5	4,6	35 x 80	ECS2WBS821M◇◇△△3580	
		243	170	0,15	1,5	4,4	40 x 60	ECS2WBS821M◇◇△△4060	

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance (μF)	ESR <sub>max</sub> Equivalent Series Resistance 20°C (mΩ)	ESR <sub>typ</sub> Equivalent Series Resistance 20°C (mΩ)	tanδ Dissipation Factor 20°C (mΩ)	I <sub>leak</sub> Leakage Current (mA)	I <sub>RAC</sub> Rated Ripple Current 85°C (Arms)	Size øD x L (mm)	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 79
<b>450</b> <b>(500)</b> <b>2W</b>	1 000	199	139	0,15	1,5	5,7	35 x 80	ECS2WBS102M◇◇△△3580
		199	139	0,15	1,5	5,2	40 x 60	ECS2WBS102M◇◇△△4060
	1 200	166	116	0,15	1,5	5,9	40 x 70	ECS2WBS122M◇◇△△4070
		166	116	0,15	1,5	6,2	45 x 70	ECS2WBS122M◇◇△△4570
	1 500	133	93	0,15	1,5	7,3	40 x 100	ECS2WBS152M◇◇△△40100
		133	93	0,15	1,5	7,0	45 x 80	ECS2WBS152M◇◇△△4580
1 800	111	77	0,15	1,5	7,9	45 x 100	ECS2WBS182M◇◇△△45100	
<b>500</b> <b>(550)</b> <b>2H</b>	390	511	357	0,15	1,5	1,9	35 x 50	ECS2HBS391M◇◇△△3550
		470	424	296	0,15	1,5	2,3	35 x 60
	560	356	249	0,15	1,5	2,5	35 x 60	ECS2HBS561M◇◇△△3560
		356	249	0,15	1,5	2,7	40 x 60	ECS2HBS561M◇◇△△4060
	680	293	205	0,15	1,5	3,1	35 x 80	ECS2HBS681M◇◇△△3580
		293	205	0,15	1,5	2,8	40 x 70	ECS2HBS681M◇◇△△4070
	820	243	170	0,15	1,5	3,4	35 x 90	ECS2HBS821M◇◇△△3590
		243	170	0,15	1,5	3,3	40 x 70	ECS2HBS821M◇◇△△4070
	1 000	199	139	0,15	1,5	3,9	40 x 80	ECS2HBS102M◇◇△△4080
		199	139	0,15	1,5	3,9	45 x 70	ECS2HBS102M◇◇△△4570
	1 200	166	116	0,15	1,5	4,3	40 x 90	ECS2HBS122M◇◇△△4090
	1 500	133	93	0,15	1,5	4,8	45 x 100	ECS2HBS152M◇◇△△45100

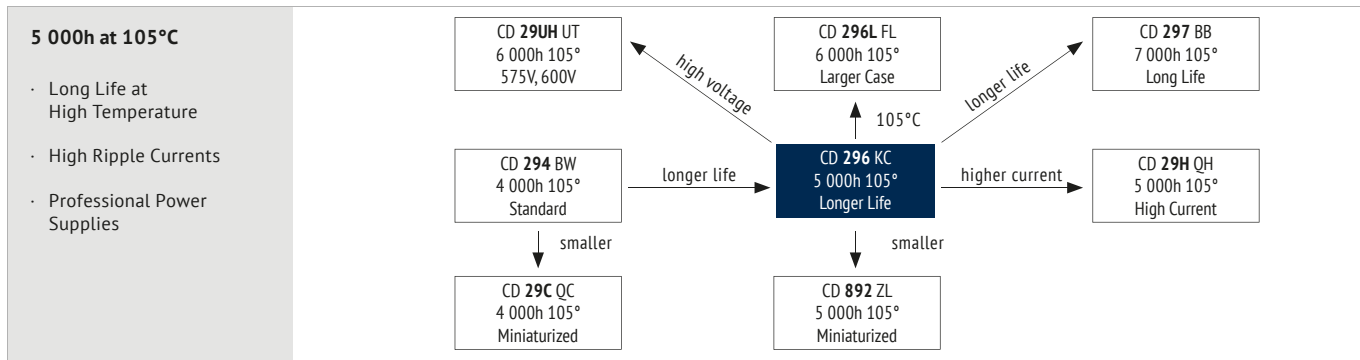

**ITEM CHARACTERISTICS**

Operating Temperature Range (°C)	-40 ~ +105	-25 ~ +105
Voltage Range (V)	16 ~ 100	160 ~ 550
Capacitance Range (µF)	47 ~ 47 000	
Capacitance Tolerance (20°C, 120Hz)	± 20%	

**!** The usage at lower temperatures than indicated may be possible. Please contact the Jianghai Europe sales office for approval.

Leakage Current: After 5 minutes at 20°C application of rated voltage, leakage current is not more than specified in table.

Stability at Low Temperature (Impedance Ratio at 120Hz)	Rated Voltage (V)	16 ~ 100	160 ~ 200	250 ~ 550
	Z <sub>-25°C</sub> / Z <sub>+20°C</sub>	4		
	Z <sub>-40°C</sub> / Z <sub>+20°C</sub>	15	-	

Fast Charge-Discharge: **!** Please contact Jianghai for an appropriate choice of the capacitor or possible technical adaptations, esp. for applications like: Welding, Photoflash, Servo motors, X-Ray


ITEM	USEFUL LIFE	LOAD LIFE	ENDURANCE TEST	SHELF LIFE	
Lifetime	5 000h > 200 000h	3 000h	4 000h	1 000h	
Leakage Current	Not more than specified value				
Capacitance Change	Within ± 20% of initial value				
Dissipation Factor	Not more than 200% of specified value				
Condition: Applied Voltage Applied Current Applied Temperature	U <sub>R</sub> I <sub>R</sub> 105°C	U <sub>R</sub> 1,4 x I <sub>R</sub> 40°C	U <sub>R</sub> I <sub>R</sub> 105°C	U <sub>R</sub> I <sub>R</sub> 105°C IEC 60384	After test: U <sub>R</sub> to be applied for 30 min > 24h before measurement

**MULTIPLIER FOR RIPPLE CURRENT (FREQUENCY COEFFICIENT)**

Frequency	50Hz	120Hz	300Hz	1kHz	10kHz	≥ 50 kHz
Rated Voltage (V)						
≤ 100	0,95	1,00	1,07	1,13	1,19	1,20
160 ~ 250	0,87	1,00	1,17	1,32	1,45	1,50
≥ 315	0,80	1,00	1,16	1,30	1,41	1,43

Multipliers for typical operating conditions.

**MULTIPLIER FOR LIFETIME (LIFETIME DIAGRAM)**

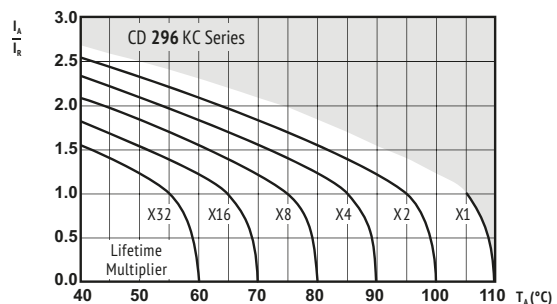

I<sub>A</sub> = actual ripple current at 120Hz,  
I<sub>R</sub> = rated ripple current at 120Hz, 105°C  
Multiplier of Useful Life as a function of ambient temperature & ripple current load

**!** Max. Current Snap-In Terminal: 15A. For more current use Lug-Terminals.

**ENVIRONMENTAL**

The products are RoHS, WEEE and REACH compliant. The detailed version please see separate "Environmental Certificates" document or www.jianghai-europe.com

**! SAFETY FACTOR**

This diagram includes a safety margin. In many cases the allowed current capability/lifetime may be increased. For details and approvals please contact the Jianghai Europe sales office.

SNAP-IN

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance (μF)	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz (mΩ)	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz (mΩ)	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current (mA)	I <sub>RAC</sub> Rated Ripple Current 105°C 120Hz (Arms)	Size øD x L (mm)	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 79
6 800	98	68	0,50	1,1	1,60	22 x 25	ECS1CKC682M◇◇△△2225	
	8 200	81	57	0,50	1,3	1,80	25 x 25	ECS1CKC822M◇◇△△2525
10 000	67	46	0,50	1,5	1,99	22 x 30	ECS1CKC103M◇◇△△2230	
	67	46	0,50	1,5	1,99	25 x 25	ECS1CKC103M◇◇△△2525	
12 000	56	39	0,50	1,5	2,28	22 x 35	ECS1CKC123M◇◇△△2235	
	56	39	0,50	1,5	2,30	25 x 30	ECS1CKC123M◇◇△△2530	
15 000	56	39	0,50	1,5	2,38	30 x 25	ECS1CKC123M◇◇△△3025	
	45	31	0,50	1,5	2,64	22 x 40	ECS1CKC153M◇◇△△2240	
18 000	45	31	0,50	1,5	2,68	25 x 35	ECS1CKC153M◇◇△△2535	
	37	26	0,50	1,5	2,98	22 x 45	ECS1CKC183M◇◇△△2245	
	37	26	0,50	1,5	3,04	25 x 40	ECS1CKC183M◇◇△△2540	
	37	26	0,50	1,5	3,00	30 x 30	ECS1CKC183M◇◇△△3030	
22 000	37	26	0,50	1,5	3,10	35 x 25	ECS1CKC183M◇◇△△3525	
	31	21	0,50	1,5	3,40	25 x 45	ECS1CKC223M◇◇△△2545	
	31	21	0,50	1,5	3,39	30 x 35	ECS1CKC223M◇◇△△3035	
27 000	25	17	0,50	1,5	3,81	25 x 50	ECS1CKC273M◇◇△△2550	
	25	17	0,50	1,5	3,83	30 x 40	ECS1CKC273M◇◇△△3040	
	25	17	0,50	1,5	3,74	35 x 30	ECS1CKC273M◇◇△△3530	
33 000	21	14	0,50	1,5	4,30	30 x 45	ECS1CKC333M◇◇△△3045	
	21	14	0,50	1,5	4,24	35 x 35	ECS1CKC333M◇◇△△3535	
39 000	18	12	0,50	1,5	4,74	30 x 50	ECS1CKC393M◇◇△△3050	
	18	12	0,50	1,5	4,72	35 x 40	ECS1CKC393M◇◇△△3540	
47 000	15	10	0,50	1,5	5,27	35 x 45	ECS1CKC473M◇◇△△3545	

4 700	113	79	0,40	1,2	1,55	22 x 25	ECS1EKC472M◇◇△△2225
	5 600	95	66	0,40	1,4	1,70	25 x 25
6 800	79	55	0,40	1,5	1,91	22 x 30	ECS1EKC682M◇◇△△2230
	79	55	0,40	1,5	1,91	25 x 25	ECS1EKC682M◇◇△△2525
8 200	65	45	0,40	1,5	2,14	22 x 35	ECS1EKC822M◇◇△△2235
	65	45	0,40	1,5	2,16	25 x 30	ECS1EKC822M◇◇△△2530
	65	45	0,40	1,5	2,25	30 x 25	ECS1EKC822M◇◇△△3025
10 000	54	37	0,40	1,5	2,40	22 x 40	ECS1EKC103M◇◇△△2240
	54	37	0,40	1,5	2,44	25 x 35	ECS1EKC103M◇◇△△2535
	45	31	0,40	1,5	2,69	22 x 45	ECS1EKC123M◇◇△△2245
12 000	45	31	0,40	1,5	2,74	25 x 40	ECS1EKC123M◇◇△△2540
	45	31	0,40	1,5	2,70	30 x 30	ECS1EKC123M◇◇△△3030
	45	31	0,40	1,5	2,80	35 x 25	ECS1EKC123M◇◇△△3525
15 000	36	25	0,40	1,5	3,15	25 x 45	ECS1EKC153M◇◇△△2545
	36	25	0,40	1,5	3,13	30 x 35	ECS1EKC153M◇◇△△3035
	36	25	0,40	1,5	3,22	35 x 30	ECS1EKC153M◇◇△△3530
18 000	30	21	0,40	1,5	3,54	25 x 50	ECS1EKC183M◇◇△△2550
	30	21	0,40	1,5	3,54	30 x 40	ECS1EKC183M◇◇△△3040
22 000	25	17	0,40	1,5	4,24	30 x 45	ECS1EKC223M◇◇△△3045
	25	17	0,40	1,5	3,96	35 x 35	ECS1EKC223M◇◇△△3535
27 000	20	14	0,40	1,5	4,75	35 x 45	ECS1EKC273M◇◇△△3545
33 000	17	11	0,40	1,5	5,39	35 x 50	ECS1EKC333M◇◇△△3550

3 300	141	99	0,35	1,2	1,43	22 x 25	ECS1VKC332M◇◇△△2225
	3 900	120	83	0,35	1,4	1,65	22 x 30
4 700	99	69	0,35	1,5	1,78	25 x 25	ECS1VKC472M◇◇△△2525
	83	58	0,35	1,5	2,02	22 x 35	ECS1VKC562M◇◇△△2235
5 600	83	58	0,35	1,5	2,04	25 x 30	ECS1VKC562M◇◇△△2530
	83	58	0,35	1,5	2,12	30 x 25	ECS1VKC562M◇◇△△3025
	69	48	0,35	1,5	2,28	22 x 40	ECS1VKC682M◇◇△△2240
6 800	69	48	0,35	1,5	2,31	25 x 35	ECS1VKC682M◇◇△△2535
	57	40	0,35	1,5	2,67	22 x 50	ECS1VKC822M◇◇△△2250
8 200	57	40	0,35	1,5	2,60	25 x 40	ECS1VKC822M◇◇△△2540
	57	40	0,35	1,5	2,56	30 x 30	ECS1VKC822M◇◇△△3030
	57	40	0,35	1,5	2,78	35 x 25	ECS1VKC822M◇◇△△3525
10 000	47	33	0,35	1,5	2,92	25 x 45	ECS1VKC103M◇◇△△2545
	47	33	0,35	1,5	2,92	30 x 35	ECS1VKC103M◇◇△△3035
	39	27	0,35	1,5	3,26	25 x 50	ECS1VKC123M◇◇△△2550
12 000	39	27	0,35	1,5	3,28	30 x 40	ECS1VKC123M◇◇△△3040
	39	27	0,35	1,5	3,20	35 x 30	ECS1VKC123M◇◇△△3530
15 000	31	22	0,35	1,5	3,74	30 x 45	ECS1VKC153M◇◇△△3045
	31	22	0,35	1,5	3,69	35 x 35	ECS1VKC153M◇◇△△3535
18 000	26	18	0,35	1,5	4,16	35 x 40	ECS1VKC183M◇◇△△3540
22 000	22	15	0,35	1,5	4,92	35 x 50	ECS1VKC223M◇◇△△3550

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance (μF)	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz (mΩ)	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz (mΩ)	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current (mA)	I <sub>RAC</sub> Rated Ripple Current 105°C 120Hz (Arms)	Size øD x L (mm)	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 79
1 800	222	155	0,30	0,9	1,31	22 x 25	ECS1HKC182M◇◇△△2225	
	2 200	181	127	0,30	1,1	1,45	22 x 30	ECS1HKC222M◇◇△△2230
2 700	148	103	0,30	1,4	1,70	22 x 30	ECS1HKC272M◇◇△△2230	
	148	103	0,30	1,4	1,70	25 x 25	ECS1HKC272M◇◇△△2525	
3 300	121	84	0,30	1,5	1,98	22 x 35	ECS1HKC332M◇◇△△2235	
	121	84	0,30	1,5	2,00	25 x 30	ECS1HKC332M◇◇△△2530	
3 900	103	72	0,30	1,5	2,25	22 x 40	ECS1HKC392M◇◇△△2240	
	103	72	0,30	1,5	2,28	25 x 35	ECS1HKC392M◇◇△△2535	
	103	72	0,30	1,5	2,22	30 x 25	ECS1HKC392M◇◇△△3025	
4 700	85	59	0,30	1,5	2,56	22 x 45	ECS1HKC472M◇◇△△2245	
	85	59	0,30	1,5	2,58	30 x 30	ECS1HKC472M◇◇△△3030	
	85	59	0,30	1,5	2,67	35 x 25	ECS1HKC472M◇◇△△3525	
5 600	72	50	0,30	1,5	2,89	22 x 50	ECS1HKC562M◇◇△△2250	
	72	50	0,30	1,5	2,81	25 x 40	ECS1HKC562M◇◇△△2540	
6 800	72	50	0,30	1,5	2,95	30 x 35	ECS1HKC562M◇◇△△3035	
	59	41	0,30	1,5	3,37	25 x 50	ECS1HKC682M◇◇△△2550	
	59	41	0,30	1,5	3,39	30 x 40	ECS1HKC682M◇◇△△3040	
8 200	59	41	0,30	1,5	3,31	35 x 30	ECS1HKC682M◇◇△△3530	
	49	34	0,30	1,5	3,71	30 x 45	ECS1HKC822M◇◇△△3045	
10 000	49	34	0,30	1,5	3,66	35 x 35	ECS1HKC822M◇◇△△3535	
	40	28	0,30	1,5	4,09	30 x 50	ECS1HKC103M◇◇△△3050	
12 000	40	28	0,30	1,5	4,07	35 x 40	ECS1HKC103M◇◇△△3540	
	34	23	0,30	1,5	4,50	35 x 45	ECS1HKC123M◇◇△△3545	

1 200	222	155	0,20	0,8	1,39	22 x 25	ECS1JKC122M◇◇△△2225
	1 500	177	124	0,20	0,9	1,52	22 x 30
1 800	148	103	0,20	1,1	1,52	22 x 30	ECS1JKC182M◇◇△△2230
	148	103	0,20	1,1	1,52	25 x 25	ECS1JKC182M◇◇△△2525
2 200	121	84	0,20	1,4	1,73	22 x 35	ECS1JKC222M◇◇△△2235
	121	84	0,20	1,4	1,75	25 x 30	ECS1JKC222M◇◇△△2530
	99	69	0,20	1,5	1,97	22 x 40	ECS1JKC272M◇◇△△2240
2 700	99	69	0,20	1,5	1,99	25 x 35	ECS1JKC272M◇◇△△2535
	99	69	0,20	1,5	1,93	30 x 25	ECS1JKC272M◇◇△△3025
3 300	81	56	0,20	1,5	2,32	22 x 50	ECS1JKC332M◇◇△△2250
	81	56	0,20	1,5	2,27	25 x 40	ECS1JKC332M◇◇△△2540
	81	56	0,20	1,5	2,24	30 x 30	ECS1JKC332M◇◇△△3030
3 900	81	56	0,20	1,5	2,41	35 x 25	ECS1JKC332M◇◇△△3525
	69	48	0,20	1,5	2,54	25 x 45	ECS1JKC392M◇◇△△2545
	69	48	0,20	1,5	2,55	30 x 35	ECS1JKC392M◇◇△△3035
4 700	57	40	0,20	1,5	2,88	25 x 50	ECS1JKC472M◇◇△△2550
	57	40	0,20	1,5	2,90	30 x 40	ECS1JKC472M◇◇△△3040
5 600	57	40	0,20	1,5	2,83	35 x 30	ECS1JKC472M◇◇△△3530
	48	33	0,20	1,5	3,28	30 x 45	ECS1JKC562M◇◇△△3045
6 800	48	33	0,20	1,5	3,24	35 x 35	ECS1JKC562M◇◇△△3535
	40	27	0,20	1,5	3,73	30 x 50	ECS1JKC682M◇◇△△3050
8 200	40	27	0,20	1,5	3,71	35 x 40	ECS1JKC682M◇◇△△3540
	33	23	0,20	1,5	4,16	35 x 45	ECS1JKC822M◇◇△△3545
10 000	27	19	0,20	1,5	4,69	35 x 50	ECS1JKC103M◇◇△△3550

820	324	227	0,20	0,7	1,11	22 x 25	ECS1KKC821M◇◇△△2225
	1 000	266	186	0,20	0,8	1,25	22 x 25
1 200	222	155	0,20	1,0	1,39	22 x 30	ECS1KKC122M◇◇△△2230
	222	155	0,20	1,0	1,39	25 x 25	ECS1KKC122M◇◇△△2525
1 500	177	124	0,20	1,2	1,61	22 x 35	ECS1KKC152M◇◇△△2235
	177	124	0,20	1,2	1,62	25 x 30	ECS1KKC152M◇◇△△2530
1 800	148	103	0,20	1,4	1,83	22 x 40	ECS1KKC182M◇◇△△2240
	148	103	0,20	1,4	1,81	30 x 25	ECS1KKC182M◇◇△△3025
	121	84	0,20	1,5	2,09	22 x 45	ECS1KKC222M◇◇△△2245
2 200	121	84	0,20	1,5	2,01	25 x 35	ECS1KKC222M◇◇△△2535
	121	84	0,20	1,5	2,10	30 x 30	ECS1KKC222M◇◇△△3030
	121	84	0,20	1,5	2,17	35 x 25	ECS1KKC222M◇◇△△3525
2 700	99	69	0,20	1,5	2,43	25 x 45	ECS1KKC272M◇◇△△2545
	99	69	0,20	1,5	2,43	30 x 35	ECS1KKC272M◇◇△△3035
3 300	81	56	0,20	1,5	2,76	25 x 50	ECS1KKC332M◇◇△△2550
	81	56	0,20	1,5	2,78	30 x 40	ECS1KKC332M◇◇△△3040
3 900	81	56	0,20	1,5	2,71	35 x 30	ECS1KKC332M◇◇△△3530
	69	48	0,20	1,5	3,12	30 x 45	ECS1KKC392M◇◇△△3045
69	48	0,20	1,5	3,07	35 x 35	ECS1KKC392M◇◇△△3535	

>>

SNAP-IN



U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 105°C 120Hz	Size øD x L	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 79
(V)	(µF)	(mΩ)	(mΩ)		(mA)	(Arms)	(mm)	

4 700	57	57	40	0,20	1,5	3,56	30 x 50	ECS1KKC472M◇◇△△3050
		57	40	0,20	1,5	3,50	35 x 40	ECS1KKC472M◇◇△△3540
5 600	48	33	0,20	1,5	3,87		35 x 45	ECS1KKC562M◇◇△△3545
6 800	40	27	0,20	1,5	4,19		35 x 50	ECS1KKC682M◇◇△△3550

560	474	332	0,20	0,6	1,07		22 x 25	ECS2AKC561M◇◇△△2225
		391	274	0,20	0,7	1,20	22 x 30	ECS2AKC681M◇◇△△2230
680	324	227	0,20	0,8	1,35		22 x 30	ECS2AKC821M◇◇△△2230
		324	227	0,20	0,8	1,35	25 x 25	ECS2AKC821M◇◇△△2525
820	266	186	0,20	1,0	1,54		22 x 35	ECS2AKC102M◇◇△△2235
		266	186	0,20	1,0	1,56	25 x 30	ECS2AKC102M◇◇△△2530
1 000	222	155	0,20	1,2	1,74		22 x 40	ECS2AKC122M◇◇△△2240
		222	155	0,20	1,2	1,76	25 x 35	ECS2AKC122M◇◇△△2535
		222	155	0,20	1,2	1,71	30 x 25	ECS2AKC122M◇◇△△3025
1 200	177	124	0,20	1,5	1,99		22 x 45	ECS2AKC152M◇◇△△2245
		177	124	0,20	1,5	2,03	25 x 40	ECS2AKC152M◇◇△△2540
1 500	177	124	0,20	1,5	2,00		30 x 30	ECS2AKC152M◇◇△△3030
		177	124	0,20	1,5	2,07	35 x 25	ECS2AKC152M◇◇△△3525
		148	103	0,20	1,5	2,28	25 x 45	ECS2AKC182M◇◇△△2545
1 800	148	103	0,20	1,5	2,27		30 x 35	ECS2AKC182M◇◇△△3035
		121	84	0,20	1,5	2,57	25 x 50	ECS2AKC222M◇◇△△2550
2 200	121	84	0,20	1,5	2,59		30 x 40	ECS2AKC222M◇◇△△3040
		121	84	0,20	1,5	2,52	35 x 30	ECS2AKC222M◇◇△△3530
2 700	99	69	0,20	1,5	2,94		30 x 45	ECS2AKC272M◇◇△△3045
		99	69	0,20	1,5	2,90	35 x 35	ECS2AKC272M◇◇△△3535
3 300	81	56	0,20	1,5	3,32		30 x 50	ECS2AKC332M◇◇△△3050
		81	56	0,20	1,5	3,31	35 x 40	ECS2AKC332M◇◇△△3540
3 900	69	48	0,20	1,5	3,69		35 x 45	ECS2AKC392M◇◇△△3545
4 700	57	40	0,20	1,5	4,14		35 x 50	ECS2AKC472M◇◇△△3550

330	603	422	0,15	0,5	1,16		22 x 25	ECS2CKC331M◇◇△△2225
		390	511	0,15	0,6	1,43	22 x 30	ECS2CKC391M◇◇△△2230
470	424	296	0,15	0,8	1,52		22 x 35	ECS2CKC471M◇◇△△2235
		424	296	0,15	0,8	1,55	25 x 25	ECS2CKC471M◇◇△△2525
560	356	249	0,15	0,9	1,62		22 x 40	ECS2CKC561M◇◇△△2240
		356	249	0,15	0,9	1,73	25 x 30	ECS2CKC561M◇◇△△2530
680	293	205	0,15	1,1	1,70		22 x 45	ECS2CKC681M◇◇△△2245
		293	205	0,15	1,1	1,81	25 x 35	ECS2CKC681M◇◇△△2535
		293	205	0,15	1,1	1,82	30 x 25	ECS2CKC681M◇◇△△3025
820	243	170	0,15	1,3	1,91		22 x 50	ECS2CKC821M◇◇△△2250
		243	170	0,15	1,3	1,98	25 x 40	ECS2CKC821M◇◇△△2540
		243	170	0,15	1,3	1,98	30 x 30	ECS2CKC821M◇◇△△3030
		243	170	0,15	1,3	1,93	35 x 25	ECS2CKC821M◇◇△△3525
1 000	199	139	0,15	1,5	2,04		25 x 45	ECS2CKC102M◇◇△△2545
		199	139	0,15	1,5	2,14	30 x 35	ECS2CKC102M◇◇△△3035
1 200	166	116	0,15	1,5	2,12		25 x 50	ECS2CKC122M◇◇△△2550
		166	116	0,15	1,5	2,22	30 x 40	ECS2CKC122M◇◇△△3040
1 500	166	116	0,15	1,5	2,40		35 x 30	ECS2CKC122M◇◇△△3530
		133	93	0,15	1,5	2,46	30 x 45	ECS2CKC152M◇◇△△3045
1 800	133	93	0,15	1,5	2,53		35 x 35	ECS2CKC152M◇◇△△3535
		111	77	0,15	1,5	2,98	35 x 45	ECS2CKC182M◇◇△△3545
2 200	91	66	0,15	1,5	3,10		35 x 50	ECS2CKC222M◇◇△△3550
2 700	74	51	0,15	1,5	3,92		35 x 60	ECS2CKC272M◇◇△△3560
3 300	61	42	0,15	1,5	4,63		35 x 70	ECS2CKC332M◇◇△△3570

220	905	633	0,15	0,4	1,08		22 x 25	ECS2DKC221M◇◇△△2225
		603	422	0,15	0,7	1,30	22 x 30	ECS2DKC331M◇◇△△2230
330	603	422	0,15	0,7	1,35		25 x 25	ECS2DKC331M◇◇△△2525
		390	511	0,15	0,8	1,41	22 x 35	ECS2DKC391M◇◇△△2235
470	424	296	0,15	0,9	1,50		22 x 40	ECS2DKC471M◇◇△△2240
		424	296	0,15	0,9	1,47	25 x 30	ECS2DKC471M◇◇△△2530
560	424	296	0,15	0,9	1,56		30 x 25	ECS2DKC471M◇◇△△3025
		356	249	0,15	1,1	1,58	22 x 45	ECS2DKC561M◇◇△△2245
680	356	249	0,15	1,1	1,60		25 x 35	ECS2DKC561M◇◇△△2535
		293	205	0,15	1,4	1,78	22 x 50	ECS2DKC681M◇◇△△2250
		293	205	0,15	1,4	1,80	25 x 40	ECS2DKC681M◇◇△△2540
		293	205	0,15	1,4	1,82	30 x 30	ECS2DKC681M◇◇△△3030
		293	205	0,15	1,4	1,86	35 x 25	ECS2DKC681M◇◇△△3525

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 105°C 120Hz	Size øD x L	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 79
(V)	(µF)	(mΩ)	(mΩ)		(mA)	(Arms)	(mm)	

820	243	170	0,15	1,5	1,97		25 x 50	ECS2DKC821M◇◇△△2550
		243	170	0,15	1,5	1,99	30 x 35	ECS2DKC821M◇◇△△3035
		243	170	0,15	1,5	2,07	35 x 30	ECS2DKC821M◇◇△△3530
1 000	199	139	0,15	1,5	2,17		30 x 45	ECS2DKC102M◇◇△△3045
		199	139	0,15	1,5	2,22	35 x 35	ECS2DKC102M◇◇△△3535
1 200	166	116	0,15	1,5	2,32		30 x 50	ECS2DKC122M◇◇△△3050
		166	116	0,15	1,5	2,42	35 x 40	ECS2DKC122M◇◇△△3540
1 500	133	93	0,15	1,5	2,59		35 x 45	ECS2DKC152M◇◇△△3545
1 800	111	77	0,15	1,5	2,70		35 x 50	ECS2DKC182M◇◇△△3550
2 200	91	63	0,15	1,5	3,23		35 x 60	ECS2DKC222M◇◇△△3560

180	1106	774	0,15	0,5	0,94		22 x 25	ECS2EKC181M◇◇△△2225
		905	633	0,15	0,6	1,10	22 x 30	ECS2EKC221M◇◇△△2230
220	905	633	0,15	0,6	1,15		25 x 25	ECS2EKC221M◇◇△△2525
		270	737	0,15	0,7	1,13	22 x 35	ECS2EKC271M◇◇△△2235
330	603	422	0,15	0,8	1,20		22 x 40	ECS2EKC331M◇◇△△2240
		603	422	0,15	0,8	1,30	25 x 30	ECS2EKC331M◇◇△△2530
		603	422	0,15	0,8	1,30	30 x 25	ECS2EKC331M◇◇△△3025
390	511	357	0,15	1,0	1,41		22 x 45	ECS2EKC391M◇◇△△2245
		511	357	0,15	1,0	1,42	25 x 35	ECS2EKC391M◇◇△△2535
470	424	296	0,15	1,2	1,48		22 x 50	ECS2EKC471M◇◇△△2250
		424	296	0,15	1,2	1,47	25 x 40	ECS2EKC471M◇◇△△2540
		424	296	0,15	1,2	1,51	30 x 30	ECS2EKC471M◇◇△△3030
560	424	296	0,15	1,2	1,50		35 x 25	ECS2EKC471M◇◇△△3525
		356	249	0,15	1,4	1,59	25 x 45	ECS2EKC561M◇◇△△2545
		356	249	0,15	1,4	1,57	30 x 35	ECS2EKC561M◇◇△△3035
680	356	249	0,15	1,4	1,56		35 x 30	ECS2EKC561M◇◇△△3530
		293	205	0,15	1,5	1,66	25 x 50	ECS2EKC681M◇◇△△2550
		293	205	0,15	1,5	1,68	30 x 40	ECS2EKC681M◇◇△△3040
820	243	170	0,15	1,5	1,83		30 x 45	ECS2EKC821M◇◇△△3045
		243	170	0,15	1,5	1,82	35 x 35	ECS2EKC821M◇◇△△3535
1 000	199	139	0,15	1,5	1,87		30 x 50	ECS2EKC102M◇◇△△3050
		199	139	0,15	1,5	1,99	35 x 40	ECS2EKC102M◇◇△△3540
1 200	166	116	0,15	1,5	2,10		35 x 45	ECS2EKC122M◇◇△△3545
1 500	133	93	0,15	1,5	2,70		35 x 50	ECS2EKC152M◇◇△△3550
1 800	111	77	0,15	1,5	2,92		35 x 60	ECS2EKC182M◇◇△△3560

100	1190	1095	0,15	0,3	0,61		22 x 25	ECS2FKC101M◇◇△△2225
		120	1659	0,15	0,4	0,68	22 x 30	ECS2FKC121M◇◇△△2230
150	1327	730	0,15	0,5	0,76		22 x 35	ECS2FKC151M◇◇△△2235
		1327	730	0,15	0,5	0,78	25 x 25	ECS2FKC151M◇◇△△2525
180	1106	608	0,15	0,6	0,78		22 x 40	ECS2FKC181M◇◇△△2240
		1106	608	0,15	0,6	0,85	25 x 30	ECS2FKC181M◇◇△△2530
220	905	498	0,15	0,7	0,91		22 x 45	ECS2FKC221M◇◇△△2245
		905	498	0,15	0,7	0,94	25 x 35	ECS2FKC221M◇◇△△2535
		905	498	0,15	0,7	0,95	30 x 30	ECS2FKC221M◇◇△△3030
270	737	406	0,15	0,9	0,98		22 x 50	ECS2FKC271M◇◇△△2250
		737	406	0,15	0,9	1,00	25 x 40	ECS2FKC271M◇◇△△2540
		737	406	0,15	0,9	0,98	30 x 35	ECS2FKC271M◇◇△△3035
330	603	332	0,15	1,0	1,13		25 x 45	ECS2FKC331M◇◇△△2545
		603	332	0,15	1,0	1,13	30 x 40	ECS2FKC331M◇◇△△3040
390	510	281	0,15	1,2	1,20		30 x 45	ECS2FKC391M◇◇△△3045
		510	281	0,15	1,2	1,20	35 x 30</	

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance (μF)	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz (mΩ)	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz (mΩ)	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current (mA)	I <sub>RAC</sub> Rated Ripple Current 105°C 120Hz (Arms)	Size øD x L (mm)	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 79
---	---	---	---	---	--	--	------------------------	--

180	180	1106	608	0,15	0,6	0,89	25 x 35	ECS2VKC181M◇◇△△2535
		1106	608	0,15	0,6	0,90	30 x 30	ECS2VKC181M◇◇△△3030
220	220	905	498	0,15	0,8	0,93	22 x 50	ECS2VKC221M◇◇△△2250
		905	498	0,15	0,8	0,97	25 x 40	ECS2VKC221M◇◇△△2540
270	270	905	498	0,15	0,8	0,98	35 x 25	ECS2VKC221M◇◇△△3525
		737	406	0,15	0,9	1,01	25 x 50	ECS2VKC271M◇◇△△2550
330	330	737	406	0,15	0,9	1,05	30 x 35	ECS2VKC271M◇◇△△3035
		737	406	0,15	0,9	1,01	35 x 30	ECS2VKC271M◇◇△△3530
390	390	603	332	0,15	1,2	1,16	30 x 45	ECS2VKC331M◇◇△△3045
		603	332	0,15	1,2	1,16	35 x 35	ECS2VKC331M◇◇△△3535
470	470	511	281	0,15	1,4	1,26	30 x 50	ECS2VKC391M◇◇△△3050
		511	281	0,15	1,4	1,26	35 x 40	ECS2VKC391M◇◇△△3540
560	560	424	233	0,15	1,5	1,35	35 x 45	ECS2VKC471M◇◇△△3545
		560	196	0,15	1,5	1,51	35 x 50	ECS2VKC561M◇◇△△3550
680	680	293	161	0,15	1,5	1,92	35 x 55	ECS2VKC681M◇◇△△3555
		820	133	0,15	1,5	2,25	35 x 60	ECS2VKC821M◇◇△△3560
1000	1000	199	139	0,15	1,5	2,50	35 x 60	ECS2VKC102M◇◇△△3560


68	68	2926	1522	0,15	0,3	0,47	22 x 25	ECS2GKC680M◇◇△△2225
		82	2427	1262	0,15	0,3	0,56	22 x 30
82	82	2427	1262	0,15	0,3	0,56	25 x 25	ECS2GKC820M◇◇△△2525
		100	1990	1035	0,15	0,4	0,62	22 x 30
120	120	1658	863	0,15	0,5	0,66	22 x 35	ECS2GKC121M◇◇△△2235
		1658	863	0,15	0,5	0,68	25 x 30	ECS2GKC121M◇◇△△2530
150	150	1658	863	0,15	0,5	0,70	30 x 25	ECS2GKC121M◇◇△△3025
		1327	690	0,15	0,6	0,73	22 x 40	ECS2GKC151M◇◇△△2240
180	180	1327	690	0,15	0,6	0,73	25 x 35	ECS2GKC151M◇◇△△2535
		1106	575	0,15	0,7	0,78	22 x 45	ECS2GKC181M◇◇△△2245
220	220	1106	575	0,15	0,7	0,82	25 x 40	ECS2GKC181M◇◇△△2540
		1106	575	0,15	0,7	0,83	30 x 30	ECS2GKC181M◇◇△△3030
270	270	905	471	0,15	0,9	0,87	25 x 45	ECS2GKC221M◇◇△△2545
		905	471	0,15	0,9	0,88	30 x 35	ECS2GKC221M◇◇△△3035
330	330	737	383	0,15	1,1	0,94	25 x 50	ECS2GKC271M◇◇△△2550
		737	383	0,15	1,1	0,95	30 x 40	ECS2GKC271M◇◇△△3040
390	390	737	383	0,15	1,1	0,91	35 x 30	ECS2GKC271M◇◇△△3530
		603	314	0,15	1,3	1,11	30 x 45	ECS2GKC331M◇◇△△3045
470	470	603	314	0,15	1,3	1,13	35 x 35	ECS2GKC331M◇◇△△3535
		511	265	0,15	1,5	1,15	30 x 50	ECS2GKC391M◇◇△△3050
560	560	511	265	0,15	1,5	1,26	35 x 40	ECS2GKC391M◇◇△△3540
		424	220	0,15	1,5	1,31	35 x 45	ECS2GKC471M◇◇△△3545
680	680	356	185	0,15	1,5	1,50	35 x 50	ECS2GKC561M◇◇△△3550
		293	153	0,15	1,5	1,90	35 x 55	ECS2GKC681M◇◇△△3555
820	820	243	126	0,15	1,5	2,20	35 x 60	ECS2GKC821M◇◇△△3560
		243	126	0,15	1,5	2,20	40 x 50	ECS2GKC821M◇◇△△4050
1000	1000	199	139	0,15	1,5	2,60	35 x 75	ECS2GKC102M◇◇△△3575
		199	139	0,15	1,5	2,60	40 x 60	ECS2GKC102M◇◇△△4060

68	68	3901	1951	0,20	0,3	0,50	22 x 25	ECS2XKC680M◇◇△△2225
		82	3235	1618	0,20	0,3	0,60	22 x 30
100	100	2653	1327	0,20	0,4	0,65	22 x 35	ECS2XKC101M◇◇△△2235
		2211	1106	0,20	0,5	0,70	22 x 40	ECS2XKC121M◇◇△△2240
120	120	2211	1106	0,20	0,5	0,72	25 x 30	ECS2XKC121M◇◇△△2530
		1769	885	0,20	0,6	0,75	22 x 45	ECS2XKC151M◇◇△△2245
150	150	1769	885	0,20	0,6	0,80	25 x 35	ECS2XKC151M◇◇△△2535
		1474	737	0,20	0,8	0,85	25 x 40	ECS2XKC181M◇◇△△2540
180	180	1474	737	0,20	0,8	0,85	30 x 30	ECS2XKC181M◇◇△△3030
		1206	603	0,20	0,9	0,90	25 x 45	ECS2XKC221M◇◇△△2545
220	220	1206	603	0,20	0,9	0,96	30 x 35	ECS2XKC221M◇◇△△3035
		983	492	0,20	1,1	1,05	25 x 50	ECS2XKC271M◇◇△△2550
270	270	983	492	0,20	1,1	1,06	30 x 40	ECS2XKC271M◇◇△△3040
		804	402	0,20	1,4	1,14	30 x 45	ECS2XKC331M◇◇△△3045
330	330	804	402	0,20	1,4	1,20	35 x 35	ECS2XKC331M◇◇△△3535
		681	340	0,20	1,5	1,25	30 x 50	ECS2XKC391M◇◇△△3050
390	390	681	340	0,20	1,5	1,26	35 x 40	ECS2XKC391M◇◇△△3540
		470	282	0,20	1,5	1,31	35 x 45	ECS2XKC471M◇◇△△3545
470	470	560	185	0,20	1,5	1,50	35 x 50	ECS2XKC561M◇◇△△3550
		680	153	0,20	1,5	1,90	35 x 55	ECS2XKC681M◇◇△△3555
820	820	324	162	0,20	1,5	2,20	35 x 60	ECS2XKC821M◇◇△△3560

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance (μF)	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz (mΩ)	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz (mΩ)	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current (mA)	I <sub>RAC</sub> Rated Ripple Current 105°C 120Hz (Arms)	Size øD x L (mm)	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 79
---	---	---	---	---	--	--	------------------------	--

56	56	4737	2370	0,20	0,3	0,47	22 x 25	ECS2WKC560M◇◇△△2225
		68	3901	1951	0,20	0,3	0,56	22 x 30
82	82	3901	1951	0,20	0,3	0,56	25 x 25	ECS2WKC680M◇◇△△2525
		3235	1618	0,20	0,4	0,64	22 x 35	ECS2WKC820M◇◇△△2235
100	100	2653	1327	0,20	0,5	0,70	22 x 40	ECS2WKC101M◇◇△△2240
		2653	1327	0,20	0,5	0,70	25 x 30	ECS2WKC101M◇◇△△2530
120	120	2211	1106	0,20	0,5	0,73	22 x 45	ECS2WKC121M◇◇△△2245
		2211	1106	0,20	0,5	0,73	25 x 35	ECS2WKC121M◇◇△△2535
150	150	1769	885	0,20	0,7	0,80	22 x 50	ECS2WKC151M◇◇△△2250
		1769	885	0,20	0,7	0,82	25 x 40	ECS2WKC151M◇◇△△2540
180	180	1769	885	0,20	0,7	0,83	30 x 30	ECS2WKC151M◇◇△△3030
		1474	737	0,20	0,8	0,87	25 x 45	ECS2WKC181M◇◇△△2545
220	220	1474	737	0,20	0,8	0,86	30 x 35	ECS2WKC181M◇◇△△3035
		1206	603	0,20	1,0	0,94	25 x 50	ECS2WKC221M◇◇△△2550
270	270	1206	603	0,20	1,0	0,95	30 x 40	ECS2WKC221M◇◇△△3040
		1206	603	0,20	1,0	0,91	35 x 30	ECS2WKC221M◇◇△△3530
330	330	983	492	0,20	1,2	1,11	30 x 45	ECS2WKC271M◇◇△△3045
		983	492	0,20	1,2	1,13	35 x 35	ECS2WKC271M◇◇△△3535
390	390	804	402	0,20	1,5	1,15	30 x 50	ECS2WKC331M◇◇△△3050
		804	402	0,20	1,5	1,16	35 x 40	ECS2WKC331M◇◇△△3540
470	470	681	340	0,20	1,5	1,31	35 x 45	ECS2WKC391M◇◇△△3545
		560	282	0,20	1,5	1,50	35 x 50	ECS2WKC471M◇◇△△3550
560	560	474	237	0,20	1,5	1,70	35 x 55	ECS2WKC561M◇◇△△3555
		391	196	0,20	1,5	2,00	35 x 60	ECS2WKC681M◇◇△△3560
680	680	391	196	0,20	1,5	2,00	40 x 50	ECS2WKC681M◇◇△△4050
		324	162	0,20	1,5	2,20	35 x 65	ECS2WKC821M◇◇△△3565
820	820	324	162	0,20	1,5	2,30	40 x 60	ECS2WKC821M◇◇△△4060
		1000	265	139	0,20	1,5	2,60	35 x 75

47	47	5644	2823	0,20	0,2	0,41	22 x 30	ECS2HKC470M◇◇△△2230
		56	4737	2370	0,20	0,3	0,47	22 x 30
68	68	3901	1951	0,20	0,3	0,54	22 x 35	ECS2HKC680M◇◇△△2235
		82	3235	1618	0,20	0,4	0,62	22 x 40
100	100	3235	1618	0,20	0,4	0,62	25 x 30	ECS2HKC820M◇◇△△2530
		2653	1327	0,20	0,5	0,67	22 x 45	ECS2HKC101M◇◇△△2245
120	120	2653	1327	0,20	0,5	0,67	25 x 35	ECS2HKC101M◇◇△△2535
		2211	1106	0,20	0,6	0,77	22 x 50	ECS2HKC121M◇◇△△2250
150	150	2211	1106	0,20	0,6	0,77	25 x 40	ECS2HKC121M◇◇△△2540
		2211	1106	0,20	0,6	0,77	30 x 30	ECS2HKC121M◇◇△△3030
180	180	1769	885	0,20	0,8	0,82	25 x 45	ECS2HKC151M◇◇△△2545
		1769	885	0,20	0,8	0,85	30 x 40	ECS2HKC151M◇◇△△3040
220	220	1769	885	0,20	0,8	0,85	35 x 35	ECS2HKC151M◇◇△△3535
		1474	737	0,20	0,9	0,98	25 x 50	ECS2HKC181M◇◇△△2550
270	270	1474	737	0,20	0,9	1,01	30 x 45	ECS2HKC181M◇◇△△3045
		1206	603	0,20	1,1	1,12	30 x 50	ECS2HKC221M◇◇△△3050
330	330	1206	603	0,20	1,1	1,12	35 x 35	ECS2HKC221M◇◇△△3535
		983	492	0,20	1,4	1,25	30 x 50	ECS2HKC271M◇◇△△3050
390	390	983	492	0,20	1,4	1,25	35 x 40	ECS2HKC271M

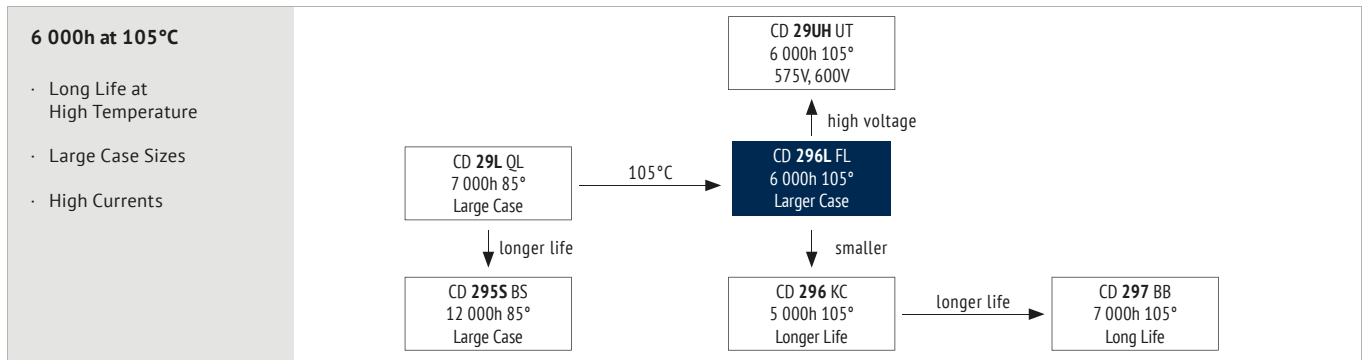

**ITEM CHARACTERISTICS**

Operating Temperature Range (°C)	-40 ~ +105	-25 ~ +105
Voltage Range (V)	350 ~ 420	450 ~ 550
Capacitance Range (µF)	390 ~ 3 000	
Capacitance Tolerance (20°C, 120Hz)	± 20%	

**!** The usage at lower temperatures than indicated may be possible. Please contact the Jianghai Europe sales office for approval.

Leakage Current: After 5 minutes at 20°C application of rated voltage, leakage current is not more than specified in table.

Stability at Low Temperature (Impedance Ratio at 120Hz)	Rated Voltage (V)	350 ~ 420	450 ~ 550
	$Z_{-25°C} / Z_{+20°C}$	4	7
	$Z_{-40°C} / Z_{+20°C}$	7	-

Fast Charge-Discharge: **!** Please contact Jianghai for an appropriate choice of the capacitor or possible technical adaptations, esp. for applications like: Welding, Photoflash, Servo motors, X-Ray


ITEM	USEFUL LIFE		LOAD LIFE	ENDURANCE TEST	SHELF LIFE	
Lifetime	6 000h	> 200 000h	3 000h	4 000h	1 000h	
Leakage Current	Not more than specified value		Not more than specified value	Not more than specified value	Not more than specified value	
Capacitance Change	Within ± 30% of initial value		Within ± 20% of initial value	Within ± 20% of initial value	Within ± 20% of initial value	
Dissipation Factor	Not more than 300% of specified value		Not more than 200% of specified value	Not more than 200% of specified value	Not more than 200% of specified value	
Condition: Applied Voltage Applied Current Applied Temperature	$U_R$ $I_R$ 105°C	$U_R$ $1,2 \times I_R$ 40°C	$U_R$ $I_R$ 105°C	$U_R$ $I_R = 0$ 105°C IEC 60384	$U_R = 0$ $I_R = 0$ 105°C	After test: $U_R$ to be applied for 30 min > 24h before measurement

**MULTIPLIER FOR RIPPLE CURRENT (FREQUENCY COEFFICIENT)**

Frequency	50Hz	120Hz	300Hz	1kHz	10kHz	≥ 50 kHz
Factor	0,80	1,00	1,16	1,30	1,41	1,43

Multipliers for typical operating conditions.

**MULTIPLIER FOR LIFETIME (LIFETIME DIAGRAM)**

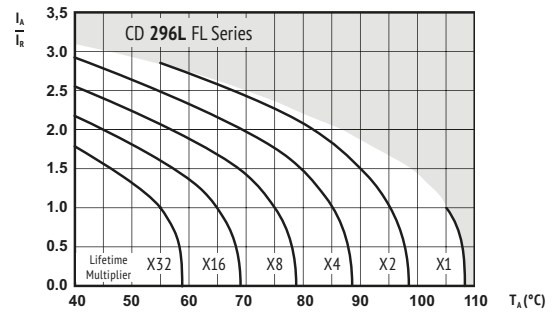

$I_A$  = actual ripple current at 120Hz,  
 $I_R$  = rated ripple current at 120Hz, 105°C  
 Multiplier of Useful Life as a function of ambient temperature & ripple current load

**!** Max. Current Snap-In Terminal: 15A. For more current use Lug-Terminals.

**ENVIRONMENTAL**

The products are RoHS, WEEE and REACH compliant. The detailed version please see separate "Environmental Certificates" document or [www.jianghai-europe.com](http://www.jianghai-europe.com)

**! SAFETY FACTOR**

This diagram includes a safety margin. In many cases the allowed current capability/lifetime may be increased. For details and approvals please contact the Jianghai Europe sales office.

SNAP-IN




U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 105°C 10Hz	Size øD x L	ORDER CODE
(V)	(µF)	(mΩ)	(mΩ)		(mA)	(Arms)	(mm)	Details: Page 79
<b>350 (400) 2V</b>	560	356	178	0,15	1,5	2,30	30 x 55	ECS2VFL561M $\diamond\diamond\Delta\Delta$ 3055
		356	178	0,15	1,5	2,33	35 x 40	ECS2VFL561M $\diamond\diamond\Delta\Delta$ 3540
	680	293	146	0,15	1,5	2,73	35 x 50	ECS2VFL681M $\diamond\diamond\Delta\Delta$ 3550
		293	146	0,15	1,5	2,68	40 x 40	ECS2VFL681M $\diamond\diamond\Delta\Delta$ 4040
	820	243	121	0,15	1,5	2,99	35 x 60	ECS2VFL821M $\diamond\diamond\Delta\Delta$ 3560
		243	121	0,15	1,5	3,05	40 x 45	ECS2VFL821M $\diamond\diamond\Delta\Delta$ 4045
		243	121	0,15	1,5	2,85	45 x 40	ECS2VFL821M $\diamond\diamond\Delta\Delta$ 4540
	1 000	199	100	0,15	1,5	3,50	35 x 65	ECS2VFL102M $\diamond\diamond\Delta\Delta$ 3565
		199	100	0,15	1,5	3,37	40 x 55	ECS2VFL102M $\diamond\diamond\Delta\Delta$ 4055
	1 200	199	100	0,15	1,5	3,06	45 x 45	ECS2VFL102M $\diamond\diamond\Delta\Delta$ 4545
		166	83	0,15	1,5	3,81	35 x 75	ECS2VFL122M $\diamond\diamond\Delta\Delta$ 3575
	1 500	166	83	0,15	1,5	3,81	40 x 65	ECS2VFL122M $\diamond\diamond\Delta\Delta$ 4065
		166	83	0,15	1,5	3,47	45 x 50	ECS2VFL122M $\diamond\diamond\Delta\Delta$ 4550
	1 800	133	66	0,15	1,5	4,62	40 x 80	ECS2VFL152M $\diamond\diamond\Delta\Delta$ 4080
		133	66	0,15	1,5	4,27	45 x 65	ECS2VFL152M $\diamond\diamond\Delta\Delta$ 4565
	2 200	111	55	0,15	1,5	5,43	40 x 95	ECS2VFL182M $\diamond\diamond\Delta\Delta$ 4095
		111	55	0,15	1,5	5,10	45 x 75	ECS2VFL182M $\diamond\diamond\Delta\Delta$ 4575
	2 700	91	45	0,15	1,5	5,86	45 x 90	ECS2VFL222M $\diamond\diamond\Delta\Delta$ 4590
		91	45	0,15	1,5	5,86	50 x 75	ECS2VFL222M $\diamond\diamond\Delta\Delta$ 5075
	3 300	74	37	0,15	1,5	6,77	45 x 100	ECS2VFL272M $\diamond\diamond\Delta\Delta$ 45100
		74	37	0,15	1,5	6,77	50 x 90	ECS2VFL272M $\diamond\diamond\Delta\Delta$ 5090
		61	30	0,15	1,5	6,77	50 x 105	ECS2VFL352M $\diamond\diamond\Delta\Delta$ 50105

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 105°C 10Hz	Size øD x L	ORDER CODE
(V)	(µF)	(mΩ)	(mΩ)		(mA)	(Arms)	(mm)	Details: Page 79
<b>400 (450) 2G</b>	470	424	169	0,15	1,5	2,11	35 x 45	ECS2GFL471M $\diamond\diamond\Delta\Delta$ 3545
		424	169	0,15	1,5	2,14	40 x 40	ECS2GFL471M $\diamond\diamond\Delta\Delta$ 4040
	560	356	142	0,15	1,5	2,48	35 x 50	ECS2GFL561M $\diamond\diamond\Delta\Delta$ 3550
		356	142	0,15	1,5	2,43	40 x 45	ECS2GFL561M $\diamond\diamond\Delta\Delta$ 4045
	680	356	142	0,15	1,5	2,35	45 x 40	ECS2GFL561M $\diamond\diamond\Delta\Delta$ 4540
		293	117	0,15	1,5	2,73	35 x 60	ECS2GFL681M $\diamond\diamond\Delta\Delta$ 3560
		293	117	0,15	1,5	2,78	40 x 50	ECS2GFL681M $\diamond\diamond\Delta\Delta$ 4050
	820	293	117	0,15	1,5	2,59	45 x 40	ECS2GFL681M $\diamond\diamond\Delta\Delta$ 4540
		243	97	0,15	1,5	3,17	35 x 65	ECS2GFL821M $\diamond\diamond\Delta\Delta$ 3565
	1 000	243	97	0,15	1,5	3,05	40 x 55	ECS2GFL821M $\diamond\diamond\Delta\Delta$ 4055
		243	97	0,15	1,5	2,77	45 x 45	ECS2GFL821M $\diamond\diamond\Delta\Delta$ 4545
	1 200	199	80	0,15	1,5	3,48	35 x 80	ECS2GFL102M $\diamond\diamond\Delta\Delta$ 3580
		199	80	0,15	1,5	3,48	40 x 65	ECS2GFL102M $\diamond\diamond\Delta\Delta$ 4065
	1 500	199	80	0,15	1,5	3,17	45 x 55	ECS2GFL102M $\diamond\diamond\Delta\Delta$ 4555
		166	66	0,15	1,5	4,13	35 x 90	ECS2GFL122M $\diamond\diamond\Delta\Delta$ 3590
	1 800	166	66	0,15	1,5	4,13	40 x 80	ECS2GFL122M $\diamond\diamond\Delta\Delta$ 4080
		166	66	0,15	1,5	3,70	45 x 60	ECS2GFL122M $\diamond\diamond\Delta\Delta$ 4560
	2 200	133	53	0,15	1,5	4,39	40 x 90	ECS2GFL152M $\diamond\diamond\Delta\Delta$ 4090
		133	53	0,15	1,5	4,39	45 x 75	ECS2GFL152M $\diamond\diamond\Delta\Delta$ 4575
	2 700	111	44	0,15	1,5	5,30	45 x 90	ECS2GFL182M $\diamond\diamond\Delta\Delta$ 4590
		111	44	0,15	1,5	5,30	50 x 80	ECS2GFL182M $\diamond\diamond\Delta\Delta$ 5080
		91	36	0,15	1,5	5,90	50 x 90	ECS2GFL222M $\diamond\diamond\Delta\Delta$ 5090
		74	29	0,15	1,5	6,50	50 x 105	ECS2GFL272M $\diamond\diamond\Delta\Delta$ 50105

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 105°C 10Hz	Size øD x L	ORDER CODE
(V)	(µF)	(mΩ)	(mΩ)		(mA)	(Arms)	(mm)	Details: Page 79
<b>420 (470) 2X</b>	390	511	203	0,15	1,5	1,92	35 x 40	ECS2XFL391M $\diamond\diamond\Delta\Delta$ 3540
		511	203	0,15	1,5	1,95	40 x 35	ECS2XFL391M $\diamond\diamond\Delta\Delta$ 4035
	470	424	169	0,15	1,5	2,27	35 x 45	ECS2XFL471M $\diamond\diamond\Delta\Delta$ 3545
		424	169	0,15	1,5	2,23	40 x 40	ECS2XFL471M $\diamond\diamond\Delta\Delta$ 4040
	560	356	142	0,15	1,5	2,56	35 x 50	ECS2XFL561M $\diamond\diamond\Delta\Delta$ 3550
		356	142	0,15	1,5	2,52	40 x 45	ECS2XFL561M $\diamond\diamond\Delta\Delta$ 4045
	680	356	142	0,15	1,5	2,35	45 x 40	ECS2XFL561M $\diamond\diamond\Delta\Delta$ 4540
		293	117	0,15	1,5	2,81	35 x 60	ECS2XFL681M $\diamond\diamond\Delta\Delta$ 3560
		293	117	0,15	1,5	2,78	40 x 50	ECS2XFL681M $\diamond\diamond\Delta\Delta$ 4050
	820	293	117	0,15	1,5	2,52	45 x 45	ECS2XFL681M $\diamond\diamond\Delta\Delta$ 4545
		243	97	0,15	1,5	3,26	35 x 70	ECS2XFL821M $\diamond\diamond\Delta\Delta$ 3570
	1 000	243	97	0,15	1,5	3,05	40 x 60	ECS2XFL821M $\diamond\diamond\Delta\Delta$ 4060
		243	97	0,15	1,5	2,87	45 x 50	ECS2XFL821M $\diamond\diamond\Delta\Delta$ 4550
	1 200	199	80	0,15	1,5	3,67	35 x 80	ECS2XFL102M $\diamond\diamond\Delta\Delta$ 3580
		199	80	0,15	1,5	3,67	40 x 70	ECS2XFL102M $\diamond\diamond\Delta\Delta$ 4070
	1 500	199	80	0,15	1,5	3,38	45 x 60	ECS2XFL102M $\diamond\diamond\Delta\Delta$ 4560
		166	66	0,15	1,5	4,33	40 x 80	ECS2XFL122M $\diamond\diamond\Delta\Delta$ 4080
		166	66	0,15	1,5	3,92	45 x 65	ECS2XFL122M $\diamond\diamond\Delta\Delta$ 4565
		133	53	0,15	1,5	4,62	45 x 80	ECS2XFL152M $\diamond\diamond\Delta\Delta$ 4580
		133	53	0,15	1,5	4,62	50 x 75	ECS2XFL152M $\diamond\diamond\Delta\Delta$ 5075

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 105°C 10Hz	Size øD x L	ORDER CODE
(V)	(µF)	(mΩ)	(mΩ)		(mA)	(Arms)	(mm)	Details: Page 79
<b>420 (470) 2X</b>	1 800	111	44	0,15	1,5	5,42	45 x 95	ECS2XFL182M $\diamond\diamond\Delta\Delta$ 4595
		111	44	0,15	1,5	5,42	50 x 85	ECS2XFL182M $\diamond\diamond\Delta\Delta$ 5085
	2 200	91	36	0,15	1,5	6,00	50 x 100	ECS2XFL222M $\diamond\diamond\Delta\Delta$ 50100
<b>450 (500) 2W</b>	390	511	225	0,15	1,5	2,00	35 x 40	ECS2WFL391M $\diamond\diamond\Delta\Delta$ 3540
		424	186	0,15	1,5	2,27	35 x 45	ECS2WFL471M $\diamond\diamond\Delta\Delta$ 3545
	470	424	186	0,15	1,5	2,23	40 x 40	ECS2WFL471M $\diamond\diamond\Delta\Delta$ 4040
		424	186	0,15	1,5	2,15	45 x 35	ECS2WFL471M $\diamond\diamond\Delta\Delta$ 4535
	560	356	156	0,15	1,5	2,47	35 x 55	ECS2WFL561M $\diamond\diamond\Delta\Delta$ 3555
		356	156	0,15	1,5	2,52	40 x 50	ECS2WFL561M $\diamond\diamond\Delta\Delta$ 4050
	680	356	156	0,15	1,5	2,35	45 x 40	ECS2WFL561M $\diamond\diamond\Delta\Delta$ 4540
		293	129	0,15	1,5	2,89	35 x 65	ECS2WFL681M $\diamond\diamond\Delta\Delta$ 3565
		293	129	0,15	1,5	2,78	40 x 60	ECS2WFL681M $\diamond\diamond\Delta\Delta$ 4060
	820	293	129	0,15	1,5	2,61	45 x 50	ECS2WFL681M $\diamond\diamond\Delta\Delta$ 4550
		243	107	0,15	1,5	3,24	35 x 75	ECS2WFL821M $\diamond\diamond\Delta\Delta$ 3575
	1 000	243	107	0,15	1,5	3,24	40 x 65	ECS2WFL821M $\diamond\diamond\Delta\Delta$ 4065
		243	107	0,15	1,5	3,10	45 x 50	ECS2WFL821M $\diamond\diamond\Delta\Delta$ 4550
	1 200	199	88	0,15	1,5	3,77	35 x 90	ECS2WFL102M $\diamond\diamond\Delta\Delta$ 3590
		199	88	0,15	1,5	3,77	40 x 80	ECS2WFL102M $\diamond\diamond\Delta\Delta$ 4080
	1 500	199	88	0,15	1,5	3,68	45 x 65	ECS2WFL102M $\diamond\diamond\Delta\Delta$ 4565
		166	73	0,15	1,5	4,43	40 x 95	ECS2WFL122M $\diamond\diamond\Delta\Delta$ 4095
	1 800	166	73	0,15	1,5	4,23	45 x 75	ECS2WFL122M $\diamond\diamond\Delta\Delta$ 4575
		166	73	0,15	1,5	4,23	50 x 65	ECS2WFL122M $\diamond\diamond\Delta\Delta$ 5065
	1 500	133	58	0,15	1,5	4,84	40 x 100	ECS2WFL152M $\diamond\diamond\Delta\Delta$ 40100
		133	58	0,15	1,5	4,84	45 x 90	ECS2WFL152M $\diamond\diamond\Delta\Delta$ 4590
	1 800	111	49	0,15	1,5	5,30	45 x 105	ECS2WFL182M $\diamond\diamond\Delta\Delta$ 45105
		111	49	0,15	1,5	5,30	50 x 95	ECS2WFL182M $\diamond\diamond\Delta\Delta$ 5095

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 105°C 10Hz	Size øD x L	ORDER CODE
(V)	(µF)	(mΩ)	(mΩ)		(mA)	(Arms)	(mm)	Details: Page 79
<b>500 (550) 2H</b>	390	511	225	0,15	1,5	1,80	35 x 50	ECS2HFL391M $\diamond\diamond\Delta\Delta$ 3550
		511	225	0,15	1,5	1,80	40 x 45	ECS2HFL391M $\diamond\diamond\Delta\Delta$ 4045
	470	424	186	0,15	1,5	2,00	35 x 55	ECS2HFL471M $\diamond\diamond\Delta\Delta$ 3555
		424	186	0,15	1,5	2,00	40 x 50	ECS2HFL471M $\diamond\diamond\Delta\Delta$ 4050
	560	424	186	0,15	1,5	2,00	45 x 40	ECS2HFL471M $\diamond\diamond\Delta\Delta$ 4540
		356	156	0,15	1,5	2,25	35 x 65	ECS2HFL561M $\diamond\diamond\Delta\Delta$ 3565
	680	356	156	0,15	1,5	2,25	40 x 55	ECS2HFL561M $\diamond\diamond\Delta\Delta$ 4055
		356	156	0,15	1,5	2,25	45 x 50	ECS2HFL561M $\diamond\diamond\Delta\Delta$ 4550
	820	293	129	0,15	1,5	2,60	35 x 75	ECS2HFL681M $\diamond\diamond\Delta\Delta$ 3575
		293	129	0,15	1,5	2,60	40 x 70	ECS2HFL681M $\diamond\diamond\Delta\Delta$ 4070
	1 000	293	129	0,15	1,5	2,60	45 x	

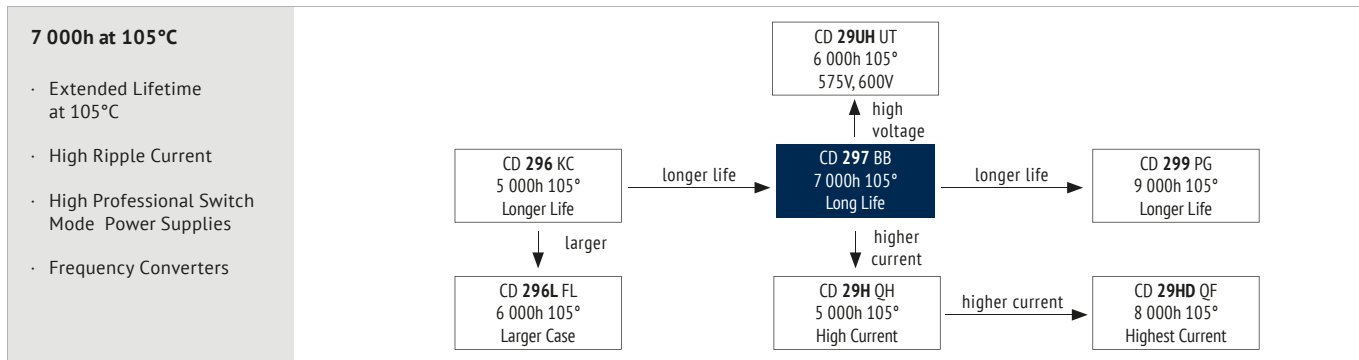

**ITEM CHARACTERISTICS**

Operating Temperature Range (°C)	-40 ~ +105	-25 ~ +105
Voltage Range (V)	10 ~ 100	160 ~ 550
Capacitance Range (µF)	47 ~ 56 000	
Capacitance Tolerance (20°C, 120Hz)	± 20%	

**!** The usage at lower temperatures than indicated may be possible. Please contact the Jianghai Europe sales office for approval.

Leakage Current: After 5 minutes at 20°C application of rated voltage, leakage current is not more than specified in table.

Stability at Low Temperature (Impedance Ratio at 120Hz)	Rated Voltage (V)	10 ~ 100	160 ~ 250	315 ~ 550
	Z <sub>-25°C</sub> / Z <sub>+20°C</sub>	4	3	8
	Z <sub>-40°C</sub> / Z <sub>+20°C</sub>	15	-	-

Fast Charge-Discharge: **!** Please contact Jianghai for an appropriate choice of the capacitor or possible technical adaptations, esp. for applications like: Welding, Photoflash, Servo motors, X-Ray


ITEM	USEFUL LIFE		LOAD LIFE	ENDURANCE TEST	SHELF LIFE	
Lifetime	7 000h	> 200 000h	5 000h	5 000h	1 000h	
Leakage Current	Not more than specified value		Not more than specified value	Not more than specified value	Not more than specified value	
Capacitance Change	Within ± 30% of initial value		Within ± 20% of initial value	Within ± 20% of initial value	Within ± 20% of initial value	
Dissipation Factor	Not more than 300% of specified value		Not more than 200% of specified value	Not more than 200% of specified value	Not more than 200% of specified value	
Condition: Applied Voltage Applied Current Applied Temperature	U <sub>R</sub> I <sub>R</sub> 105°C	U <sub>R</sub> 1,6 x I <sub>R</sub> 40°C	U <sub>R</sub> I <sub>R</sub> 105°C	U <sub>R</sub> I <sub>R</sub> = 0 105°C IEC 60384	U <sub>R</sub> = 0 I <sub>R</sub> = 0 105°C	After test: U <sub>R</sub> to be applied for 30 min > 24h before measurement

**MULTIPLIER FOR RIPPLE CURRENT (FREQUENCY COEFFICIENT)**

Frequency	50Hz	120Hz	500Hz	1kHz	10kHz	≥ 40 kHz
Rated Voltage (V)						
10 ~ 100	0,90	1,00	1,10	1,15	1,15	1,15
160 ~ 250	0,80	1,00	1,20	1,30	1,45	1,50
≥ 315	0,80	1,00	1,20	1,30	1,42	1,45

Multipliers for typical operating conditions.

**MULTIPLIER FOR LIFETIME (LIFETIME DIAGRAM)**

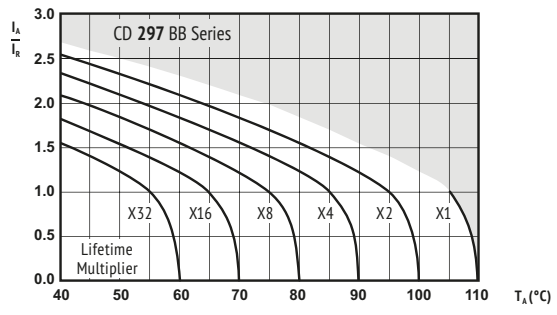

I<sub>A</sub> = actual ripple current at 120Hz, I<sub>R</sub> = rated ripple current at 120Hz, 105°C  
Multiplier of Useful Life as a function of ambient temperature & ripple current load

**!** Max. Current Snap-In Terminal: 15A. For more current use Lug-Terminals.

**ENVIRONMENTAL**

The products are RoHS, WEEE and REACH compliant. The detailed version please see separate "Environmental Certificates" document or www.jianghai-europe.com

**! SAFETY FACTOR**

This diagram includes a safety margin. In many cases the allowed current capability/lifetime may be increased. For details and approvals please contact the Jianghai Europe sales office.

SNAP-IN



U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 105°C 120Hz	Size øD x L (mm)	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 79	
<b>10</b> (13) 1A	8 200	89	62	0,55	0,8	1,36	22 x 25	ECS1ABB822M◇◇△△2225	
	10 000	73	51	0,55	1,0	1,65	22 x 30	ECS1ABB103M◇◇△△2230	
	12 000	61	43	0,55	1,2	1,85	22 x 35	ECS1ABB123M◇◇△△2235	
		61	43	0,55	1,2	1,82	25 x 25	ECS1ABB123M◇◇△△2525	
	15 000	49	34	0,55	1,5	2,12	22 x 40	ECS1ABB153M◇◇△△2240	
		49	34	0,55	1,5	2,11	25 x 30	ECS1ABB153M◇◇△△2530	
	18 000	49	34	0,55	1,5	2,14	30 x 25	ECS1ABB153M◇◇△△3025	
		41	28	0,55	1,5	2,40	22 x 45	ECS1ABB183M◇◇△△2245	
	22 000	41	28	0,55	1,5	2,32	25 x 35	ECS1ABB183M◇◇△△2535	
		34	23	0,55	1,5	2,59	25 x 40	ECS1ABB223M◇◇△△2540	
	27 000	34	23	0,55	1,5	2,73	30 x 30	ECS1ABB223M◇◇△△3030	
		28	19	0,55	1,5	3,01	25 x 45	ECS1ABB273M◇◇△△2545	
	33 000	33	23	0,55	1,5	3,13	30 x 35	ECS1ABB273M◇◇△△3035	
		28	19	0,55	1,5	3,05	35 x 30	ECS1ABB273M◇◇△△3530	
	39 000	23	16	0,55	1,5	3,43	25 x 50	ECS1ABB333M◇◇△△2550	
		23	16	0,55	1,5	3,53	30 x 40	ECS1ABB333M◇◇△△3040	
	47 000	23	16	0,55	1,5	3,49	35 x 35	ECS1ABB333M◇◇△△3535	
		19	13	0,55	1,5	3,78	30 x 45	ECS1ABB393M◇◇△△3045	
	56 000	19	13	0,55	1,5	3,96	35 x 40	ECS1ABB393M◇◇△△3540	
		16	11	0,55	1,5	4,58	30 x 50	ECS1ABB473M◇◇△△3050	
		16	11	0,55	1,5	4,60	35 x 45	ECS1ABB473M◇◇△△3545	
		14	9	0,55	1,5	5,06	35 x 50	ECS1ABB563M◇◇△△3550	
	<b>16</b> (20) 1C	5 600	119	83	0,50	0,9	1,44	22 x 25	ECS1CBB562M◇◇△△2225
		6 800	98	68	0,50	1,1	1,66	22 x 30	ECS1CBB682M◇◇△△2230
8 200		81	57	0,50	1,3	1,67	25 x 25	ECS1CBB822M◇◇△△2525	
		67	46	0,50	1,5	2,08	22 x 35	ECS1CBB103M◇◇△△2235	
10 000		67	46	0,50	1,5	2,07	25 x 30	ECS1CBB103M◇◇△△2530	
		56	39	0,50	1,5	2,36	22 x 40	ECS1CBB123M◇◇△△2240	
12 000		56	39	0,50	1,5	2,37	25 x 35	ECS1CBB123M◇◇△△2535	
		56	39	0,50	1,5	2,33	30 x 25	ECS1CBB123M◇◇△△3025	
15 000		45	31	0,50	1,5	2,69	22 x 45	ECS1CBB153M◇◇△△2245	
		45	31	0,50	1,5	2,72	25 x 40	ECS1CBB153M◇◇△△2540	
18 000		45	31	0,50	1,5	2,54	30 x 30	ECS1CBB153M◇◇△△3030	
		37	26	0,50	1,5	3,06	25 x 45	ECS1CBB183M◇◇△△2545	
22 000		37	26	0,50	1,5	3,02	30 x 35	ECS1CBB183M◇◇△△3035	
		37	26	0,50	1,5	3,09	35 x 30	ECS1CBB183M◇◇△△3530	
27 000		31	21	0,50	1,5	3,39	25 x 50	ECS1CBB223M◇◇△△2550	
		31	21	0,50	1,5	3,46	30 x 40	ECS1CBB223M◇◇△△3040	
33 000		25	17	0,50	1,5	3,88	30 x 45	ECS1CBB273M◇◇△△3045	
		25	17	0,50	1,5	3,85	35 x 35	ECS1CBB273M◇◇△△3535	
39 000		21	14	0,50	1,5	4,33	30 x 50	ECS1CBB333M◇◇△△3050	
		21	14	0,50	1,5	4,33	35 x 40	ECS1CBB333M◇◇△△3540	
47 000		18	12	0,50	1,5	4,96	35 x 45	ECS1CBB393M◇◇△△3545	
		15	10	0,50	1,5	5,49	35 x 50	ECS1CBB473M◇◇△△3550	
<b>25</b> (32) 1E		3 900	154	107	0,45	1,0	1,31	22 x 25	ECS1EBB392M◇◇△△2225
		4 700	127	89	0,45	1,2	1,55	22 x 30	ECS1EBB472M◇◇△△2230
	5 600	107	75	0,45	1,4	1,77	22 x 35	ECS1EBB562M◇◇△△2235	
		107	75	0,45	1,4	1,76	25 x 25	ECS1EBB562M◇◇△△2525	
	6 800	88	62	0,45	1,5	2,02	22 x 40	ECS1EBB682M◇◇△△2240	
		88	62	0,45	1,5	1,88	25 x 30	ECS1EBB682M◇◇△△2530	
	8 200	73	51	0,45	1,5	2,27	22 x 45	ECS1EBB822M◇◇△△2245	
		73	51	0,45	1,5	2,18	25 x 35	ECS1EBB822M◇◇△△2535	
	10 000	73	51	0,45	1,5	2,19	30 x 25	ECS1EBB822M◇◇△△3025	
		60	42	0,45	1,5	2,56	22 x 50	ECS1EBB103M◇◇△△2250	
	12 000	60	42	0,45	1,5	2,53	25 x 40	ECS1EBB103M◇◇△△2540	
		60	42	0,45	1,5	2,38	30 x 30	ECS1EBB103M◇◇△△3030	
	15 000	50	35	0,45	1,5	2,79	25 x 45	ECS1EBB123M◇◇△△2545	
		50	35	0,45	1,5	2,70	30 x 35	ECS1EBB123M◇◇△△3035	
	18 000	50	35	0,45	1,5	2,76	35 x 30	ECS1EBB123M◇◇△△3530	
		40	28	0,45	1,5	3,13	30 x 40	ECS1EBB153M◇◇△△3040	
	22 000	34	23	0,45	1,5	3,52	30 x 45	ECS1EBB183M◇◇△△3045	
		34	23	0,45	1,5	3,50	35 x 35	ECS1EBB183M◇◇△△3535	
	27 000	28	19	0,45	1,5	3,92	30 x 50	ECS1EBB223M◇◇△△3050	
		28	19	0,45	1,5	3,95	35 x 40	ECS1EBB223M◇◇△△3540	
		23	16	0,45	1,5	4,72	35 x 50	ECS1EBB273M◇◇△△3550	

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 105°C 120Hz	Size øD x L (mm)	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 79	
<b>35</b> (44) 1V	2 700	197	138	0,40	0,9	1,29	22 x 25	ECS1VBB272M◇◇△△2225	
	3 300	161	113	0,40	1,2	1,54	22 x 30	ECS1VBB332M◇◇△△2230	
	3 900	137	95	0,40	1,4	1,77	22 x 35	ECS1VBB392M◇◇△△2235	
		137	95	0,40	1,4	1,75	25 x 25	ECS1VBB392M◇◇△△2525	
	4 700	113	79	0,40	1,5	2,01	22 x 40	ECS1VBB472M◇◇△△2240	
		113	79	0,40	1,5	1,97	25 x 30	ECS1VBB472M◇◇△△2530	
	5 600	95	66	0,40	1,5	2,25	22 x 45	ECS1VBB562M◇◇△△2245	
		95	66	0,40	1,5	2,18	25 x 35	ECS1VBB562M◇◇△△2535	
	6 800	95	66	0,40	1,5	2,08	30 x 25	ECS1VBB562M◇◇△△3025	
		79	55	0,40	1,5	2,49	22 x 50	ECS1VBB682M◇◇△△2250	
	8 200	79	55	0,40	1,5	2,45	25 x 40	ECS1VBB682M◇◇△△2540	
		79	55	0,40	1,5	2,28	30 x 30	ECS1VBB682M◇◇△△3030	
	10 000	65	45	0,40	1,5	2,80	25 x 45	ECS1VBB822M◇◇△△2545	
		65	45	0,40	1,5	2,69	30 x 35	ECS1VBB822M◇◇△△3035	
	12 000	54	37	0,40	1,5	3,04	30 x 40	ECS1VBB103M◇◇△△3040	
		54	37	0,40	1,5	2,78	35 x 30	ECS1VBB103M◇◇△△3530	
	15 000	45	31	0,40	1,5	3,38	30 x 45	ECS1VBB123M◇◇△△3045	
		45	31	0,40	1,5	3,30	35 x 35	ECS1VBB123M◇◇△△3535	
	18 000	36	25	0,40	1,5	3,98	35 x 40	ECS1VBB153M◇◇△△3540	
		30	21	0,40	1,5	4,40	35 x 45	ECS1VBB183M◇◇△△3545	
	<b>50</b> (63) 1H	1 500	310	217	0,35	0,8	1,21	22 x 25	ECS1HBB152M◇◇△△2225
		2 200	212	148	0,35	1,1	1,52	22 x 30	ECS1HBB222M◇◇△△2230
		2 700	212	148	0,35	1,1	1,46	25 x 25	ECS1HBB222M◇◇△△2525
			172	120	0,35	1,4	1,77	22 x 35	ECS1HBB272M◇◇△△2235
3 300		172	120	0,35	1,4	1,76	25 x 30	ECS1HBB272M◇◇△△2530	
		141	99	0,35	1,5	2,02	22 x 40	ECS1HBB332M◇◇△△2240	
3 900		141	99	0,35	1,5	1,92	30 x 25	ECS1HBB332M◇◇△△3025	
		120	83	0,35	1,5	2,27	22 x 45	ECS1HBB392M◇◇△△2245	
4 700		120	83	0,35	1,5	2,20	25 x 35	ECS1HBB392M◇◇△△2535	
		120	83	0,35	1,5	2,19	30 x 30	ECS1HBB392M◇◇△△3030	
5 600		99	69	0,35	1,5	2,43	25 x 40	ECS1HBB472M◇◇△△2540	
		83	58	0,35	1,5	2,72	25 x 45	ECS1HBB562M◇◇△△2545	
6 800		83	58	0,35	1,5	2,58	30 x 35	ECS1HBB562M◇◇△△3035	
		83	58	0,35	1,5	2,35	35 x 30	ECS1HBB562M◇◇△△3530	
8 200		69	48	0,35	1,5	3,01	30 x 40	ECS1HBB682M◇◇△△3040	
		69	48	0,35	1,5	2,91	35 x 35	ECS1HBB682M◇◇△△3535	
10 000		57	40	0,35	1,5	3,63	30 x 50	ECS1HBB822M◇◇△△3050	
		57	40	0,35	1,5	3,36	35 x 40	ECS1HBB822M◇◇△△3540	
12 000		47	33	0,35	1,5	3,79	35 x 45	ECS1HBB103M◇◇△△3545	
		39	27	0,35	1,5	4,06	35 x 50	ECS1HBB123M◇◇△△3550	
<b>63</b> (79) 1J		1 000	398	279	0,30	0,6	1,10	22 x 25	ECS1JBB102M◇◇△△2225
		1 500	266	186	0,30	0,9	1,41	22 x 30	ECS1JBB152M◇◇△△2230
		1 800	266	186	0,30	0,9	1,38	25 x 25	ECS1JBB152M◇◇△△2525
			222	155	0,30	1,1	1,62	22 x 35	ECS1JBB182M◇◇△△2235
	2 200	222	155	0,30	1,1	1,63	25 x 30	ECS1JBB182M◇◇△△2530	
		181	127	0,30	1,4	1,85	22 x 40	ECS1JBB222M◇◇△△2240	
	2 700	181	127	0,30	1,4	1,80	30 x 25	ECS1JBB222M◇◇△△3025	
		148	103	0,30	1,5	2,10	22 x 45	ECS1JBB272M◇◇△△2245	
	3 300	148	103	0,30	1,5	2,03	25 x 35	ECS1JBB272M◇◇△△2535	
		148	103	0,30	1,5	2,01	30 x 30	ECS1JBB272M◇◇△△3030	
	3 900	121	84	0,30	1,5	2,33	25 x 40	ECS1JBB332M◇◇△△2540	
		103	72	0,30	1,5	2,58	25 x 45	ECS1JBB392M◇◇△△2545	
	4 700	103	72	0,30	1,5	2,46	30 x 35	ECS1JBB392M◇◇△△3035	
		103	72	0,30	1,5	2,31	35 x 30	ECS1JBB392M◇◇△△3530	
	5 600	85	59	0,30	1,5	2,82	30 x 40	ECS1JBB472M◇◇△△3040	
		85	59	0,30	1,5	2,77	35 x 35	ECS1JBB472M◇◇△△3535	
	6 800	72	50	0,30	1,5	3,22	30 x 45	ECS1JBB562M◇◇△△3045	
		72	50	0,30	1,5	3,20	35 x 40	ECS1JBB562M◇◇△△3540	
	8 200</								

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 105°C 105Hz	Size øD x L (mm)	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 79
100 (125) 2A	1 000	266	186	0,20	1,0	1,56	22 x 40	ECS2ABB102M◇◇△△2240
		266	186	0,20	1,0	1,52	25 x 30	ECS2ABB102M◇◇△△2530
		266	186	0,20	1,0	1,47	30 x 25	ECS2ABB102M◇◇△△3025
	1 200	222	155	0,20	1,2	1,76	22 x 45	ECS2ABB122M◇◇△△2245
		222	155	0,20	1,2	1,76	25 x 35	ECS2ABB122M◇◇△△2535
		222	155	0,20	1,2	1,76	30 x 30	ECS2ABB122M◇◇△△3030
	1 500	177	124	0,20	1,5	2,00	22 x 50	ECS2ABB152M◇◇△△2250
		177	124	0,20	1,5	2,03	25 x 40	ECS2ABB152M◇◇△△2540
	1 800	148	103	0,20	1,5	2,29	25 x 45	ECS2ABB182M◇◇△△2545
		148	103	0,20	1,5	2,19	30 x 35	ECS2ABB182M◇◇△△3035
	2 200	148	103	0,20	1,5	2,15	35 x 30	ECS2ABB182M◇◇△△3530
		121	84	0,20	1,5	2,52	30 x 40	ECS2ABB222M◇◇△△3040
	2 700	121	84	0,20	1,5	2,48	35 x 35	ECS2ABB222M◇◇△△3535
		99	69	0,20	1,5	2,86	30 x 45	ECS2ABB272M◇◇△△3045
	3 300	99	69	0,20	1,5	2,87	35 x 40	ECS2ABB272M◇◇△△3540
		81	56	0,20	1,5	3,25	35 x 45	ECS2ABB332M◇◇△△3545
	3 900	69	48	0,20	1,5	3,56	35 x 50	ECS2ABB392M◇◇△△3550

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 105°C 105Hz	Size øD x L (mm)	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 79
160 (200) 2C	220	905	633	0,15	0,4	0,63	22 x 25	ECS2CBB221M◇◇△△2225
		737	516	0,15	0,4	0,76	22 x 30	ECS2CBB271M◇◇△△2230
	330	603	422	0,15	0,5	0,90	22 x 35	ECS2CBB331M◇◇△△2235
		603	422	0,15	0,5	0,84	25 x 25	ECS2CBB331M◇◇△△2525
	390	511	357	0,15	0,6	0,97	25 x 30	ECS2CBB391M◇◇△△2530
		511	357	0,15	0,6	1,00	30 x 25	ECS2CBB391M◇◇△△3025
	470	424	296	0,15	0,8	1,11	22 x 40	ECS2CBB471M◇◇△△2240
		424	296	0,15	0,8	1,14	25 x 35	ECS2CBB471M◇◇△△2535
	560	424	296	0,15	0,8	1,17	30 x 30	ECS2CBB471M◇◇△△3030
		356	249	0,15	0,9	1,26	22 x 45	ECS2CBB561M◇◇△△2245
	680	293	205	0,15	1,1	1,44	22 x 50	ECS2CBB681M◇◇△△2250
		293	205	0,15	1,1	1,43	25 x 40	ECS2CBB681M◇◇△△2540
	820	293	205	0,15	1,1	1,50	30 x 35	ECS2CBB681M◇◇△△3035
		243	170	0,15	1,3	1,63	25 x 45	ECS2CBB821M◇◇△△2545
	1 000	243	170	0,15	1,3	1,66	30 x 40	ECS2CBB821M◇◇△△3040
		243	170	0,15	1,3	1,63	35 x 30	ECS2CBB821M◇◇△△3530
	1 200	199	139	0,15	1,5	1,89	30 x 45	ECS2CBB102M◇◇△△3045
		199	139	0,15	1,5	1,89	35 x 35	ECS2CBB102M◇◇△△3535
	1 500	166	116	0,15	1,5	2,16	30 x 50	ECS2CBB122M◇◇△△3050
		166	116	0,15	1,5	2,23	35 x 40	ECS2CBB122M◇◇△△3540
	1 800	133	93	0,15	1,5	2,61	35 x 45	ECS2CBB152M◇◇△△3545
	1 800	111	77	0,15	1,5	2,97	35 x 50	ECS2CBB182M◇◇△△3550

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 105°C 105Hz	Size øD x L (mm)	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 79
200 (250) 2D	180	1106	774	0,15	0,4	0,57	22 x 25	ECS2DBB181M◇◇△△2225
		905	633	0,15	0,4	0,70	22 x 30	ECS2DBB221M◇◇△△2230
	270	737	516	0,15	0,5	0,83	22 x 35	ECS2DBB271M◇◇△△2235
		737	516	0,15	0,5	0,76	25 x 25	ECS2DBB271M◇◇△△2525
	330	603	422	0,15	0,7	0,96	22 x 40	ECS2DBB331M◇◇△△2240
		603	422	0,15	0,7	0,90	25 x 30	ECS2DBB331M◇◇△△2530
	390	511	357	0,15	0,8	1,06	25 x 35	ECS2DBB391M◇◇△△2535
		511	357	0,15	0,8	1,02	30 x 25	ECS2DBB391M◇◇△△3025
	470	424	296	0,15	0,9	1,17	22 x 45	ECS2DBB471M◇◇△△2245
		424	296	0,15	0,9	1,22	25 x 40	ECS2DBB471M◇◇△△2540
	560	424	296	0,15	0,9	1,17	30 x 30	ECS2DBB471M◇◇△△3030
		356	249	0,15	1,1	1,39	25 x 45	ECS2DBB561M◇◇△△2545
	680	356	249	0,15	1,1	1,38	30 x 35	ECS2DBB561M◇◇△△3035
		293	205	0,15	1,4	1,58	25 x 50	ECS2DBB681M◇◇△△2550
	820	293	205	0,15	1,4	1,61	30 x 40	ECS2DBB681M◇◇△△3040
		293	205	0,15	1,4	1,49	35 x 30	ECS2DBB681M◇◇△△3530
	1 000	243	170	0,15	1,5	1,85	30 x 45	ECS2DBB821M◇◇△△3045
		243	170	0,15	1,5	1,75	35 x 35	ECS2DBB821M◇◇△△3535
	1 200	199	139	0,15	1,5	2,11	30 x 50	ECS2DBB102M◇◇△△3050
		199	139	0,15	1,5	2,07	35 x 40	ECS2DBB102M◇◇△△3540
	1 500	166	116	0,15	1,5	2,38	35 x 45	ECS2DBB122M◇◇△△3545
	1 500	133	93	0,15	1,5	2,76	35 x 50	ECS2DBB152M◇◇△△3550

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 105°C 105Hz	Size øD x L (mm)	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 79
250 (300) 2E	150	1327	929	0,15	0,4	0,52	22 x 25	ECS2EBB151M◇◇△△2225
		1106	774	0,15	0,5	0,64	22 x 30	ECS2EBB181M◇◇△△2230
	180	1106	774	0,15	0,5	0,62	25 x 25	ECS2EBB181M◇◇△△2525
		905	633	0,15	0,6	0,76	22 x 35	ECS2EBB221M◇◇△△2235

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 105°C 105Hz	Size øD x L (mm)	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 79
250 (300) 2E	220	905	633	0,15	0,6	0,76	25 x 30	ECS2EBB221M◇◇△△2530
		737	516	0,15	0,7	0,88	22 x 40	ECS2EBB271M◇◇△△2240
	270	737	516	0,15	0,7	0,90	25 x 35	ECS2EBB271M◇◇△△2535
		737	516	0,15	0,7	0,85	30 x 25	ECS2EBB271M◇◇△△3025
	330	603	422	0,15	0,8	1,01	22 x 45	ECS2EBB331M◇◇△△2245
		603	422	0,15	0,8	1,00	30 x 30	ECS2EBB331M◇◇△△3030
	390	511	357	0,15	1,0	1,13	22 x 50	ECS2EBB391M◇◇△△2250
		511	357	0,15	1,0	1,13	25 x 40	ECS2EBB391M◇◇△△2540
	470	511	357	0,15	1,0	1,15	30 x 35	ECS2EBB391M◇◇△△3035
		424	296	0,15	1,2	1,29	25 x 45	ECS2EBB471M◇◇△△2545
	560	424	296	0,15	1,2	1,24	35 x 30	ECS2EBB471M◇◇△△3530
		356	249	0,15	1,4	1,45	25 x 50	ECS2EBB561M◇◇△△2550
	680	356	249	0,15	1,4	1,48	30 x 40	ECS2EBB561M◇◇△△3040
		356	249	0,15	1,4	1,49	35 x 35	ECS2EBB561M◇◇△△3535
	820	293	205	0,15	1,5	1,71	30 x 45	ECS2EBB681M◇◇△△3045
		293	205	0,15	1,5	1,74	35 x 40	ECS2EBB681M◇◇△△3540
	1 000	243	170	0,15	1,5	1,94	30 x 50	ECS2EBB821M◇◇△△3050
	1 000	199	139	0,15	1,5	2,20	35 x 45	ECS2EBB102M◇◇△△3545

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 105°C 105Hz	Size øD x L (mm)	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 79
315 (365) 2F	68	2926	1610	0,15	0,2	0,32	22 x 25	ECS2FBB680M◇◇△△2225
		82	2427	1334	0,15	0,3	0,38	22 x 30
	100	1990	1095	0,15	0,3	0,41	25 x 25	ECS2FBB101M◇◇△△2525
		1658	912	0,15	0,4	0,48	22 x 35	ECS2FBB121M◇◇△△2235
	120	1658	912	0,15	0,4	0,49	25 x 30	ECS2FBB121M◇◇△△2530
		1327	730	0,15	0,5	0,56	22 x 40	ECS2FBB151M◇◇△△2240
	150	1327	730	0,15	0,5	0,51	30 x 25	ECS2FBB151M◇◇△△3025
		1106	608	0,15	0,6	0,63	22 x 45	ECS2FBB181M◇◇△△2245
	180	1106	608	0,15	0,6	0,62	25 x 35	ECS2FBB181M◇◇△△2535
		1106	608	0,15	0,6	0,63	30 x 30	ECS2FBB181M◇◇△△3030
	220	905	498	0,15	0,7	0,72	22 x 50	ECS2FBB221M◇◇△△2250
		905	498	0,15	0,7	0,71	25 x 40	ECS2FBB221M◇◇△△2540
	270	905	498	0,15	0,7	0,74	30 x 35	ECS2FBB221M◇◇△△3035
		737	406	0,15	0,9	0,81	25 x 45	ECS2FBB271M◇◇△△2545
	330	737	406	0,15	0,9	0,85	30 x 40	ECS2FBB271M◇◇△△3040
		737	406	0,15	0,9	0,82	35 x 30	ECS2FBB271M◇◇△△3530
	390	603	332	0,15	1,0	0,92	25 x 50	ECS2FBB331M◇◇△△2550
		603	332	0,15	1,0	0,90	35 x 35	ECS2FBB331M◇◇△△3535
	470	511	281	0,15	1,2	1,04	30 x 45	ECS2FBB391M◇◇△△3045
		511	281	0,15	1,2	1,05	35 x 40	ECS2FBB391M◇◇△△3540
	560	424	233	0,15	1,5	1,15	30 x 50	ECS2FBB471M◇◇△△3050
		424	233	0,15	1,5	1,18	35 x 45	ECS2FBB471M◇◇△△3545
	560	356	196	0,15	1,5	1,34	35 x 50	ECS2FBB561M◇◇△△3550

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 105°C 105Hz	Size øD x L (mm)	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 79
350 (400) 2V	68	2926	1610	0,15	0,2	0,34	22 x 25	ECS2VBB680M◇◇△△2225
		82	2427	1334	0,15	0,3	0,40	22 x 30
	100	1990	1095	0,15	0,4	0,47	25 x 25	ECS2VBB101M◇◇△△2525
		1658	912	0,15	0,4	0,52	22 x 35	ECS2VBB121M◇◇△△2235
	120	1658	912	0,15	0,4	0,53	25 x 30	ECS2VBB121M◇◇△△2530
		1658	912	0,15	0,4	0,53	30 x 25	ECS2VBB121M◇◇△△3025
	150	1327	730	0,15	0,5	0,59	22 x 40	ECS2VBB151M◇◇△△2240
		1327	730	0,15	0,5	0,60	25 x 35	ECS2VBB151M◇◇△△2535

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance (μF)	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz (mΩ)	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz (mΩ)	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current (mA)	I <sub>RAC</sub> Rated Ripple Current 105°C 120Hz (Arms)	Size øD x L (mm)	ORDER CODE	Details: Page 79
<b>400</b> <b>(450)</b> <b>2G</b>	68	2926	1522	0,15	0,3	0,38	22 x 30	ECS2GBB680M◇◇△△2230	
	82	2427	1262	0,15	0,3	0,41	25 x 25	ECS2GBB820M◇◇△△2525	
	100	1990	1035	0,15	0,4	0,46	22 x 35	ECS2GBB101M◇◇△△2235	
		1990	1035	0,15	0,4	0,48	25 x 30	ECS2GBB101M◇◇△△2530	
	120	1658	863	0,15	0,5	0,53	22 x 40	ECS2GBB121M◇◇△△2240	
		1658	863	0,15	0,5	0,55	25 x 35	ECS2GBB121M◇◇△△2535	
		1658	863	0,15	0,5	0,56	30 x 30	ECS2GBB121M◇◇△△3030	
	150	1327	690	0,15	0,6	0,63	22 x 50	ECS2GBB151M◇◇△△2250	
		1327	690	0,15	0,6	0,65	25 x 40	ECS2GBB151M◇◇△△2540	
	180	1106	575	0,15	0,7	0,72	25 x 45	ECS2GBB181M◇◇△△2545	
		1106	575	0,15	0,7	0,74	30 x 35	ECS2GBB181M◇◇△△3035	
	220	905	471	0,15	0,9	0,79	25 x 50	ECS2GBB221M◇◇△△2550	
		905	471	0,15	0,9	0,85	30 x 40	ECS2GBB221M◇◇△△3040	
	270	905	471	0,15	0,9	0,89	35 x 30	ECS2GBB221M◇◇△△3530	
		737	383	0,15	1,1	0,98	30 x 45	ECS2GBB271M◇◇△△3045	
	330	737	383	0,15	1,1	0,96	35 x 35	ECS2GBB271M◇◇△△3535	
		603	314	0,15	1,3	1,12	30 x 50	ECS2GBB331M◇◇△△3050	
	390	603	314	0,15	1,3	1,12	35 x 40	ECS2GBB331M◇◇△△3540	
		511	265	0,15	1,5	1,27	35 x 45	ECS2GBB391M◇◇△△3545	
	470	424	220	0,15	1,5	1,33	35 x 50	ECS2GBB471M◇◇△△3550	


U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance (μF)	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz (mΩ)	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz (mΩ)	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current (mA)	I <sub>RAC</sub> Rated Ripple Current 105°C 120Hz (Arms)	Size øD x L (mm)	ORDER CODE	Details: Page 79
<b>450</b> <b>(500)</b> <b>2W</b>	68	3901	1951	0,20	0,3	0,38	22 x 30	ECS2WBB680M◇◇△△2230	
	82	3235	1618	0,20	0,4	0,44	22 x 35	ECS2WBB820M◇◇△△2235	
		3235	1618	0,20	0,4	0,45	25 x 30	ECS2WBB820M◇◇△△2530	
	100	3235	1618	0,20	0,4	0,46	30 x 25	ECS2WBB820M◇◇△△3025	
		2653	1327	0,20	0,5	0,50	22 x 40	ECS2WBB101M◇◇△△2240	
	120	2653	1327	0,20	0,5	0,52	25 x 35	ECS2WBB101M◇◇△△2535	
		2211	1106	0,20	0,5	0,58	22 x 50	ECS2WBB121M◇◇△△2250	
		2211	1106	0,20	0,5	0,58	25 x 40	ECS2WBB121M◇◇△△2540	
	150	2211	1106	0,20	0,5	0,58	30 x 30	ECS2WBB121M◇◇△△3030	
		1769	884	0,20	0,7	0,66	25 x 45	ECS2WBB151M◇◇△△2545	
	180	1769	884	0,20	0,7	0,68	30 x 35	ECS2WBB151M◇◇△△3035	
		1474	737	0,20	0,8	0,74	25 x 50	ECS2WBB181M◇◇△△2550	
	220	1474	737	0,20	0,8	0,77	30 x 40	ECS2WBB181M◇◇△△3040	
		1474	737	0,20	0,8	0,77	35 x 30	ECS2WBB181M◇◇△△3530	
	270	1206	603	0,20	1,0	0,88	30 x 45	ECS2WBB221M◇◇△△3045	
		1206	603	0,20	1,0	0,88	35 x 35	ECS2WBB221M◇◇△△3535	
	330	983	491	0,20	1,2	0,99	30 x 50	ECS2WBB271M◇◇△△3050	
		983	491	0,20	1,2	1,01	35 x 40	ECS2WBB271M◇◇△△3540	
	390	804	402	0,20	1,5	1,15	35 x 45	ECS2WBB331M◇◇△△3545	
	470	681	340	0,20	1,5	1,28	35 x 50	ECS2WBB391M◇◇△△3550	
	565	282	0,20	1,5	1,50	35 x 55	ECS2WBB471M◇◇△△3555		

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance (μF)	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz (mΩ)	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz (mΩ)	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current (mA)	I <sub>RAC</sub> Rated Ripple Current 105°C 120Hz (Arms)	Size øD x L (mm)	ORDER CODE	Details: Page 79
<b>500</b> <b>(550)</b> <b>2H</b>	47	5644	2823	0,20	0,2	0,41	22 x 30	ECS2HBB470M◇◇△△2230	
	56	4737	2370	0,20	0,3	0,47	22 x 30	ECS2HBB560M◇◇△△2230	
	68	3901	1951	0,20	0,3	0,54	22 x 35	ECS2HBB680M◇◇△△2235	
		3901	1951	0,20	0,3	0,54	25 x 30	ECS2HBB680M◇◇△△2530	
	82	3235	1618	0,20	0,4	0,62	22 x 40	ECS2HBB820M◇◇△△2240	
		3235	1618	0,20	0,4	0,62	25 x 35	ECS2HBB820M◇◇△△2535	
	100	2653	1327	0,20	0,5	0,67	22 x 45	ECS2HBB101M◇◇△△2245	
		2653	1327	0,20	0,5	0,67	25 x 40	ECS2HBB101M◇◇△△2540	
		2653	1327	0,20	0,5	0,67	30 x 30	ECS2HBB101M◇◇△△3030	
	120	2211	1106	0,20	0,6	0,77	22 x 50	ECS2HBB121M◇◇△△2250	
		2211	1106	0,20	0,6	0,74	25 x 40	ECS2HBB121M◇◇△△2540	
		2211	1106	0,20	0,6	0,77	30 x 35	ECS2HBB121M◇◇△△3035	
	150	2211	1106	0,20	0,6	0,80	35 x 30	ECS2HBB121M◇◇△△3530	
		1769	885	0,20	0,8	0,82	25 x 45	ECS2HBB151M◇◇△△2545	
	180	1769	885	0,20	0,8	0,85	30 x 40	ECS2HBB151M◇◇△△3040	
		1769	885	0,20	0,8	0,67	35 x 30	ECS2HBB151M◇◇△△3530	
	220	1769	885	0,20	0,8	0,85	35 x 35	ECS2HBB151M◇◇△△3535	
		1474	737	0,20	0,9	0,98	25 x 50	ECS2HBB181M◇◇△△2550	
	270	1474	737	0,20	0,9	1,01	30 x 45	ECS2HBB181M◇◇△△3045	
		1206	603	0,20	1,1	1,12	30 x 50	ECS2HBB221M◇◇△△3050	
330	1206	603	0,20	1,1	0,94	35 x 35	ECS2HBB221M◇◇△△3535		
	1206	603	0,20	1,1	1,12	35 x 40	ECS2HBB221M◇◇△△3540		
390	983	492	0,20	1,4	1,25	30 x 50	ECS2HBB271M◇◇△△3050		
	983	492	0,20	1,4	1,25	35 x 40	ECS2HBB271M◇◇△△3540		

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance (μF)	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz (mΩ)	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz (mΩ)	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current (mA)	I <sub>RAC</sub> Rated Ripple Current 105°C 120Hz (Arms)	Size øD x L (mm)	ORDER CODE	Details: Page 79
<b>500</b> <b>(550)</b> <b>2H</b>	330	804	402	0,20	1,5	1,36	35 x 45	ECS2HBB331M◇◇△△3545	
	390	681	340	0,20	1,5	1,54	35 x 50	ECS2HBB391M◇◇△△3550	
	470	565	282	0,20	1,5	1,69	35 x 60	ECS2HBB471M◇◇△△3560	
<b>550</b> <b>(600)</b> <b>2Y</b>	150	1769	885	0,20	0,8	0,92	30 x 40	ECS2YBB151M◇◇△△3040	
		1474	737	0,20	1,0	1,03	30 x 50	ECS2YBB181M◇◇△△3050	
	180	1474	737	0,20	1,0	1,03	35 x 35	ECS2YBB181M◇◇△△3535	
		1206	603	0,20	1,2	1,15	30 x 55	ECS2YBB221M◇◇△△3055	
	220	1206	603	0,20	1,2	1,15	35 x 40	ECS2YBB221M◇◇△△3540	
		270	983	492	0,20	1,5	1,30	35 x 45	ECS2YBB271M◇◇△△3545
	330	804	402	0,20	1,5	1,48	35 x 50	ECS2YBB331M◇◇△△3550	
	390	681	340	0,20	1,5	1,65	35 x 60	ECS2YBB391M◇◇△△3560	
	470	565	282	0,20	1,5	1,92	35 x 70	ECS2YBB471M◇◇△△3570	
	560	473	237	0,20	1,5	2,05	35 x 80	ECS2YBB561M◇◇△△3580	
		473	237	0,20	1,5	2,05	40 x 70	ECS2YBB561M◇◇△△4070	

**SNAP-IN**



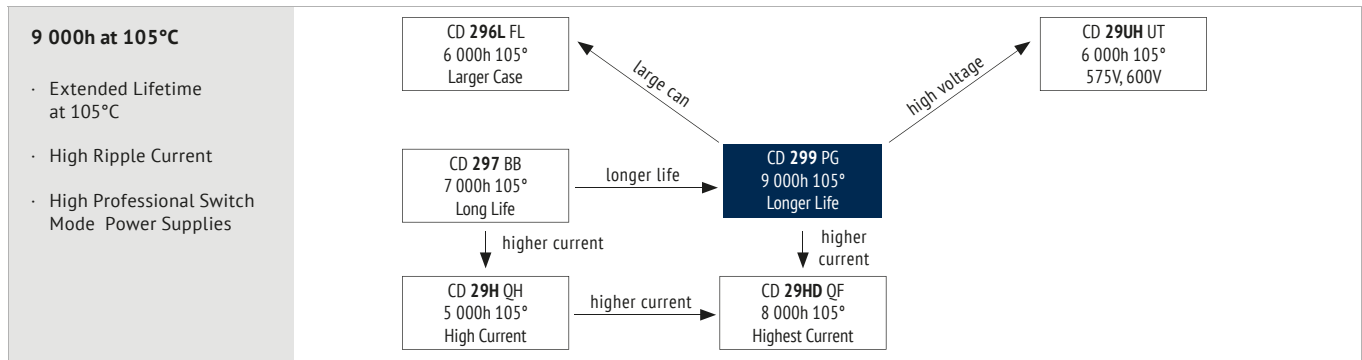

**ITEM CHARACTERISTICS**

Operating Temperature Range (°C)	-40 ~ +105	-25 ~ +105
Voltage Range (V)	160 ~ 250	315 ~ 500
Capacitance Range (µF)	39 ~ 2 200	
Capacitance Tolerance (20°C, 120Hz)	± 20%	

**!** The usage at lower temperatures than indicated may be possible. Please contact the Jianghai Europe sales office for approval.

Leakage Current: After 5 minutes at 20°C application of rated voltage, leakage current is not more than specified in table.

Stability at Low Temperature (Impedance Ratio at 120Hz)	Rated Voltage (V)	≤ 250	315 ~ 500
	Z <sub>-25°C</sub> / Z <sub>+20°C</sub>	3	8
	Z <sub>-40°C</sub> / Z <sub>+20°C</sub>	12	-

Fast Charge-Discharge: **!** Please contact Jianghai for an appropriate choice of the capacitor or possible technical adaptations, esp. for applications like: Welding, Photoflash, Servo motors, X-Ray


ITEM	USEFUL LIFE		LOAD LIFE	ENDURANCE TEST	SHELF LIFE	
Lifetime	9 000h	> 200 000h	7 000h	7 000h	1 000h	
Leakage Current	Not more than specified value		Not more than specified value	Not more than specified value	Not more than specified value	
Capacitance Change	Within ± 30% of initial value		Within ± 20% of initial value	Within ± 20% of initial value	Within ± 20% of initial value	
Dissipation Factor	Not more than 300% of specified value		Not more than 200% of specified value	Not more than 200% of specified value	Not more than 200% of specified value	
Condition: Applied Voltage Applied Current Applied Temperature	U <sub>R</sub> I <sub>R</sub> 105°C	U <sub>R</sub> 1,4 x I <sub>R</sub> 50°C	U <sub>R</sub> I <sub>R</sub> 105°C	U <sub>R</sub> I <sub>R</sub> = 0 105°C IEC 60384	U <sub>R</sub> = 0 I <sub>R</sub> = 0 105°C	After test: U <sub>R</sub> to be applied for 30 min > 24h before measurement

**MULTIPLIER FOR RIPPLE CURRENT (FREQUENCY COEFFICIENT)**

Frequency	50Hz	120Hz	300Hz	1kHz	10kHz	≥ 40 kHz
Rated Voltage (V)						
160 ~ 250	0,80	1,00	1,17	1,30	1,45	1,50
≥ 315	0,80	1,00	1,16	1,30	1,43	1,45

Multipliers for typical operating conditions.

**MULTIPLIER FOR LIFETIME (LIFETIME DIAGRAM)**

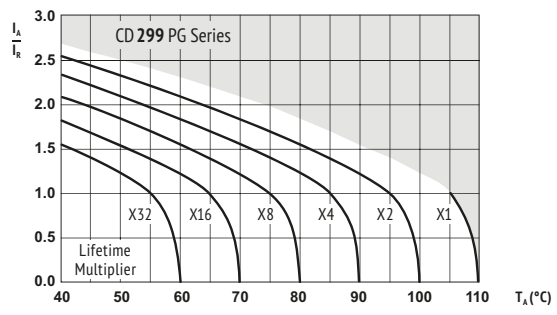

I<sub>A</sub> = actual ripple current at 120Hz, I<sub>R</sub> = rated ripple current at 120Hz, 105°C. Multiplier of Useful Life as a function of ambient temperature & ripple current load

**!** Max. Current Snap-In Terminal: 15A. For more current use Lug-Terminals.

**ENVIRONMENTAL**

The products are RoHS, WEEE and REACH compliant. The detailed version please see separate "Environmental Certificates" document or www.jianghai-europe.com

**! SAFETY FACTOR**

This diagram includes a safety margin. In many cases the allowed current capability/lifetime may be increased. For details and approvals please contact the Jianghai Europe sales office.

SNAP-IN



U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 105°C 120Hz	Size øD x L (mm)	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 79
(V)	(µF)	(mΩ)	(mΩ)		(mA)	(Arms)		
<b>160</b> <b>(200)</b> <b>2C</b>	270	737	516	0,15	0,4	1,10	22 x 25	ECS2CPG271M◇◇△△2225
	330	603	422	0,15	0,5	1,20	22 x 30	ECS2CPG331M◇◇△△2230
	390	511	357	0,15	0,6	1,30	25 x 25	ECS2CPG391M◇◇△△2525
	470	424	296	0,15	0,8	1,40	22 x 35	ECS2CPG471M◇◇△△2235
		424	296	0,15	0,8	1,40	25 x 30	ECS2CPG471M◇◇△△2530
	560	356	249	0,15	0,9	1,50	22 x 40	ECS2CPG561M◇◇△△2240
		356	249	0,15	0,9	1,50	30 x 25	ECS2CPG561M◇◇△△3025
	680	293	205	0,15	1,1	1,70	22 x 45	ECS2CPG681M◇◇△△2245
		293	205	0,15	1,1	1,70	25 x 35	ECS2CPG681M◇◇△△2535
	820	243	170	0,15	1,3	2,00	25 x 40	ECS2CPG821M◇◇△△2540
		199	139	0,15	1,5	2,20	25 x 45	ECS2CPG102M◇◇△△2545
	1 000	199	139	0,15	1,5	2,20	30 x 35	ECS2CPG102M◇◇△△3035
		166	116	0,15	1,5	2,30	25 x 50	ECS2CPG122M◇◇△△2550
	1 200	166	116	0,15	1,5	2,30	30 x 40	ECS2CPG122M◇◇△△3040
		166	116	0,15	1,5	2,30	35 x 35	ECS2CPG122M◇◇△△3535
	1 500	133	93	0,15	1,5	2,50	30 x 45	ECS2CPG152M◇◇△△3045
		133	93	0,15	1,5	2,50	35 x 40	ECS2CPG152M◇◇△△3540
	1 800	111	77	0,15	1,5	2,70	30 x 50	ECS2CPG182M◇◇△△3050
		111	77	0,15	1,5	2,70	35 x 45	ECS2CPG182M◇◇△△3545
	2 200	91	63	0,15	1,5	2,90	35 x 50	ECS2CPG222M◇◇△△3550

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 105°C 120Hz	Size øD x L (mm)	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 79
(V)	(µF)	(mΩ)	(mΩ)		(mA)	(Arms)		
<b>200</b> <b>(250)</b> <b>2D</b>	220	905	633	0,15	0,4	1,00	22 x 25	ECS2DPG221M◇◇△△2225
	270	737	516	0,15	0,5	1,10	22 x 30	ECS2DPG271M◇◇△△2230
		737	516	0,15	0,5	1,10	25 x 25	ECS2DPG271M◇◇△△2525
	390	511	357	0,15	0,8	1,30	22 x 35	ECS2DPG391M◇◇△△2235
		511	357	0,15	0,8	1,30	25 x 30	ECS2DPG391M◇◇△△2530
	470	424	296	0,15	0,9	1,40	22 x 40	ECS2DPG471M◇◇△△2240
		424	296	0,15	0,9	1,40	25 x 35	ECS2DPG471M◇◇△△2535
	560	424	296	0,15	0,9	1,40	30 x 30	ECS2DPG471M◇◇△△3030
		356	249	0,15	1,1	1,50	22 x 45	ECS2DPG561M◇◇△△2245
	680	293	205	0,15	1,4	1,70	25 x 40	ECS2DPG681M◇◇△△2540
		293	205	0,15	1,4	1,70	30 x 35	ECS2DPG681M◇◇△△3035
	820	243	170	0,15	1,5	2,00	25 x 50	ECS2DPG821M◇◇△△2550
		243	170	0,15	1,5	2,00	30 x 40	ECS2DPG821M◇◇△△3040
	1 000	243	170	0,15	1,5	2,00	35 x 30	ECS2DPG821M◇◇△△3530
		199	139	0,15	1,5	2,20	30 x 45	ECS2DPG102M◇◇△△3045
	1 200	199	139	0,15	1,5	2,20	35 x 35	ECS2DPG102M◇◇△△3535
		166	116	0,15	1,5	2,30	30 x 50	ECS2DPG122M◇◇△△3050
	1 500	166	116	0,15	1,5	2,30	35 x 40	ECS2DPG122M◇◇△△3540
		133	93	0,15	1,5	2,50	35 x 50	ECS2DPG152M◇◇△△3550

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 105°C 120Hz	Size øD x L (mm)	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 79
(V)	(µF)	(mΩ)	(mΩ)		(mA)	(Arms)		
<b>250</b> <b>(300)</b> <b>2E</b>	180	1106	774	0,15	0,5	0,90	22 x 30	ECS2EPG181M◇◇△△2230
	220	905	633	0,15	0,6	1,00	25 x 25	ECS2EPG221M◇◇△△2525
		737	516	0,15	0,7	1,10	22 x 35	ECS2EPG271M◇◇△△2235
	270	737	516	0,15	0,7	1,10	25 x 30	ECS2EPG271M◇◇△△2530
		737	516	0,15	0,7	1,10	30 x 25	ECS2EPG271M◇◇△△3025
	330	603	422	0,15	0,8	1,20	22 x 40	ECS2EPG331M◇◇△△2240
		603	422	0,15	0,8	1,20	25 x 35	ECS2EPG331M◇◇△△2535
	390	511	357	0,15	1,0	1,30	22 x 45	ECS2EPG391M◇◇△△2245
		511	357	0,15	1,0	1,30	25 x 40	ECS2EPG391M◇◇△△2540
	470	511	357	0,15	1,0	1,30	30 x 30	ECS2EPG391M◇◇△△3030
		424	296	0,15	1,2	1,40	25 x 45	ECS2EPG471M◇◇△△2545
	560	424	296	0,15	1,2	1,40	30 x 35	ECS2EPG471M◇◇△△3035
		424	296	0,15	1,2	1,40	35 x 30	ECS2EPG471M◇◇△△3530
	680	356	249	0,15	1,4	1,50	25 x 50	ECS2EPG561M◇◇△△2550
		293	205	0,15	1,5	1,70	30 x 45	ECS2EPG681M◇◇△△3045
	820	293	205	0,15	1,5	1,70	35 x 35	ECS2EPG681M◇◇△△3535
		243	170	0,15	1,5	2,00	30 x 50	ECS2EPG821M◇◇△△3050
	1 000	243	170	0,15	1,5	2,00	35 x 40	ECS2EPG821M◇◇△△3540
	1 200	199	139	0,15	1,5	2,20	35 x 45	ECS2EPG102M◇◇△△3545
	1 500	166	116	0,15	1,5	2,30	35 x 50	ECS2EPG122M◇◇△△3550

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 105°C 120Hz	Size øD x L (mm)	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 79
(V)	(µF)	(mΩ)	(mΩ)		(mA)	(Arms)		
<b>315</b> <b>(365)</b> <b>2F</b>	82	2427	1335	0,15	0,3	0,64	22 x 25	ECS2FPG820M◇◇△△2225
	100	1990	1095	0,15	0,3	0,69	22 x 30	ECS2FPG101M◇◇△△2230
		1658	912	0,15	0,4	0,75	25 x 25	ECS2FPG121M◇◇△△2525
	150	1327	730	0,15	0,5	0,82	22 x 35	ECS2FPG151M◇◇△△2235
		1327	730	0,15	0,5	0,82	25 x 30	ECS2FPG151M◇◇△△2530
	180	1327	730	0,15	0,5	0,82	30 x 25	ECS2FPG151M◇◇△△3025
		1106	608	0,15	0,6	0,90	22 x 40	ECS2FPG181M◇◇△△2240
	220	1106	608	0,15	0,6	0,90	25 x 35	ECS2FPG181M◇◇△△2535
		905	498	0,15	0,7	1,00	22 x 45	ECS2FPG221M◇◇△△2245
	270	905	498	0,15	0,7	1,00	25 x 40	ECS2FPG221M◇◇△△2540
		905	498	0,15	0,7	1,00	30 x 30	ECS2FPG221M◇◇△△3030
	330	737	406	0,15	0,9	1,10	25 x 45	ECS2FPG271M◇◇△△2545
		737	406	0,15	0,9	1,10	30 x 35	ECS2FPG271M◇◇△△3035
	390	737	406	0,15	0,9	1,10	35 x 30	ECS2FPG271M◇◇△△3530
		603	332	0,15	1,0	1,20	25 x 50	ECS2FPG331M◇◇△△2550
	470	603	332	0,15	1,0	1,20	30 x 40	ECS2FPG331M◇◇△△3040
		511	281	0,15	1,2	1,30	30 x 45	ECS2FPG391M◇◇△△3045
	560	511	281	0,15	1,2	1,30	35 x 35	ECS2FPG391M◇◇△△3535
		424	233	0,15	1,5	1,40	30 x 50	ECS2FPG471M◇◇△△3050
	680	424	233	0,15	1,5	1,40	35 x 40	ECS2FPG471M◇◇△△3540
356		196	0,15	1,5	1,50	35 x 45	ECS2FPG561M◇◇△△3545	
	293	161	0,15	1,5	1,70	35 x 50	ECS2FPG681M◇◇△△3550	

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 105°C 120Hz	Size øD x L (mm)	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 79
(V)	(µF)	(mΩ)	(mΩ)		(mA)	(Arms)		
<b>350</b> <b>(400)</b> <b>2V</b>	82	2427	1335	0,15	0,3	0,64	22 x 25	ECS2VPG820M◇◇△△2225
	100	1990	1095	0,15	0,4	0,69	22 x 30	ECS2VPG101M◇◇△△2230
		1658	912	0,15	0,4	0,75	25 x 25	ECS2VPG101M◇◇△△2525
	120	1658	912	0,15	0,4	0,75	22 x 35	ECS2VPG121M◇◇△△2235
		1658	912	0,15	0,4	0,75	25 x 30	ECS2VPG121M◇◇△△2530
	150	1327	730	0,15	0,5	0,82	22 x 40	ECS2VPG151M◇◇△△2240
		1327	730	0,15	0,5	0,82	30 x 25	ECS2VPG151M◇◇△△3025
	180	1106	608	0,15	0,6	0,90	22 x 45	ECS2VPG181M◇◇△△2245
		1106	608	0,15	0,6	0,90	25 x 35	ECS2VPG181M◇◇△△2535
	220	1106	608	0,15	0,6	0,90	30 x 30	ECS2VPG181M◇◇△△3030
		905	498	0,15	0,8	1,00	22 x 50	ECS2VPG221M◇◇△△2250
	270	905	498	0,15	0,8	1,00	25 x 40	ECS2VPG221M◇◇△△2540
		737	406	0,15	0,9	1,10	25 x 50	ECS2VPG271M◇◇△△2550
	330	737	406	0,15	0,9	1,10	30 x 35	ECS2VPG271M◇◇△△3035
		737	406	0,15	0,9	1,10	35 x 30	ECS2VPG271M◇◇△△3530
	390	603	332	0,15	1,2	1,20	30 x 45	ECS2VPG331M◇◇△△3045
		603	332	0,15	1,2	1,20	35 x 35	ECS2VPG331M◇◇△△3535
	470	511	281	0,15	1,4	1,30	30 x 50	ECS2VPG391M◇◇△△3050
		511	281	0,15	1,4	1,30	35 x 40	ECS2VPG391M◇◇△△3540
	560	356	196	0,15	1,5	1,50	35 x 50	ECS2VPG561M◇◇△△3550


U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 105°C 120Hz	Size øD x L (mm)	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 79
(V)	(µF)	(mΩ)	(mΩ)		(mA)	(Arms)		
<b>400</b> <b>(450)</b> <b>2G</b>	56	3553	1955	0,15	0,2	0,51	22 x 25	ECS2GPG560M◇◇△△2225
	68	2926	1610	0,15	0,3	0,56	22 x 30	ECS2GPG680M◇◇△△2230
		2926	1610	0,15	0,3	0,56	25 x 25	ECS2GPG680M◇◇△△2525
	82	2427	1335	0,15	0,3	0,64	22 x 35	

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub>	ESR <sub>typ</sub>	tanδ	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current	Size øD x L	ORDER CODE
		Equivalent Series Resistance 20°C 120Hz	Equivalent Series Resistance 20°C 120Hz					
(V)	(µF)	(mΩ)	(mΩ)		(mA)	(Arms)	(mm)	Details: Page 79
450 (500) 2W	39	6802	3062	0,20	0,2	0,37	22 x 25	ECS2WPG390M $\diamond\diamond\Delta\Delta$ 2225
	47	5644	2541	0,20	0,2	0,40	22 x 30	ECS2WPG470M $\diamond\diamond\Delta\Delta$ 2230
	56	4737	2133	0,20	0,3	0,47	22 x 35	ECS2WPG560M $\diamond\diamond\Delta\Delta$ 2235
		4737	2133	0,20	0,3	0,47	25 x 25	ECS2WPG560M $\diamond\diamond\Delta\Delta$ 2525
	68	3901	1756	0,20	0,3	0,53	22 x 40	ECS2WPG680M $\diamond\diamond\Delta\Delta$ 2240
		3901	1756	0,20	0,3	0,53	25 x 30	ECS2WPG680M $\diamond\diamond\Delta\Delta$ 2530
	82	3235	1456	0,20	0,4	0,56	22 x 45	ECS2WPG820M $\diamond\diamond\Delta\Delta$ 2245
		3235	1456	0,20	0,4	0,56	25 x 35	ECS2WPG820M $\diamond\diamond\Delta\Delta$ 2535
		3235	1456	0,20	0,4	0,56	30 x 25	ECS2WPG820M $\diamond\diamond\Delta\Delta$ 3025
	100	2653	1194	0,20	0,5	0,64	22 x 50	ECS2WPG101M $\diamond\diamond\Delta\Delta$ 2250
		2653	1194	0,20	0,5	0,64	25 x 40	ECS2WPG101M $\diamond\diamond\Delta\Delta$ 2540
		2653	1194	0,20	0,5	0,64	30 x 30	ECS2WPG101M $\diamond\diamond\Delta\Delta$ 3030
	120	2211	995	0,20	0,5	0,72	25 x 45	ECS2WPG121M $\diamond\diamond\Delta\Delta$ 2545
		1769	796	0,20	0,7	0,79	25 x 50	ECS2WPG151M $\diamond\diamond\Delta\Delta$ 2550
	150	1769	796	0,20	0,7	0,79	30 x 40	ECS2WPG151M $\diamond\diamond\Delta\Delta$ 3040
		1769	796	0,20	0,7	0,79	35 x 30	ECS2WPG151M $\diamond\diamond\Delta\Delta$ 3530
	180	1474	664	0,20	0,8	0,87	30 x 45	ECS2WPG181M $\diamond\diamond\Delta\Delta$ 3045
		1474	664	0,20	0,8	0,87	35 x 35	ECS2WPG181M $\diamond\diamond\Delta\Delta$ 3535
	220	1206	543	0,20	1,0	1,00	30 x 50	ECS2WPG221M $\diamond\diamond\Delta\Delta$ 3050
		1206	543	0,20	1,0	1,00	35 x 40	ECS2WPG221M $\diamond\diamond\Delta\Delta$ 3540
270	983	442	0,20	1,2	1,19	35 x 45	ECS2WPG271M $\diamond\diamond\Delta\Delta$ 3545	
330	804	362	0,20	1,5	1,38	35 x 50	ECS2WPG331M $\diamond\diamond\Delta\Delta$ 3550	

500 (550) 2H	47	5644	2823	0,20	0,2	0,41	22 x 30	ECS2HPG470M $\diamond\diamond\Delta\Delta$ 2230
	56	4737	2370	0,20	0,3	0,47	22 x 30	ECS2HPG560M $\diamond\diamond\Delta\Delta$ 2230
	68	3901	1951	0,20	0,3	0,54	22 x 35	ECS2HPG680M $\diamond\diamond\Delta\Delta$ 2235
		3901	1951	0,20	0,3	0,54	25 x 30	ECS2HPG680M $\diamond\diamond\Delta\Delta$ 2530
	82	3235	1618	0,20	0,4	0,62	22 x 40	ECS2HPG820M $\diamond\diamond\Delta\Delta$ 2240
		3235	1618	0,20	0,4	0,62	25 x 35	ECS2HPG820M $\diamond\diamond\Delta\Delta$ 2535
	100	2653	1327	0,20	0,5	0,67	22 x 45	ECS2HPG101M $\diamond\diamond\Delta\Delta$ 2245
		2653	1327	0,20	0,5	0,67	25 x 40	ECS2HPG101M $\diamond\diamond\Delta\Delta$ 2540
		2653	1327	0,20	0,5	0,67	30 x 30	ECS2HPG101M $\diamond\diamond\Delta\Delta$ 3030
	120	2211	1106	0,20	0,6	0,77	22 x 50	ECS2HPG121M $\diamond\diamond\Delta\Delta$ 2250
		2211	1106	0,20	0,6	0,74	25 x 40	ECS2HPG121M $\diamond\diamond\Delta\Delta$ 2540
		2211	1106	0,20	0,6	0,77	30 x 35	ECS2HPG121M $\diamond\diamond\Delta\Delta$ 3035
		2211	1106	0,20	0,6	0,80	35 x 30	ECS2HPG121M $\diamond\diamond\Delta\Delta$ 3530
	150	1769	885	0,20	0,8	0,82	25 x 45	ECS2HPG151M $\diamond\diamond\Delta\Delta$ 2545
		1769	885	0,20	0,8	0,85	30 x 40	ECS2HPG151M $\diamond\diamond\Delta\Delta$ 3040
		1769	885	0,20	0,8	0,85	35 x 35	ECS2HPG151M $\diamond\diamond\Delta\Delta$ 3535
	180	1474	737	0,20	0,9	0,98	25 x 50	ECS2HPG181M $\diamond\diamond\Delta\Delta$ 2550
		1474	737	0,20	0,9	1,01	30 x 45	ECS2HPG181M $\diamond\diamond\Delta\Delta$ 3045
	220	1206	603	0,20	1,1	1,12	30 x 50	ECS2HPG221M $\diamond\diamond\Delta\Delta$ 3050
		1206	603	0,20	1,1	1,12	35 x 40	ECS2HPG221M $\diamond\diamond\Delta\Delta$ 3540
270	983	492	0,20	1,4	1,25	30 x 50	ECS2HPG271M $\diamond\diamond\Delta\Delta$ 3050	
	983	492	0,20	1,4	1,25	35 x 45	ECS2HPG271M $\diamond\diamond\Delta\Delta$ 3545	
330	804	402	0,20	1,5	1,36	35 x 50	ECS2HPG331M $\diamond\diamond\Delta\Delta$ 3550	

SNAP-IN

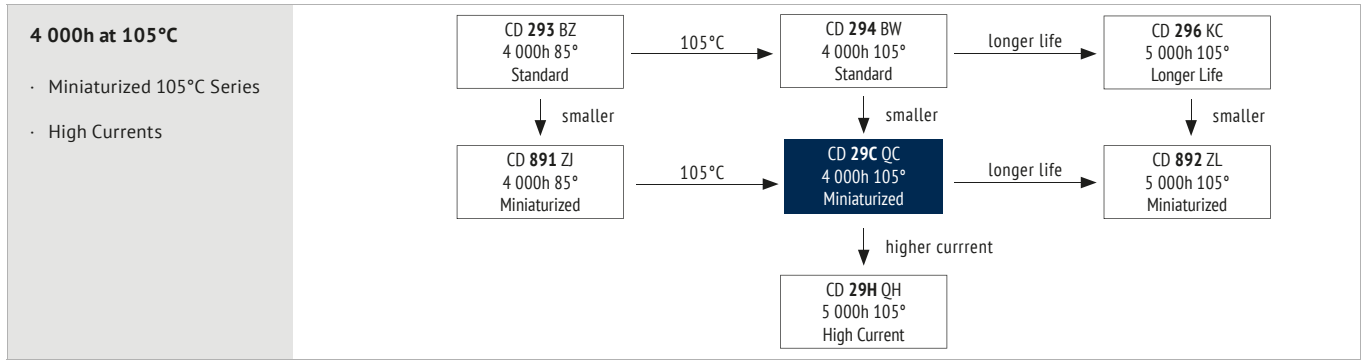


**ITEM CHARACTERISTICS**

Operating Temperature Range (°C)	-40 ~ +105	-25 ~ +105
Voltage Range (V)	200 ~ 250	400 ~ 450
Capacitance Range (µF)	100 ~ 2 700	
Capacitance Tolerance (20°C, 120Hz)	± 20%	

**!** The usage at lower temperatures than indicated may be possible. Please contact the Jianghai Europe sales office for approval.

Leakage Current: After 5 minutes at 20°C application of rated voltage, leakage current is not more than specified in table.

Stability at Low Temperature (Impedance Ratio at 120Hz)	Rated Voltage (V)	200	250	400	450
	Impedance Ratio	$Z_{-25°C} / Z_{+20°C}$	4		8
	$Z_{-40°C} / Z_{+20°C}$	12		-	


Fast Charge-Discharge: **!** Please contact Jianghai for an appropriate choice of the capacitor or possible technical adaptations, esp. for applications like: Welding, Photoflash, Servo motors, X-Ray

ITEM	USEFUL LIFE		LOAD LIFE	ENDURANCE TEST	SHELF LIFE	
Lifetime	4 000h	> 180 000h	2 000h	3 000h	1 000h	
Leakage Current	Not more than specified value		Not more than specified value	Not more than specified value	Not more than specified value	
Capacitance Change	Within ± 30% of initial value		Within ± 20% of initial value	Within ± 20% of initial value	Within ± 20% of initial value	
Dissipation Factor	Not more than 300% of specified value		Not more than 200% of specified value	Not more than 200% of specified value	Not more than 200% of specified value	
Condition:						
Applied Voltage	$U_R$	$U_R$	$U_R$	$U_R$	$U_R = 0$	After test: $U_R$ to be applied for 30 min > 24h before measurement
Applied Current	$I_R$	$1,4 \times I_R$	$I_R$	$I_R = 0$	$I_R = 0$	
Applied Temperature	105°C	40°C	105°C	105°C IEC 60384	105°C	

**MULTIPLIER FOR RIPPLE CURRENT (FREQUENCY COEFFICIENT)**

Frequency	Rated Voltage (V)					
	50Hz	120Hz	300Hz	1kHz	10kHz	≥ 50 kHz
200 ~ 250	0,80	1,00	1,17	1,32	1,45	1,50
400 ~ 450	0,80	1,00	1,16	1,30	1,41	1,43

Multipliers for typical operating conditions.

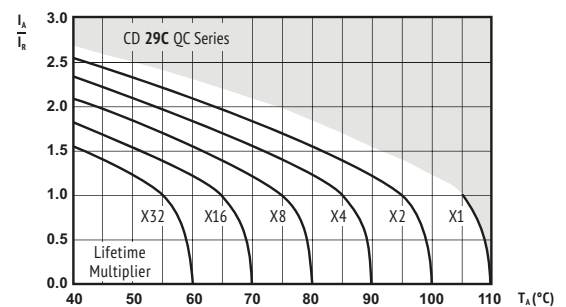**MULTIPLIER FOR LIFETIME (LIFETIME DIAGRAM)**


$I_A$  = actual ripple current at 120Hz,  
 $I_R$  = rated ripple current at 120Hz, 105°C  
 Multiplier of Useful Life as a function of ambient temperature & ripple current load

**!** Max. Current Snap-In Terminal: 15A. For more current use Lug-Terminals.

**ENVIRONMENTAL**

The products are RoHS, WEEE and REACH compliant. The detailed version please see separate "Environmental Certificates" document or [www.jianghai-europe.com](http://www.jianghai-europe.com)

**! SAFETY FACTOR**

This diagram includes a safety margin. In many cases the allowed current capability/lifetime may be increased. For details and approvals please contact the Jianghai Europe sales office.

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 105°C 120Hz	Size øD x L (mm)	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 79
200 (250) 2D	330	603	422	0,15	0,7	1,01	22 x 25	ECS2DQC331M◇◇△△2225
	390	511	357	0,15	0,8	1,10	22 x 30	ECS2DQC391M◇◇△△2230
		424	296	0,15	0,9	1,20	22 x 30	ECS2DQC471M◇◇△△2230
	470	424	296	0,15	0,9	1,20	25 x 25	ECS2DQC471M◇◇△△2525
		356	248	0,15	1,1	1,48	22 x 35	ECS2DQC561M◇◇△△2235
	560	355	248	0,15	1,1	1,48	25 x 30	ECS2DQC561M◇◇△△2530
		293	204	0,15	1,4	1,62	22 x 40	ECS2DQC681M◇◇△△2240
	680	293	204	0,15	1,4	1,60	25 x 30	ECS2DQC681M◇◇△△2530
		293	204	0,15	1,4	1,60	30 x 25	ECS2DQC681M◇◇△△3025
	820	243	169	0,15	1,5	1,75	22 x 45	ECS2DQC821M◇◇△△2245
		243	169	0,15	1,5	1,75	25 x 35	ECS2DQC821M◇◇△△2535
	1 000	243	169	0,15	1,5	1,75	30 x 30	ECS2DQC821M◇◇△△3030
		199	139	0,15	1,5	2,04	22 x 50	ECS2DQC102M◇◇△△2250
	1 200	199	139	0,15	1,5	2,04	25 x 40	ECS2DQC102M◇◇△△2540
		199	139	0,15	1,5	2,04	30 x 35	ECS2DQC102M◇◇△△3035
	1 500	199	139	0,15	1,5	2,04	35 x 25	ECS2DQC102M◇◇△△3525
		166	116	0,15	1,5	2,30	25 x 45	ECS2DQC122M◇◇△△2545
	1 800	166	116	0,15	1,5	2,30	30 x 35	ECS2DQC122M◇◇△△3035
		133	92	0,15	1,5	2,57	30 x 40	ECS2DQC152M◇◇△△3040
	2 200	133	92	0,15	1,5	2,57	35 x 30	ECS2DQC152M◇◇△△3530
		111	77	0,15	1,5	2,68	30 x 50	ECS2DQC182M◇◇△△3050
	2 700	111	77	0,15	1,5	2,68	35 x 35	ECS2DQC182M◇◇△△3535
		91	63	0,15	1,5	2,92	35 x 45	ECS2DQC222M◇◇△△3545
		74	51	0,15	1,5	3,30	35 x 50	ECS2DQC272M◇◇△△3550

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 105°C 120Hz	Size øD x L (mm)	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 79
250 (300) 2E	220	905	633	0,15	0,6	0,95	22 x 25	ECS2EQC221M◇◇△△2225
	270	737	516	0,15	0,7	1,12	22 x 25	ECS2EQC271M◇◇△△2225
		603	422	0,15	0,8	1,21	22 x 30	ECS2EQC331M◇◇△△2230
	330	603	422	0,15	0,8	1,21	25 x 25	ECS2EQC331M◇◇△△2525
		511	357	0,15	1,0	1,38	22 x 35	ECS2EQC391M◇◇△△2235
	390	511	357	0,15	1,0	1,38	25 x 25	ECS2EQC391M◇◇△△2525
		424	296	0,15	1,2	1,56	22 x 40	ECS2EQC471M◇◇△△2240
	470	424	296	0,15	1,2	1,56	25 x 30	ECS2EQC471M◇◇△△2530
		356	248	0,15	1,4	1,74	22 x 45	ECS2EQC561M◇◇△△2245
	560	356	248	0,15	1,4	1,74	25 x 35	ECS2EQC561M◇◇△△2535
		293	204	0,15	1,5	1,92	22 x 50	ECS2EQC681M◇◇△△2250
	680	293	204	0,15	1,5	1,92	25 x 40	ECS2EQC681M◇◇△△2540
		293	204	0,15	1,5	1,92	30 x 30	ECS2EQC681M◇◇△△3030
	820	243	169	0,15	1,5	2,13	25 x 45	ECS2EQC821M◇◇△△2545
		243	169	0,15	1,5	2,13	30 x 35	ECS2EQC821M◇◇△△3035
	1 000	199	139	0,15	1,5	2,40	25 x 50	ECS2EQC102M◇◇△△2550
		199	139	0,15	1,5	2,40	30 x 40	ECS2EQC102M◇◇△△3040
	1 200	199	139	0,15	1,5	2,40	35 x 30	ECS2EQC102M◇◇△△3530
		166	139	0,15	1,5	2,55	30 x 40	ECS2EQC122M◇◇△△3040
	1 500	133	92	0,15	1,5	2,73	30 x 50	ECS2EQC152M◇◇△△3050
		133	92	0,15	1,5	2,73	35 x 40	ECS2EQC152M◇◇△△3540
	1 800	111	77	0,15	1,5	2,82	35 x 45	ECS2EQC182M◇◇△△3545
		91	63	0,15	1,5	2,95	35 x 50	ECS2EQC222M◇◇△△3550


U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 105°C 120Hz	Size øD x L (mm)	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 79
400 (450) 2G	120	1658	1161	0,15	0,5	0,65	22 x 25	ECS2GQC121M◇◇△△2225
	150	1327	930	0,15	0,6	0,73	22 x 30	ECS2GQC151M◇◇△△2230
		1106	774	0,15	0,7	0,73	25 x 25	ECS2GQC181M◇◇△△2525
	220	905	633	0,15	0,9	0,82	22 x 35	ECS2GQC221M◇◇△△2235
		905	633	0,15	0,9	0,87	25 x 30	ECS2GQC221M◇◇△△2530
	270	737	516	0,15	1,1	0,93	22 x 40	ECS2GQC271M◇◇△△2240
		737	516	0,15	1,1	1,05	25 x 35	ECS2GQC271M◇◇△△2535
	330	737	516	0,15	1,1	1,02	30 x 25	ECS2GQC271M◇◇△△3025
		603	422	0,15	1,3	1,16	22 x 50	ECS2GQC331M◇◇△△2250
	390	603	422	0,15	1,3	1,14	25 x 40	ECS2GQC331M◇◇△△2540
		603	422	0,15	1,3	1,14	30 x 30	ECS2GQC331M◇◇△△3030
	470	603	422	0,15	1,3	1,13	35 x 25	ECS2GQC331M◇◇△△3525
		511	357	0,15	1,5	1,45	25 x 45	ECS2GQC391M◇◇△△2545
	560	511	357	0,15	1,5	1,47	30 x 35	ECS2GQC391M◇◇△△3035
		511	357	0,15	1,5	1,50	35 x 30	ECS2GQC391M◇◇△△3530
	680	424	296	0,15	1,5	1,54	25 x 50	ECS2GQC471M◇◇△△2550
		424	296	0,15	1,5	1,61	30 x 40	ECS2GQC471M◇◇△△3040
		424	296	0,15	1,5	1,50	35 x 30	ECS2GQC471M◇◇△△3530

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 105°C 120Hz	Size øD x L (mm)	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 79
400 (450) 2G	560	356	248	0,15	1,5	1,70	30 x 45	ECS2GQC561M◇◇△△3045
		356	248	0,15	1,5	1,67	35 x 35	ECS2GQC561M◇◇△△3535
	680	293	204	0,15	1,5	1,82	30 x 50	ECS2GQC681M◇◇△△3050
		293	204	0,15	1,5	1,87	35 x 40	ECS2GQC681M◇◇△△3540
	820	243	169	0,15	1,5	2,08	35 x 45	ECS2GQC821M◇◇△△3545
		243	169	0,15	1,5	2,14	35 x 50	ECS2GQC821M◇◇△△3550

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 105°C 120Hz	Size øD x L (mm)	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 79
450 (500) 2W	100	2653	1393	0,20	0,5	0,67	22 x 25	ECS2WQC101M◇◇△△2225
	120	2211	1161	0,20	0,5	0,71	22 x 30	ECS2WQC121M◇◇△△2230
		2211	1161	0,20	0,5	0,72	25 x 25	ECS2WQC121M◇◇△△2525
	150	1769	928	0,20	0,7	0,75	22 x 30	ECS2WQC151M◇◇△△2230
		1769	928	0,20	0,7	0,77	22 x 45	ECS2WQC151M◇◇△△2245
	180	1474	774	0,20	0,8	0,79	22 x 40	ECS2WQC181M◇◇△△2240
		1474	774	0,20	0,8	0,79	25 x 30	ECS2WQC181M◇◇△△2530
	220	1206	633	0,20	1,0	0,85	22 x 45	ECS2WQC221M◇◇△△2245
		1206	633	0,20	1,0	0,87	25 x 35	ECS2WQC221M◇◇△△2535
	270	1206	633	0,20	1,0	0,89	30 x 30	ECS2WQC221M◇◇△△3030
		983	516	0,20	1,2	1,00	22 x 50	ECS2WQC271M◇◇△△2250
	330	983	516	0,20	1,2	1,10	25 x 40	ECS2WQC271M◇◇△△2540
		983	516	0,20	1,2	1,01	30 x 30	ECS2WQC271M◇◇△△3030
	390	983	516	0,20	1,2	1,00	35 x 25	ECS2WQC271M◇◇△△3525
		804	422	0,20	1,5	1,28	25 x 50	ECS2WQC331M◇◇△△2550
	470	804	422	0,20	1,5	1,31	30 x 35	ECS2WQC331M◇◇△△3035
		804	422	0,20	1,5	1,25	35 x 30	ECS2WQC331M◇◇△△3530
	560	681	357	0,20	1,5	1,41	30 x 40	ECS2WQC391M◇◇△△3040
		681	357	0,20	1,5	1,45	35 x 35	ECS2WQC391M◇◇△△3535
	680	565	296	0,20	1,5	1,52	30 x 45	ECS2WQC471M◇◇△△3045
		565	296	0,20	1,5	1,61	35 x 40	ECS2WQC471M◇◇△△3540
		474	248	0,20	1,5	1,75	35 x 45	ECS2WQC561M◇◇△△3545
		391	204	0,20	1,5	1,93	35 x 50	ECS2WQC681M◇◇△△3550

SNAP-IN

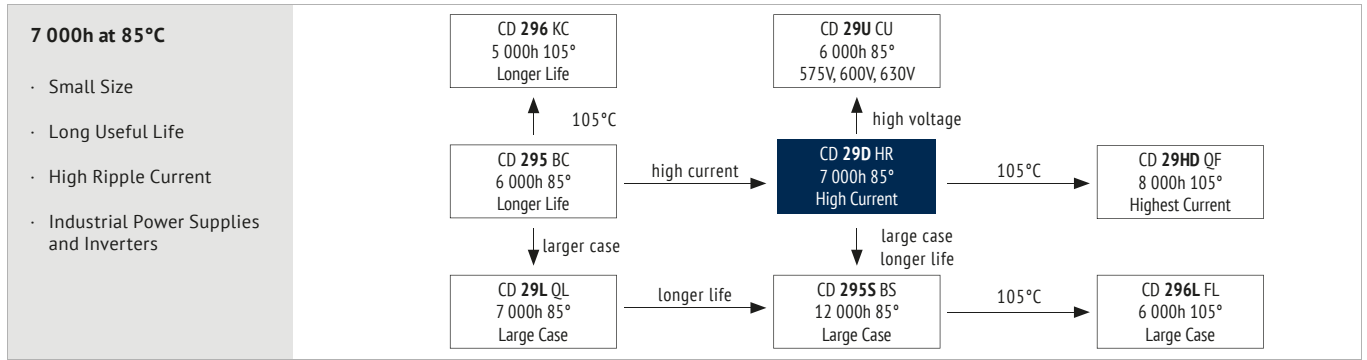


**ITEM CHARACTERISTICS**

Operating Temperature Range (°C)	-40 ~ +85
Voltage Range (V)	160 ~ 450
Capacitance Range (µF)	47 ~ 2 200
Capacitance Tolerance (20°C, 120Hz)	± 20%

**!** The usage at lower temperatures than indicated may be possible. Please contact the Jianghai Europe sales office for approval.

Leakage Current: After 5 minutes at 20°C application of rated voltage, leakage current is not more than specified in table.

Stability at Low Temperature (Impedance Ratio at 120Hz)	Rated Voltage (V)	160 ~ 450
	$Z_{-40°C} / Z_{+20°C}$	4


Fast Charge-Discharge: **!** Please contact Jianghai for an appropriate choice of the capacitor or possible technical adaptations, esp. for applications like: Welding, Photoflash, Servo motors, X-Ray

ITEM	USEFUL LIFE		LOAD LIFE	ENDURANCE TEST	SHELF LIFE	
Lifetime	7 000h	> 100 000h	5 000h	5 000h	1 000h	
Leakage Current	Not more than specified value		Not more than specified value	Not more than specified value	Not more than specified value	
Capacitance Change	Within ± 30% of initial value		Within ± 20% of initial value	Within ± 20% of initial value	Within ± 20% of initial value	
Dissipation Factor	Not more than 300% of specified value		Not more than 200% of specified value	Not more than 200% of specified value	Not more than 200% of specified value	
Condition: Applied Voltage Applied Current Applied Temperature	$U_R$ $I_R$ 85°C	$U_R$ $1,2 \times I_R$ 40°C	$U_R$ $I_R$ 85°C	$U_R$ $I_R = 0$ 85°C IEC 60384	$U_R = 0$ $I_R = 0$ 85°C	After test: $U_R$ to be applied for 30 min > 24h before measurement

**MULTIPLIER FOR RIPPLE CURRENT (FREQUENCY COEFFICIENT)**

Frequency	50Hz	120Hz	300Hz	1kHz	10kHz	≥ 50 kHz
<b>Coefficient</b>	0,80	1,00	1,16	1,30	1,41	1,43

Multipliers for typical operating conditions.

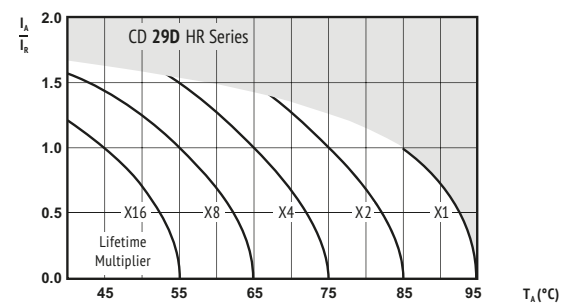**MULTIPLIER FOR LIFETIME (LIFETIME DIAGRAM)**


$I_A$  = actual ripple current at 120Hz,  
 $I_R$  = rated ripple current at 120Hz, 85°C  
 Multiplier of Useful Life as a function of ambient temperature & ripple current load

**!** Max. Current Snap-In Terminal: 15A. For more current use Lug-Terminals.

**ENVIRONMENTAL**

The products are RoHS, WEEE and RECh compliant. The detailed version please see separate "Environmental Certificates" document or [www.jianghai-europe.com](http://www.jianghai-europe.com)

**! SAFETY FACTOR**

This diagram includes a safety margin. In many cases the allowed current capability/lifetime may be increased. For details and approvals please contact the Jianghai Europe sales office.

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 85°C 120Hz	Size øD x L	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 79
(V)	(µF)	(mΩ)	(mΩ)		(mA)	(Arms)	(mm)	
160 (200) 2C	330	603	355	0,15	0,5	1,50	22 x 25	ECS2CHR331M◇◇△△2225
	390	511	300	0,15	0,6	1,60	25 x 25	ECS2CHR391M◇◇△△2525
	470	424	245	0,15	0,8	1,80	22 x 35	ECS2CHR471M◇◇△△2235
	560	356	215	0,15	0,9	2,10	22 x 35	ECS2CHR561M◇◇△△2235
		356	215	0,15	0,9	2,20	25 x 30	ECS2CHR561M◇◇△△2530
		356	215	0,15	0,9	2,10	30 x 25	ECS2CHR561M◇◇△△3025
	680	293	178	0,15	1,1	2,60	22 x 40	ECS2CHR681M◇◇△△2240
		293	178	0,15	1,1	2,50	25 x 35	ECS2CHR681M◇◇△△2535
	820	243	145	0,15	1,3	2,80	22 x 50	ECS2CHR821M◇◇△△2250
		243	145	0,15	1,3	2,70	25 x 40	ECS2CHR821M◇◇△△2540
		243	145	0,15	1,3	2,90	30 x 30	ECS2CHR821M◇◇△△3030
		243	145	0,15	1,3	2,80	35 x 25	ECS2CHR821M◇◇△△3525
	1 000	199	115	0,15	1,5	3,30	25 x 45	ECS2CHR102M◇◇△△2545
		199	115	0,15	1,5	3,40	30 x 35	ECS2CHR102M◇◇△△3035
	1 200	199	115	0,15	1,5	3,30	35 x 30	ECS2CHR102M◇◇△△3530
		166	95	0,15	1,5	3,70	25 x 50	ECS2CHR122M◇◇△△2550
		166	95	0,15	1,5	3,80	30 x 40	ECS2CHR122M◇◇△△3040
	1 500	166	95	0,15	1,5	3,60	35 x 35	ECS2CHR122M◇◇△△3535
		133	75	0,15	1,5	4,40	30 x 45	ECS2CHR152M◇◇△△3045
	1 800	133	75	0,15	1,5	4,30	35 x 40	ECS2CHR152M◇◇△△3540
111		70	0,15	1,5	4,40	35 x 45	ECS2CHR182M◇◇△△3545	
2 200	91	58	0,15	1,5	4,90	35 x 50	ECS2CHR222M◇◇△△3550	

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 85°C 120Hz	Size øD x L	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 79
(V)	(µF)	(mΩ)	(mΩ)		(mA)	(Arms)	(mm)	
200 (250) 2D	220	905	375	0,15	0,4	1,20	22 x 25	ECS2DHR221M◇◇△△2225
	330	603	258	0,15	0,7	1,50	22 x 30	ECS2DHR331M◇◇△△2230
		603	258	0,15	0,7	1,60	25 x 25	ECS2DHR331M◇◇△△2525
	390	511	221	0,15	0,8	1,80	22 x 35	ECS2DHR391M◇◇△△2235
		511	221	0,15	0,8	1,80	25 x 30	ECS2DHR391M◇◇△△2530
	470	424	175	0,15	0,9	2,00	22 x 40	ECS2DHR471M◇◇△△2240
		424	175	0,15	0,9	2,10	30 x 25	ECS2DHR471M◇◇△△3025
	560	356	150	0,15	1,1	2,20	22 x 45	ECS2DHR561M◇◇△△2245
		356	150	0,15	1,1	2,20	25 x 35	ECS2DHR561M◇◇△△2535
		356	150	0,15	1,1	2,30	30 x 30	ECS2DHR561M◇◇△△3030
		356	150	0,15	1,1	2,20	35 x 25	ECS2DHR561M◇◇△△3525
	680	293	128	0,15	1,4	2,60	25 x 40	ECS2DHR681M◇◇△△2540
		293	128	0,15	1,4	2,40	30 x 30	ECS2DHR681M◇◇△△3030
	820	243	105	0,15	1,5	2,70	25 x 50	ECS2DHR821M◇◇△△2550
		243	105	0,15	1,5	2,80	30 x 40	ECS2DHR821M◇◇△△3040
	1 000	243	105	0,15	1,5	2,60	35 x 30	ECS2DHR821M◇◇△△3530
		199	80	0,15	1,5	3,40	30 x 40	ECS2DHR102M◇◇△△3040
	1 200	199	80	0,15	1,5	3,60	35 x 35	ECS2DHR102M◇◇△△3535
		166	70	0,15	1,5	3,80	30 x 50	ECS2DHR122M◇◇△△3050
	1 500	166	70	0,15	1,5	3,70	35 x 40	ECS2DHR122M◇◇△△3540
133		55	0,15	1,5	4,20	35 x 50	ECS2DHR152M◇◇△△3550	


U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 85°C 120Hz	Size øD x L	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 79
(V)	(µF)	(mΩ)	(mΩ)		(mA)	(Arms)	(mm)	
250 (300) 2E	150	1327	550	0,15	0,4	0,92	22 x 25	ECS2EHR151M◇◇△△2225
	180	1106	470	0,15	0,5	0,98	22 x 25	ECS2EHR181M◇◇△△2225
		905	370	0,15	0,6	1,25	22 x 30	ECS2EHR221M◇◇△△2230
	220	905	370	0,15	0,6	1,25	25 x 25	ECS2EHR221M◇◇△△2525
		737	305	0,15	0,7	1,25	22 x 35	ECS2EHR271M◇◇△△2235
	330	603	250	0,15	0,8	1,64	22 x 40	ECS2EHR331M◇◇△△2240
		603	250	0,15	0,8	1,64	25 x 30	ECS2EHR331M◇◇△△2530
	390	603	250	0,15	0,8	1,64	30 x 25	ECS2EHR331M◇◇△△3025
		511	221	0,15	1,0	1,90	22 x 45	ECS2EHR391M◇◇△△2245
	470	511	221	0,15	1,0	1,90	25 x 35	ECS2EHR391M◇◇△△2535
		424	175	0,15	1,2	2,20	22 x 50	ECS2EHR471M◇◇△△2250
		424	175	0,15	1,2	2,20	25 x 40	ECS2EHR471M◇◇△△2540
		424	175	0,15	1,2	2,20	30 x 30	ECS2EHR471M◇◇△△3030
	560	424	175	0,15	1,2	2,20	35 x 25	ECS2EHR471M◇◇△△3525
		356	150	0,15	1,4	2,40	25 x 45	ECS2EHR561M◇◇△△2545
	680	356	150	0,15	1,4	2,40	30 x 35	ECS2EHR561M◇◇△△3035
		293	123	0,15	1,5	2,80	30 x 40	ECS2EHR681M◇◇△△3040
	820	293	123	0,15	1,5	2,80	35 x 30	ECS2EHR681M◇◇△△3530
		243	105	0,15	1,5	3,20	30 x 45	ECS2EHR821M◇◇△△3045
	1 000	243	105	0,15	1,5	3,20	35 x 35	ECS2EHR821M◇◇△△3535
199		80	0,15	1,5	3,70	35 x 40	ECS2EHR102M◇◇△△3540	
1 200	166	70	0,15	1,5	4,10	35 x 45	ECS2EHR122M◇◇△△3545	
1 500	133	60	0,15	1,5	4,60	35 x 50	ECS2EHR152M◇◇△△3550	

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 85°C 120Hz	Size øD x L	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 79
(V)	(µF)	(mΩ)	(mΩ)		(mA)	(Arms)	(mm)	
400 (450) 2G	68	2341	960	0,12	0,3	0,62	22 x 25	ECS2GHR680M◇◇△△2225
	100	1592	600	0,12	0,4	0,81	22 x 30	ECS2GHR101M◇◇△△2230
		1592	600	0,12	0,4	0,83	25 x 25	ECS2GHR101M◇◇△△2525
	120	1327	550	0,12	0,5	0,93	22 x 35	ECS2GHR121M◇◇△△2235
		1062	440	0,12	0,6	1,20	22 x 40	ECS2GHR151M◇◇△△2240
	150	1062	440	0,12	0,6	1,20	25 x 30	ECS2GHR151M◇◇△△2530
		1062	440	0,12	0,6	1,20	30 x 25	ECS2GHR151M◇◇△△3025
	180	885	360	0,12	0,7	1,30	22 x 45	ECS2GHR181M◇◇△△2245
		885	360	0,12	0,7	1,30	25 x 35	ECS2GHR181M◇◇△△2535
		885	360	0,12	0,7	1,30	30 x 30	ECS2GHR181M◇◇△△3030
	220	885	360	0,12	0,7	1,30	35 x 25	ECS2GHR181M◇◇△△3525
		724	300	0,12	0,9	1,50	22 x 50	ECS2GHR221M◇◇△△2250
		724	300	0,12	0,9	1,50	25 x 40	ECS2GHR221M◇◇△△2540
	270	724	300	0,12	0,9	1,50	30 x 35	ECS2GHR221M◇◇△△3035
		590	240	0,12	1,1	1,70	25 x 45	ECS2GHR271M◇◇△△2545
	330	590	240	0,12	1,1	1,70	30 x 40	ECS2GHR271M◇◇△△3040
		590	240	0,12	1,1	1,70	35 x 30	ECS2GHR271M◇◇△△3530
	390	483	200	0,12	1,3	2,10	30 x 45	ECS2GHR331M◇◇△△3045
		483	200	0,12	1,3	2,10	35 x 35	ECS2GHR331M◇◇△△3535
	470	409	170	0,12	1,5	2,30	30 x 50	ECS2GHR391M◇◇△△3050
409		170	0,12	1,5	2,30	35 x 40	ECS2GHR391M◇◇△△3540	
560	339	140	0,12	1,5	2,70	35 x 45	ECS2GHR471M◇◇△△3545	
	285	110	0,12	1,5	3,00	35 x 50	ECS2GHR561M◇◇△△3550	

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 85°C 120Hz	Size øD x L	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 79
(V)	(µF)	(mΩ)	(mΩ)		(mA)	(Arms)	(mm)	
450 (500) 2W	47	3387	2800	0,12	0,2	0,52	22 x 25	ECS2WHR470M◇◇△△2225
	68	2341	1940	0,12	0,3	0,66	22 x 30	ECS2WHR680M◇◇△△2230
	68	2341	1940	0,12	0,3	0,66	25 x 25	ECS2WHR680M◇◇△△2525
		1592	1310	0,12	0,5	0,90	22 x 35	ECS2WHR101M◇◇△△2235
	100	1592	1310	0,12	0,5	0,90	25 x 30	ECS2WHR101M◇◇△△2530
		1592	1310	0,12	0,5	0,90	30 x 25	ECS2WHR101M◇◇△△3025
	120	1327	910	0,12	0,5	1,10	22 x 40	ECS2WHR121M◇◇△△2240
		1327	910	0,12	0,5	1,10	25 x 35	ECS2WHR121M◇◇△△2535
	150	1062	880	0,12	0,7	1,30	22 x 50	ECS2WHR151M◇◇△△2250
		1062	880	0,12	0,7	1,30	25 x 40	ECS2WHR151M◇◇△△2540
		1062	880	0,12	0,7	1,30	30 x 30	ECS2WHR151M◇◇△△3030
	180	885	740	0,12	0,8	1,40	25 x 45	ECS2WHR181M◇◇△△2545
		885	740	0,12	0,8	1,40	30 x 35	ECS2WHR181M◇◇△△3035
	220	885	740	0,12	0,8	1,40	35 x 25	ECS2WHR181M◇◇△△3525
		724	590	0,12	1,0	1,60	25 x 50	ECS2WHR221M◇◇△△2550
	270	724	590	0,12	1,0	1,60	30 x 40	ECS2WHR221M◇◇△△3040
		724	590	0,12	1,0	1,60	35 x 30	ECS2WHR221M◇◇△△3530
	330	590	490	0,12	1,2	1,90	30 x 45	ECS2WHR271M◇◇△△3045
		590	490	0,12	1,2	1,90	35 x 35	ECS2WHR271M◇◇△△3535
	390	483	395	0,12	1,5	2,20	35 x 40	ECS2WHR331M◇◇△△3540
409		300	0,12	1,5	2,40	35 x 45	ECS2WHR391M◇◇△△3545	
470	339	280	0,12	1,5	2,80	35 x 50	ECS2WHR471M◇◇△△3550	

SNAP-IN

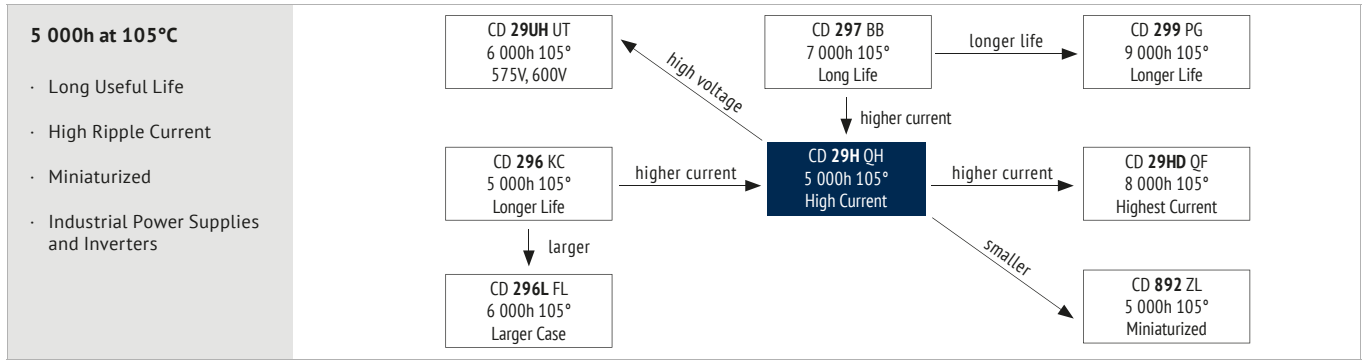


**ITEM CHARACTERISTICS**

Operating Temperature Range (°C)	-40 ~ +105
Voltage Range (V)	160 ~ 450
Capacitance Range (µF)	47 ~ 2 200
Capacitance Tolerance (20°C, 120Hz)	± 20%

**!** The usage at lower temperatures than indicated may be possible. Please contact the Jianghai Europe sales office for approval.

Leakage Current: After 5 minutes at 20°C application of rated voltage, leakage current is not more than specified in table.

Stability at Low Temperature (Impedance Ratio at 120Hz)	Rated Voltage (V)	160 ~ 450
	$Z_{-40°C} / Z_{+20°C}$	4


Fast Charge-Discharge: **!** Please contact Jianghai for an appropriate choice of the capacitor or possible technical adaptations, esp. for applications like: Welding, Photoflash, Servo motors, X-Ray

ITEM	USEFUL LIFE		LOAD LIFE	ENDURANCE TEST	SHELF LIFE	
Lifetime	5 000h	> 100 000h	3 000h	3 000h	1 000h	
Leakage Current	Not more than specified value		Not more than specified value	Not more than specified value	Not more than specified value	
Capacitance Change	Within ± 30% of initial value		Within ± 20% of initial value	Within ± 20% of initial value	Within ± 20% of initial value	
Dissipation Factor	Not more than 300% of specified value		Not more than 200% of specified value	Not more than 200% of specified value	Not more than 200% of specified value	
Condition:						
Applied Voltage	$U_R$	$U_R$	$U_R$	$U_R$	$U_R = 0$	After test: $U_R$ to be applied for 30 min > 24h before measurement
Applied Current	$I_R$	$1,4 \times I_R$	$I_R$	$I_R = 0$	$I_R = 0$	
Applied Temperature	105°C	50°C	105°C	105°C IEC 60384	105°C	

**MULTIPLIER FOR RIPPLE CURRENT (FREQUENCY COEFFICIENT)**

Frequency	50Hz	120Hz	300Hz	1kHz	10kHz	≥ 50 kHz
<b>Coefficient</b>	0,80	1,00	1,16	1,30	1,41	1,45

Multipliers for typical operating conditions.

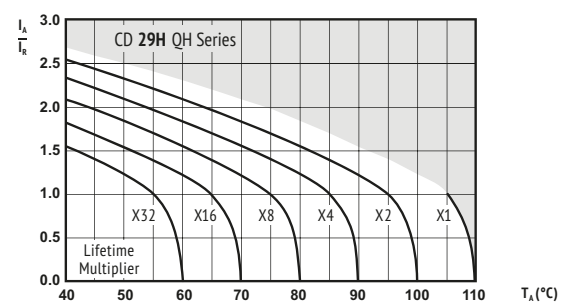**MULTIPLIER FOR LIFETIME (LIFETIME DIAGRAM)**


$I_A$  = actual ripple current at 120Hz,  
 $I_R$  = rated ripple current at 120Hz, 105°C  
 Multiplier of Useful Life as a function of ambient temperature & ripple current load

**!** Max. Current Snap-In Terminal: 15A. For more current use Lug-Terminals.

**ENVIRONMENTAL**

The products are RoHS, WEEE and REAcH compliant. The detailed version please see separate "Environmental Certificates" document or [www.jianghai-europe.com](http://www.jianghai-europe.com)

**! SAFETY FACTOR**

This diagram includes a safety margin. In many cases the allowed current capability/lifetime may be increased. For details and approvals please contact the Jianghai Europe sales office.



U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 105°C 120Hz	Size øD x L	ORDER CODE
(V)	(µF)	(mΩ)	(mΩ)		(mA)	(Arms)	(mm)	Details: Page 79
160 (200) 2C	330	603	355	0,15	0,5	1,42	22 x 25	ECS2CQH331M00002225
	390	511	300	0,15	0,6	1,45	25 x 25	ECS2CQH391M00002525
	470	424	245	0,15	0,8	1,63	22 x 35	ECS2CQH471M00002235
	560	356	215	0,15	0,9	1,75	22 x 35	ECS2CQH561M00002235
		356	215	0,15	0,9	1,75	25 x 30	ECS2CQH561M00002530
		356	215	0,15	0,9	1,75	30 x 25	ECS2CQH561M00003025
	680	293	178	0,15	1,1	1,98	22 x 40	ECS2CQH681M00002240
		293	178	0,15	1,1	1,98	25 x 35	ECS2CQH681M00002535
	820	243	145	0,15	1,3	2,35	22 x 50	ECS2CQH821M00002250
		243	145	0,15	1,3	2,35	25 x 40	ECS2CQH821M00002540
		243	145	0,15	1,3	2,35	30 x 30	ECS2CQH821M00003030
		243	145	0,15	1,3	2,35	35 x 25	ECS2CQH821M00003525
	1 000	199	115	0,15	1,5	2,50	25 x 45	ECS2CQH102M00002545
		199	115	0,15	1,5	2,50	30 x 35	ECS2CQH102M00003035
		199	115	0,15	1,5	2,50	35 x 30	ECS2CQH102M00003530
	1 200	166	95	0,15	1,5	2,87	25 x 50	ECS2CQH122M00002550
		166	95	0,15	1,5	2,87	30 x 40	ECS2CQH122M00003040
		166	95	0,15	1,5	2,87	35 x 35	ECS2CQH122M00003535
	1 500	133	75	0,15	1,5	3,57	30 x 45	ECS2CQH152M00003045
		133	75	0,15	1,5	3,60	35 x 40	ECS2CQH152M00003540
1 800	111	68	0,15	1,5	4,15	35 x 45	ECS2CQH182M00003545	
2 200	91	58	0,15	1,5	4,65	35 x 50	ECS2CQH222M00003550	

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 105°C 120Hz	Size øD x L	ORDER CODE
(V)	(µF)	(mΩ)	(mΩ)		(mA)	(Arms)	(mm)	Details: Page 79
200 (250) 2D	220	905	550	0,15	0,4	1,10	22 x 25	ECS2DQH221M00002225
	270	737	460	0,15	0,5	1,17	22 x 25	ECS2DQH271M00002225
	330	603	370	0,15	0,7	1,40	22 x 30	ECS2DQH331M00002230
		603	370	0,15	0,7	1,40	25 x 25	ECS2DQH331M00002525
	390	511	310	0,15	0,8	1,45	22 x 30	ECS2DQH391M00002230
	470	424	260	0,15	0,9	1,55	22 x 35	ECS2DQH471M00002235
		424	260	0,15	0,9	1,55	25 x 30	ECS2DQH471M00002530
		424	260	0,15	0,9	1,60	30 x 25	ECS2DQH471M00003025
	560	356	220	0,15	1,1	1,65	22 x 45	ECS2DQH561M00002245
		356	220	0,15	1,1	1,65	25 x 35	ECS2DQH561M00002535
		293	180	0,15	1,4	1,68	22 x 50	ECS2DQH681M00002250
	680	293	180	0,15	1,4	1,92	25 x 40	ECS2DQH681M00002540
		293	180	0,15	1,4	1,92	30 x 30	ECS2DQH681M00003030
		293	180	0,15	1,4	2,20	35 x 25	ECS2DQH681M00003525
		243	150	0,15	1,5	2,20	25 x 45	ECS2DQH821M00002545
	820	243	150	0,15	1,5	2,20	30 x 35	ECS2DQH821M00003035
		243	150	0,15	1,5	2,40	35 x 30	ECS2DQH821M00003530
		199	120	0,15	1,5	2,40	30 x 40	ECS2DQH102M00003040
	1 000	199	120	0,15	1,5	2,40	35 x 35	ECS2DQH102M00003535
		166	100	0,15	1,5	2,75	30 x 45	ECS2DQH122M00003045
1 200	166	100	0,15	1,5	2,75	35 x 40	ECS2DQH122M00003540	
	133	80	0,15	1,5	3,45	35 x 40	ECS2DQH152M00003540	
1 800	111	68	0,15	1,5	4,00	35 x 45	ECS2DQH182M00003545	
2 200	91	56	0,15	1,5	4,50	35 x 50	ECS2DQH222M00003550	


U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 105°C 120Hz	Size øD x L	ORDER CODE
(V)	(µF)	(mΩ)	(mΩ)		(mA)	(Arms)	(mm)	Details: Page 79
250 (300) 2E	180	1106	620	0,15	0,5	1,00	22 x 25	ECS2EQH181M00002225
	220	905	570	0,15	0,6	1,20	22 x 30	ECS2EQH221M00002230
	270	905	570	0,15	0,6	1,20	25 x 25	ECS2EQH221M00002525
		737	470	0,15	0,7	1,25	22 x 35	ECS2EQH271M00002235
	330	603	380	0,15	0,8	1,30	22 x 40	ECS2EQH331M00002240
		603	380	0,15	0,8	1,35	25 x 30	ECS2EQH331M00002530
		603	380	0,15	0,8	1,35	30 x 25	ECS2EQH331M00003025
	390	511	325	0,15	1,0	1,40	22 x 45	ECS2EQH391M00002245
		511	325	0,15	1,0	1,45	25 x 35	ECS2EQH391M00002535
	470	424	268	0,15	1,2	1,65	22 x 50	ECS2EQH471M00002250
		424	268	0,15	1,2	1,65	30 x 30	ECS2EQH471M00003030
		424	268	0,15	1,2	1,65	35 x 25	ECS2EQH471M00003525
	560	356	225	0,15	1,4	1,85	25 x 45	ECS2EQH561M00002545
		356	225	0,15	1,4	1,85	30 x 35	ECS2EQH561M00003035
		356	225	0,15	1,4	1,85	35 x 30	ECS2EQH561M00003530
	680	293	185	0,15	1,5	2,20	25 x 50	ECS2EQH681M00002550
		293	185	0,15	1,5	2,20	30 x 40	ECS2EQH681M00003040

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 105°C 120Hz	Size øD x L	ORDER CODE
(V)	(µF)	(mΩ)	(mΩ)		(mA)	(Arms)	(mm)	Details: Page 79
250 (300) 2E	820	243	153	0,15	1,5	2,50	30 x 45	ECS2EQH821M00003045
		243	153	0,15	1,5	2,50	30 x 50	ECS2EQH821M00003050
	1 000	199	125	0,15	1,5	2,90	30 x 50	ECS2EQH102M00003050
		199	125	0,15	1,5	2,90	35 x 40	ECS2EQH102M00003540
	1 200	166	105	0,15	1,5	3,30	35 x 45	ECS2EQH122M00003545
	1 500	133	85	0,15	1,5	3,80	35 x 50	ECS2EQH152M00003550

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 105°C 120Hz	Size øD x L	ORDER CODE
(V)	(µF)	(mΩ)	(mΩ)		(mA)	(Arms)	(mm)	Details: Page 79
350 (400) 2V	68	2926	1280	0,15	0,2	0,70	22 x 25	ECS2VQH680M00002225
	100	1990	1060	0,15	0,4	0,87	22 x 30	ECS2VQH101M00002230
		1990	1060	0,15	0,4	0,87	25 x 25	ECS2VQH101M00002525
	120	1658	880	0,15	0,4	0,90	22 x 35	ECS2VQH121M00002235
	150	1327	700	0,15	0,5	0,98	22 x 40	ECS2VQH151M00002240
		1327	700	0,15	0,5	1,02	25 x 30	ECS2VQH151M00002530
		1327	700	0,15	0,5	1,02	30 x 25	ECS2VQH151M00003025
	180	1106	580	0,15	0,6	1,11	22 x 45	ECS2VQH181M00002245
		1106	580	0,15	0,6	1,11	25 x 35	ECS2VQH181M00002535
		1106	580	0,15	0,6	1,12	30 x 30	ECS2VQH181M00003030
	220	905	470	0,15	0,8	1,16	22 x 50	ECS2VQH221M00002250
		905	480	0,15	0,8	1,20	25 x 40	ECS2VQH221M00002540
		905	480	0,15	0,8	1,20	35 x 25	ECS2VQH221M00003525
	270	737	390	0,15	0,9	1,26	25 x 50	ECS2VQH271M00002550
		737	390	0,15	0,9	1,31	30 x 35	ECS2VQH271M00003035
		737	390	0,15	0,9	1,26	35 x 30	ECS2VQH271M00003530
	330	603	320	0,15	1,2	1,45	30 x 45	ECS2VQH331M00003045
		603	320	0,15	1,2	1,45	35 x 35	ECS2VQH331M00003535
	390	511	270	0,15	1,4	1,58	30 x 50	ECS2VQH391M00003050
		511	270	0,15	1,4	1,58	35 x 40	ECS2VQH391M00003540
470	424	228	0,15	1,5	1,69	35 x 45	ECS2VQH471M00003545	
560	356	190	0,15	1,5	1,89	35 x 50	ECS2VQH561M00003550	

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 105°C 120Hz	Size øD x L	ORDER CODE
(V)	(µF)	(mΩ)	(mΩ)		(mA)	(Arms)	(mm)	Details: Page 79
400 (450) 2G	68	2341	1260	0,12	0,3	0,48	22 x 25	ECS2GQH680M00002225
	82	1941	1050	0,12	0,3	0,57	22 x 30	ECS2GQH820M00002230
		1941	1050	0,12	0,3	0,56	25 x 25	ECS2GQH820M00002525
	100	1592	860	0,12	0,4	0,65	22 x 35	ECS2GQH101M00002235
		1592	860	0,12	0,4	0,65	25 x 25	ECS2GQH101M00002525
	120	1327	718	0,12	0,5	0,71	22 x 35	ECS2GQH121M00002235
		1327	718	0,12	0,5	0,71	25 x 30	ECS2GQH121M00002530
		1327	718	0,12	0,5	0,71	30 x 25	ECS2GQH121M00003025
	150	1062	575	0,12	0,6	0,85	22 x 40	ECS2GQH151M00002240
		1062	575	0,12	0,6	0,85	25 x 35	ECS2GQH151M00002535
		1062	575	0,12	0,6	0,85	30 x 25	ECS2GQH151M00003025
	180	885	479	0,12	0,7	1,00	22 x 50	ECS2GQH181M00002250
		885	479	0,12	0,7	1,00	25 x 40	ECS2GQH181M00002540
		885	479	0,12	0,7	1,00	30 x 30	ECS2GQH181M00003030
	220	885	479	0,12	0,7	1,00	35 x 25	ECS2GQH181M00003525
		724	292	0,12	0,9	1,20	25 x 45	ECS2GQH221M00002545
		724	292	0,12	0,9	1,20	30 x 35	ECS2GQH221M00003035
	2							

$U_{RDC}$ (Surge Voltage) Code	$C_R$ Rated Capacitance	$ESR_{max}$ Equivalent Series Resistance 20°C 120Hz	$ESR_{typ}$ Equivalent Series Resistance 20°C 120Hz	$\tan\delta$ Dissipation Factor 20°C 120Hz	$I_{leak}$ Leakage Current	$I_{RAC}$ Rated Ripple Current 105°C 120Hz	Size $\varnothing D \times L$	ORDER CODE  ◇◇ = pin style & length △△ = pin number  Details: Page 79
(V)	( $\mu F$ )	(m $\Omega$ )	(m $\Omega$ )		(mA)	(Arms)	(mm)	
<b>450 (500) 2W</b>	150	1062	530	0,12	0,7	0,95	22 x 50	ECS2WQH151M◇◇△△2250
		1062	530	0,12	0,7	0,95	25 x 40	ECS2WQH151M◇◇△△2540
		1062	530	0,12	0,7	0,95	30 x 30	ECS2WQH151M◇◇△△3030
	180	1062	530	0,12	0,7	0,95	35 x 25	ECS2WQH151M◇◇△△3525
		885	530	0,12	0,8	1,05	25 x 45	ECS2WQH181M◇◇△△2545
		885	530	0,12	0,8	1,05	30 x 35	ECS2WQH181M◇◇△△3035
	220	724	360	0,12	1,0	1,30	25 x 50	ECS2WQH221M◇◇△△2550
		724	360	0,12	1,0	1,30	30 x 40	ECS2WQH221M◇◇△△3040
		724	360	0,12	1,0	1,30	35 x 30	ECS2WQH221M◇◇△△3530
	270	590	295	0,12	1,2	1,50	30 x 45	ECS2WQH271M◇◇△△3045
		590	295	0,12	1,2	1,50	35 x 35	ECS2WQH271M◇◇△△3535
	330	483	240	0,12	1,5	1,90	30 x 50	ECS2WQH331M◇◇△△3050
		483	240	0,12	1,5	1,90	35 x 40	ECS2WQH331M◇◇△△3540
	390	409	205	0,12	1,5	1,90	35 x 45	ECS2WQH391M◇◇△△3545
	470	339	170	0,12	1,5	2,20	35 x 50	ECS2WQH471M◇◇△△3550

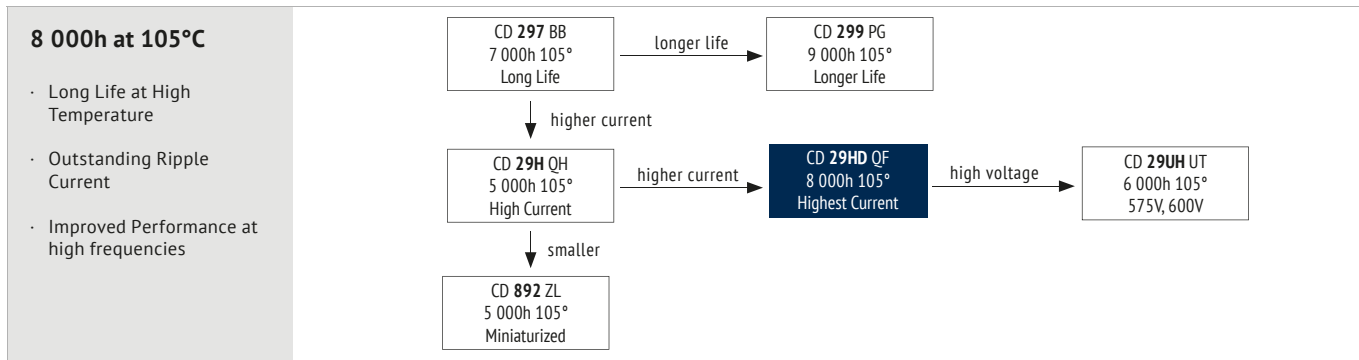

**ITEM CHARACTERISTICS**

Operating Temperature Range (°C)	-40 ~ +105
Voltage Range (V)	200 ~ 450
Capacitance Range (µF)	220 ~ 3 900
Capacitance Tolerance (20°C, 120Hz)	± 20%

**!** The usage at lower temperatures than indicated may be possible. Please contact the Jianghai Europe sales office for approval.

Leakage Current: After 5 minutes at 20°C application of rated voltage, leakage current is not more than specified in table.

Stability at Low Temperature (Impedance Ratio at 120Hz)	Rated Voltage (V)	200 ~ 400	450
	$Z_{-25°C} / Z_{+20°C}$	3	7
	$Z_{-40°C} / Z_{+20°C}$	7	12

Fast Charge-Discharge: **!** Please contact Jianghai for an appropriate choice of the capacitor or possible technical adaptations, esp. for applications like: Welding, Photoflash, Servo motors, X-Ray


ITEM	USEFUL LIFE		LOAD LIFE	ENDURANCE TEST	SHELF LIFE	
Lifetime	8 000h	> 200 000h	3 000h	4 000h	1 000h	
Leakage Current	Not more than specified value		Not more than specified value	Not more than specified value	Not more than specified value	
Capacitance Change	Within ± 30% of initial value		Within ± 20% of initial value	Within ± 20% of initial value	Within ± 20% of initial value	
Dissipation Factor	Not more than 300% of specified value		Not more than 200% of specified value	Not more than 130% of specified value	Not more than 200% of specified value	
Condition: Applied Voltage Applied Current Applied Temperature	$U_R$ $I_R$ 105°C	$U_R$ $1,35 \times I_R$ 40°C	$U_R$ $I_R$ 105°C	$U_R$ $I_R = 0$ 105°C IEC 60384	$U_R = 0$ $I_R = 0$ 105°C	After test: $U_k$ to be applied for 30 min > 24h before measurement

**MULTIPLIER FOR RIPPLE CURRENT (FREQUENCY COEFFICIENT)**

Rated Voltage (V) \ Frequency	50Hz	120Hz	300Hz	1kHz	10kHz	≥50kHz
200 - 350	0,80	1,00	1,35	1,50	1,59	1,60
400	0,80	1,00	1,35	1,60	1,72	1,72
450	0,80	1,00	1,32	1,50	1,62	1,63

Multipliers for typical operating conditions.

**MULTIPLIER FOR LIFETIME (LIFETIME DIAGRAM)**

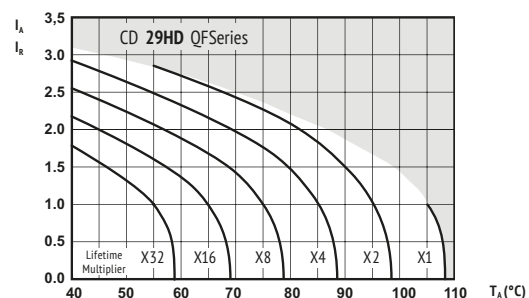

$I_k$  = actual ripple current at 120Hz,  
 $I_R$  = rated ripple current at 120Hz, 105°C  
 Multiplier of Useful Life as a function of ambient temperature & ripple current load

**!** Max. Current Snap-In Terminal: 15A. For more current use Lug-Terminals.

**ENVIRONMENTAL**

The products are RoHS, WEEE and REACH compliant. The detailed version please see separate "Environmental Certificates" document or [www.jianghai-europe.com](http://www.jianghai-europe.com)

**! SAFETY FACTOR**

This diagram includes a safety margin. In many cases the allowed current capability/lifetime may be increased. For details and approvals please contact the Jianghai Europe sales office.



U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 105°C 120Hz	Size øD x L	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 79
(V)	(µF)	(mΩ)	(mΩ)		(mA)	(Arms)	(mm)	
<b>200 (250) 2D</b>	1 000	199	80	0,15	1,5	3,20	30 x 35	ECS2DQF102M◇◇△△3035
	1 200	166	66	0,15	1,5	3,70	30 x 40	ECS2DQF122M◇◇△△3040
	1 500	133	53	0,15	1,5	4,36	30 x 50	ECS2DQF152M◇◇△△3050
		111	48	0,15	1,5	4,58	30 x 55	ECS2DQF182M◇◇△△3055
	1 800	111	48	0,15	1,5	4,67	35 x 45	ECS2DQF182M◇◇△△3545
		111	48	0,15	1,5	4,35	40 x 35	ECS2DQF182M◇◇△△4035
	2 200	91	42	0,15	1,5	5,46	35 x 50	ECS2DQF222M◇◇△△3550
		91	42	0,15	1,5	5,38	40 x 40	ECS2DQF222M◇◇△△4040
	2 700	74	34	0,15	1,5	5,95	35 x 55	ECS2DQF272M◇◇△△3555
		74	34	0,15	1,5	6,05	40 x 50	ECS2DQF272M◇◇△△4050
	3 300	61	30	0,15	1,5	6,41	35 x 65	ECS2DQF332M◇◇△△3565
		61	30	0,15	1,5	6,52	40 x 55	ECS2DQF332M◇◇△△4055
3 900	52	26	0,15	1,5	7,15	40 x 65	ECS2DQF392M◇◇△△4065	

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 105°C 120Hz	Size øD x L	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 79
(V)	(µF)	(mΩ)	(mΩ)		(mA)	(Arms)	(mm)	
<b>250 (300) 2E</b>	680	293	117	0,15	1,5	2,65	30 x 35	ECS2EQF681M◇◇△△3035
	820	243	97	0,15	1,5	3,00	30 x 40	ECS2EQF821M◇◇△△3040
		243	97	0,15	1,5	3,05	35 x 35	ECS2EQF821M◇◇△△3535
	1 000	199	80	0,15	1,5	3,56	30 x 50	ECS2EQF102M◇◇△△3050
		199	80	0,15	1,5	3,52	35 x 40	ECS2EQF102M◇◇△△3540
	1 200	166	66	0,15	1,5	3,93	30 x 55	ECS2EQF122M◇◇△△3055
		166	66	0,15	1,5	3,87	35 x 40	ECS2EQF122M◇◇△△3540
	1 500	133	62	0,15	1,5	4,30	30 x 60	ECS2EQF152M◇◇△△3060
		133	62	0,15	1,5	4,38	35 x 50	ECS2EQF152M◇◇△△3550
	1 800	111	55	0,15	1,5	4,70	35 x 55	ECS2EQF182M◇◇△△3555
		111	55	0,15	1,5	4,85	40 x 45	ECS2EQF182M◇◇△△4045
	2 200	91	45	0,15	1,5	5,15	35 x 65	ECS2EQF222M◇◇△△3565
91		45	0,15	1,5	5,35	40 x 50	ECS2EQF222M◇◇△△4050	
2 700	74	37	0,15	1,5	5,92	40 x 60	ECS2EQF272M◇◇△△4060	

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 105°C 120Hz	Size øD x L	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 79
(V)	(µF)	(mΩ)	(mΩ)		(mA)	(Arms)	(mm)	
<b>350 (400) 2V</b>	330	603	241	0,15	1,2	2,12	30 x 35	ECS2VQF331M◇◇△△3035
	390	511	204	0,15	1,4	2,36	30 x 40	ECS2VQF391M◇◇△△3040
		424	169	0,15	1,5	2,60	30 x 45	ECS2VQF471M◇◇△△3045
	470	424	169	0,15	1,5	2,53	35 x 35	ECS2VQF471M◇◇△△3535
		356	142	0,15	1,5	2,86	30 x 50	ECS2VQF561M◇◇△△3050
	560	356	142	0,15	1,5	2,83	35 x 40	ECS2VQF561M◇◇△△3540
		293	117	0,15	1,5	3,06	30 x 55	ECS2VQF681M◇◇△△3055
	680	293	117	0,15	1,5	3,10	35 x 45	ECS2VQF681M◇◇△△3545
		293	117	0,15	1,5	3,20	40 x 40	ECS2VQF681M◇◇△△4040
	820	243	97	0,15	1,5	3,40	30 x 65	ECS2VQF821M◇◇△△3065
		243	97	0,15	1,5	3,23	35 x 50	ECS2VQF821M◇◇△△3550
		243	97	0,15	1,5	3,46	40 x 45	ECS2VQF821M◇◇△△4045
1 000	199	80	0,15	1,5	3,82	35 x 60	ECS2VQF102M◇◇△△3560	
	199	80	0,15	1,5	3,80	40 x 50	ECS2VQF102M◇◇△△4050	
1 200	166	66	0,15	1,5	4,25	40 x 55	ECS2VQF122M◇◇△△4055	
1 500	133	53	0,15	1,5	4,72	40 x 65	ECS2VQF152M◇◇△△4065	


U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 105°C 120Hz	Size øD x L	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 79
(V)	(µF)	(mΩ)	(mΩ)		(mA)	(Arms)	(mm)	
<b>400 (450) 2G</b>	270	737	270	0,15	1,1	1,62	30 x 35	ECS2GQF271M◇◇△△3035
	330	603	221	0,15	1,3	2,10	30 x 35	ECS2GQF331M◇◇△△3035
		511	187	0,15	1,5	2,20	30 x 40	ECS2GQF391M◇◇△△3040
	390	511	187	0,15	1,5	2,31	35 x 35	ECS2GQF391M◇◇△△3535
		424	155	0,15	1,5	2,70	30 x 50	ECS2GQF471M◇◇△△3050
	470	424	155	0,15	1,5	2,60	35 x 40	ECS2GQF471M◇◇△△3540
		424	155	0,15	1,5	2,75	40 x 35	ECS2GQF471M◇◇△△4035
	560	356	130	0,15	1,5	2,90	30 x 55	ECS2GQF561M◇◇△△3055
		356	130	0,15	1,5	2,95	35 x 45	ECS2GQF561M◇◇△△3545
	680	356	130	0,15	1,5	3,01	40 x 40	ECS2GQF561M◇◇△△4040
		293	107	0,15	1,5	3,25	35 x 50	ECS2GQF681M◇◇△△3550
	820	293	107	0,15	1,5	3,45	40 x 45	ECS2GQF681M◇◇△△4045
243		89	0,15	1,5	3,81	35 x 55	ECS2GQF821M◇◇△△3555	
1 000	243	89	0,15	1,5	3,92	40 x 50	ECS2GQF821M◇◇△△4050	
	199	73	0,15	1,5	4,30	35 x 65	ECS2GQF102M◇◇△△3565	
1 200	166	61	0,15	1,5	4,80	40 x 65	ECS2GQF122M◇◇△△4065	

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 105°C 120Hz	Size øD x L	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 79
(V)	(µF)	(mΩ)	(mΩ)		(mA)	(Arms)	(mm)	
<b>450 (500) 2W</b>	220	1206	362	0,20	1,0	1,67	30 x 35	ECS2WQF221M◇◇△△3035
	270	983	295	0,20	1,2	1,88	30 x 40	ECS2WQF271M◇◇△△3040
		804	241	0,20	1,5	2,18	30 x 45	ECS2WQF331M◇◇△△3045
	330	804	241	0,20	1,5	2,09	35 x 35	ECS2WQF331M◇◇△△3535
		681	204	0,20	1,5	2,45	30 x 50	ECS2WQF391M◇◇△△3050
	390	681	204	0,20	1,5	2,43	35 x 40	ECS2WQF391M◇◇△△3540
		565	169	0,20	1,5	2,79	30 x 55	ECS2WQF471M◇◇△△3055
	470	565	169	0,20	1,5	2,83	35 x 45	ECS2WQF471M◇◇△△3545
		565	169	0,20	1,5	2,70	40 x 35	ECS2WQF471M◇◇△△4035
	560	474	142	0,20	1,5	3,15	30 x 60	ECS2WQF561M◇◇△△3060
		474	142	0,20	1,5	3,20	35 x 50	ECS2WQF561M◇◇△△3550
	680	474	142	0,20	1,5	3,00	40 x 40	ECS2WQF561M◇◇△△4040
391		117	0,20	1,5	3,53	35 x 55	ECS2WQF681M◇◇△△3555	
820	391	117	0,20	1,5	3,40	40 x 45	ECS2WQF681M◇◇△△4045	
	324	97	0,20	1,5	3,85	35 x 65	ECS2WQF821M◇◇△△3565	
1 000	266	80	0,20	1,5	4,26	40 x 65	ECS2WQF102M◇◇△△4065	

SNAP-IN

**7 000h at 85°C**

- Larger Size Components
- Long Useful Life
- High Ripple Current
- Industrial Power Supplies

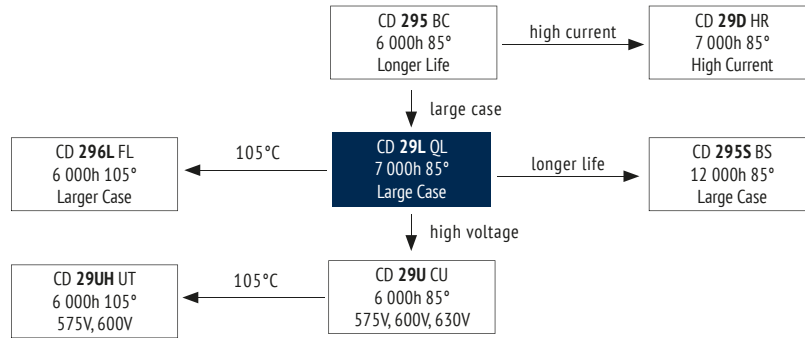

**ITEM CHARACTERISTICS**

Operating Temperature Range (°C)	-40 ~ +85	-25 ~ +85
Voltage Range (V)	16 - 400	450 - 500
Capacitance Range (µF)	390 ~ 120 000	
Capacitance Tolerance (20°C, 120Hz)	± 20%	

**!** The usage at lower temperatures than indicated may be possible. Please contact the Jianghai Europe sales office for approval.

Leakage Current: After 5 minutes at 20°C application of rated voltage, leakage current is not more than specified in table.

Stability at Low Temperature (Impedance Ratio at 120Hz)	Rated Voltage (V)	16 - 35	50 - 100	160 - 200	250 - 400	450	500
	Z <sub>-25°C</sub> / Z <sub>+20°C</sub>		4	3			4
Z <sub>-40°C</sub> / Z <sub>+20°C</sub>		15	10	6	8	-	

Fast Charge-Discharge: **!** Please contact Jianghai for an appropriate choice of the capacitor or possible technical adaptations, esp. for applications like: Welding, Photoflash, Servo motors, X-Ray


ITEM	USEFUL LIFE		LOAD LIFE	ENDURANCE TEST	SHELF LIFE	
Lifetime	7 000h	> 100 000h	5 000h	5 000h	1 000h	
Leakage Current	Not more than specified value		Not more than specified value	Not more than specified value	Not more than specified value	
Capacitance Change	Within ± 30% of initial value		Within ± 20% of initial value	Within ± 20% of initial value	Within ± 20% of initial value	
Dissipation Factor	Not more than 300% of specified value		Not more than 200% of specified value	Not more than 200% of specified value	Not more than 200% of specified value	
Condition: Applied Voltage Applied Current Applied Temperature	U <sub>R</sub> I <sub>R</sub> 85°C	U <sub>R</sub> 1,2 x I <sub>R</sub> 40°C	U <sub>R</sub> I <sub>R</sub> 85°C	U <sub>R</sub> I <sub>R</sub> = 0 85°C IEC 60384	U <sub>R</sub> = 0 I <sub>R</sub> = 0 85°C	After test: U <sub>R</sub> to be applied for 30 min > 24h before measurement

**MULTIPLIER FOR RIPPLE CURRENT (FREQUENCY COEFFICIENT)**

Rated Voltage (V)	Frequency					
	50Hz	120Hz	300Hz	1kHz	10kHz	≥50kHz
≤ 50	0,90	1,00	1,07	1,15	1,15	1,15
63 ~ 100	0,90	1,00	1,17	1,32	1,45	1,50
≥ 160	0,80	1,00	1,16	1,30	1,41	1,45

Multipliers for typical operating conditions.

**MULTIPLIER FOR LIFETIME (LIFETIME DIAGRAM)**

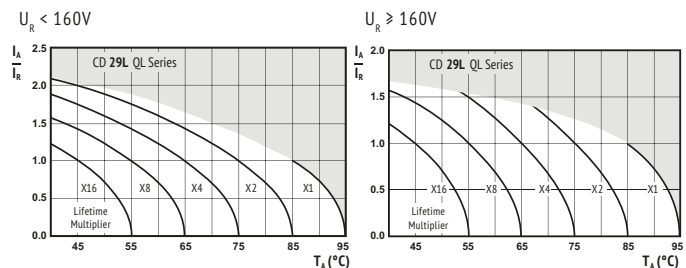

I<sub>A</sub> = actual ripple current at 120Hz,  
I<sub>R</sub> = rated ripple current at 120Hz, 85°C  
Multiplier of Useful Life as a function of ambient temperature & ripple current load

I<sub>A</sub> = actual ripple current at 120Hz,  
I<sub>R</sub> = rated ripple current at 120Hz, 85°C  
Multiplier of Useful Life as a function of ambient temperature & ripple current load

**!** Max. Current Snap-In Terminal: 15A. For more current use Lug-Terminals.

**ENVIRONMENTAL**

The products are RoHS, WEEE and REACH compliant. The detailed version please see separate "Environmental Certificates" document or www.jianghai-europe.com

**!** SAFETY FACTOR

This diagram includes a safety margin. In many cases the allowed current capability/lifetime may be increased. For details and approvals please contact the Jianghai Europe sales office.




U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance (µF)	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz (mΩ)	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz (mΩ)	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current (mA)	I <sub>RAC</sub> Rated Ripple Current 85°C 120Hz (Arms)	Size øD x L (mm)	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 79	
<b>16</b> (20) 1C	56 000	15	10	0,60	1,5	10,4	30 x 45	ECS1CQL563M◇◇△△3045	
		15	10	0,60	1,5	9,8	40 x 40	ECS1CQL563M◇◇△△4040	
	68 000	12	8,0	0,60	1,5	10,8	35 x 50	ECS1CQL683M◇◇△△3550	
		12	8,0	0,60	1,5	11,5	40 x 50	ECS1CQL683M◇◇△△4050	
	82 000	9,8	7,0	0,60	1,5	11,8	35 x 60	ECS1CQL823M◇◇△△3560	
		9,8	7,0	0,60	1,5	11,8	40 x 50	ECS1CQL823M◇◇△△4050	
	100 000	8,0	6,0	0,60	1,5	13,2	35 x 80	ECS1CQL104M◇◇△△3580	
		8,0	6,0	0,60	1,5	13,5	40 x 60	ECS1CQL104M◇◇△△4060	
	120 000	6,7	5,0	0,60	1,5	15,0	35 x 105	ECS1CQL124M◇◇△△35105	
		6,7	5,0	0,60	1,5	14,8	40 x 80	ECS1CQL124M◇◇△△4080	
	<b>25</b> (32) 1E	33 000	21	14	0,50	1,5	8,1	35 x 40	ECS1EQL333M◇◇△△3540
			21	14	0,50	1,5	8,7	40 x 40	ECS1EQL333M◇◇△△4040
39 000		18	12	0,50	1,5	9,0	35 x 45	ECS1EQL393M◇◇△△3545	
		18	12	0,50	1,5	9,6	40 x 40	ECS1EQL393M◇◇△△4040	
47 000		15	10	0,50	1,5	9,6	35 x 50	ECS1EQL473M◇◇△△3550	
		12	8,0	0,50	1,5	10,3	35 x 60	ECS1EQL563M◇◇△△3560	
56 000		12	8,0	0,50	1,5	10,8	40 x 50	ECS1EQL563M◇◇△△4050	
		9,8	7,0	0,50	1,5	11,3	35 x 80	ECS1EQL683M◇◇△△3580	
68 000		9,8	7,0	0,50	1,5	11,8	40 x 60	ECS1EQL683M◇◇△△4060	
		8,1	6,0	0,50	1,5	13,5	40 x 80	ECS1EQL823M◇◇△△4080	
<b>35</b> (44) 1V		27 000	20	14	0,40	1,5	8,2	35 x 45	ECS1VQL273M◇◇△△3545
			20	14	0,40	1,5	8,0	40 x 40	ECS1VQL273M◇◇△△4040
	33 000	17	11	0,40	1,5	8,7	35 x 50	ECS1VQL333M◇◇△△3550	
		14	10	0,40	1,5	10,3	35 x 60	ECS1VQL393M◇◇△△3560	
	39 000	14	10	0,40	1,5	9,6	40 x 50	ECS1VQL393M◇◇△△4050	
		12	8,0	0,40	1,5	11,4	35 x 80	ECS1VQL473M◇◇△△3580	
	47 000	12	8,0	0,40	1,5	10,8	40 x 60	ECS1VQL473M◇◇△△4060	
		9,5	7,0	0,40	1,5	12,1	40 x 70	ECS1VQL563M◇◇△△4070	
	56 000	7,9	6,0	0,40	1,5	14,2	40 x 80	ECS1VQL683M◇◇△△4080	
		<b>50</b> (63) 1H	15 000	27	19	0,30	1,5	7,7	35 x 40
	27			19	0,30	1,5	8,1	40 x 40	ECS1HQL153M◇◇△△4040
	18 000		23	16	0,30	1,5	8,3	35 x 45	ECS1HQL183M◇◇△△3545
23			16	0,30	1,5	8,3	40 x 40	ECS1HQL183M◇◇△△4040	
22 000	19		13	0,30	1,5	9,1	35 x 50	ECS1HQL223M◇◇△△3550	
	19		13	0,30	1,5	9,4	40 x 50	ECS1HQL223M◇◇△△4050	
27 000	15		10	0,30	1,5	11,2	35 x 80	ECS1HQL273M◇◇△△3580	
	15		10	0,30	1,5	10,8	40 x 60	ECS1HQL273M◇◇△△4060	
33 000	13		8,0	0,30	1,5	13,4	35 x 80	ECS1HQL333M◇◇△△3580	
	13		8,0	0,30	1,5	13,4	40 x 70	ECS1HQL333M◇◇△△4070	
39 000	11		7,0	0,30	1,5	15,0	40 x 80	ECS1HQL393M◇◇△△4080	
<b>63</b> (79) 1J	12 000		23	16	0,20	1,5	8,7	35 x 50	ECS1JQL123M◇◇△△3550
		23	16	0,20	1,5	8,6	40 x 40	ECS1JQL123M◇◇△△4040	
	15 000	18	12	0,20	1,5	10,2	35 x 70	ECS1JQL153M◇◇△△3570	
		18	12	0,20	1,5	9,5	40 x 50	ECS1JQL153M◇◇△△4050	
	18 000	15	10	0,20	1,5	11,2	35 x 80	ECS1JQL183M◇◇△△3580	
		15	10	0,20	1,5	10,7	40 x 60	ECS1JQL183M◇◇△△4060	
	27 000	9,9	7,0	0,20	1,5	12,7	40 x 80	ECS1JQL273M◇◇△△4080	
	<b>80</b> (100) 1K	8 200	33	23	0,20	1,5	6,9	35 x 50	ECS1KQL822M◇◇△△3550
			27	19	0,20	1,5	8,7	35 x 60	ECS1KQL103M◇◇△△3560
		10 000	23	16	0,20	1,5	9,7	35 x 70	ECS1KQL123M◇◇△△3570
			23	16	0,20	1,5	9,0	40 x 50	ECS1KQL123M◇◇△△4050
		12 000	18	12	0,20	1,5	10,5	35 x 80	ECS1KQL153M◇◇△△3580
18			12	0,20	1,5	10,2	40 x 60	ECS1KQL153M◇◇△△4060	
15 000		15	10	0,20	1,5	12,3	40 x 80	ECS1KQL183M◇◇△△4080	
		<b>100</b> (125) 2A	5 600	48	33	0,20	1,5	7,0	35 x 45
48				33	0,20	1,5	7,4	40 x 40	ECS2AQL562M◇◇△△4040
6 800			40	27	0,20	1,5	8,0	35 x 50	ECS2AQL682M◇◇△△3550
			40	27	0,20	1,5	8,9	40 x 50	ECS2AQL682M◇◇△△4050
8 200			33	23	0,20	1,5	9,6	35 x 70	ECS2AQL822M◇◇△△3570
	33		23	0,20	1,5	9,6	40 x 60	ECS2AQL822M◇◇△△4060	
10 000	27		19	0,20	1,5	10,4	35 x 80	ECS2AQL103M◇◇△△3580	
	27		19	0,20	1,5	10,2	40 x 60	ECS2AQL103M◇◇△△4060	
12 000	23		16	0,20	1,5	12,3	40 x 80	ECS2AQL123M◇◇△△4080	

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance (µF)	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz (mΩ)	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz (mΩ)	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current (mA)	I <sub>RAC</sub> Rated Ripple Current 85°C 120Hz (Arms)	Size øD x L (mm)	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 79	
<b>160</b> (200) 2C	2 200	91	63	0,15	1,5	4,9	35 x 45	ECS2CQL222M◇◇△△3545	
		74	52	0,15	1,5	5,3	35 x 50	ECS2CQL272M◇◇△△3550	
	3 300	61	42	0,15	1,5	5,5	35 x 70	ECS2CQL332M◇◇△△3570	
		61	42	0,15	1,5	5,5	40 x 60	ECS2CQL332M◇◇△△4060	
	3 900	52	36	0,15	1,5	5,9	35 x 80	ECS2CQL392M◇◇△△3580	
		43	30	0,15	1,5	7,3	40 x 80	ECS2CQL472M◇◇△△4080	
<b>200</b> (250) 2D	1 500	133	93	0,15	1,5	4,3	35 x 40	ECS2DQL152M◇◇△△3540	
		111	77	0,15	1,5	4,7	35 x 45	ECS2DQL182M◇◇△△3545	
	1 800	91	63	0,15	1,5	5,4	35 x 50	ECS2DQL222M◇◇△△3550	
		91	63	0,15	1,5	5,4	40 x 40	ECS2DQL222M◇◇△△4040	
	2 200	74	52	0,15	1,5	5,9	35 x 60	ECS2DQL272M◇◇△△3560	
		74	52	0,15	1,5	5,9	40 x 50	ECS2DQL272M◇◇△△4050	
	2 700	61	42	0,15	1,5	6,5	35 x 80	ECS2DQL332M◇◇△△3580	
		61	42	0,15	1,5	6,5	40 x 60	ECS2DQL332M◇◇△△4060	
	3 900	52	36	0,15	1,5	7,0	40 x 80	ECS2DQL392M◇◇△△4080	
		43	30	0,15	1,5	9,2	40 x 90	ECS2DQL472M◇◇△△4090	
	<b>250</b> (300) 2E	1 000	199	139	0,15	1,5	3,7	35 x 40	ECS2EQL102M◇◇△△3540
			166	116	0,15	1,5	3,8	35 x 45	ECS2EQL122M◇◇△△3545
1 500		133	93	0,15	1,5	4,4	35 x 50	ECS2EQL152M◇◇△△3550	
		133	93	0,15	1,5	4,5	40 x 40	ECS2EQL152M◇◇△△4040	
1 800		111	77	0,15	1,5	5,0	35 x 70	ECS2EQL182M◇◇△△3570	
		111	77	0,15	1,5	5,0	40 x 50	ECS2EQL182M◇◇△△4050	
2 200	91	63	0,15	1,5	5,4	35 x 70	ECS2EQL222M◇◇△△3570		
	74	52	0,15	1,5	6,9	40 x 80	ECS2EQL272M◇◇△△4080		
<b>350</b> (400) 2V	680	293	205	0,15	1,5	3,6	35 x 45	ECS2VQL681M◇◇△△3545	
		293	205	0,15	1,5	3,6	40 x 40	ECS2VQL681M◇◇△△4040	
	820	243	170	0,15	1,5	4,5	35 x 60	ECS2VQL821M◇◇△△3560	
		243	170	0,15	1,5	4,3	40 x 50	ECS2VQL821M◇◇△△4050	
	1 000	199	139	0,15	1,5	5,2	35 x 70	ECS2VQL102M◇◇△△3570	
		199	139	0,15	1,5	4,9	40 x 60	ECS2VQL102M◇◇△△4060	
	1 200	166	116	0,15	1,5	5,5	35 x 80	ECS2VQL122M◇◇△△3580	
		166	116	0,15	1,5	5,6	40 x 70	ECS2VQL122M◇◇△△4070	
	1 500	133	93	0,15	1,5	6,5	40 x 80	ECS2VQL152M◇◇△△4080	
		133	93	0,15	1,5	6,2	45 x 70	ECS2VQL152M◇◇△△4570	
	1 800	111	77	0,15	1,5	7,9	40 x 100	ECS2VQL182M◇◇△△40100	
		111	77	0,15	1,5	7,1	45 x 70	ECS2VQL182M◇◇△△4570	
2 200	91	63	0,15	1,5	8,7	40 x 100	ECS2VQL222M◇◇△△40100		
<b>400</b> (450) 2G	560	356	249	0,15	1,5	3,2	35 x 50	ECS2GQL561M◇◇△△3550	
		356	249	0,15	1,5	2,8	40 x 40	ECS2GQL561M◇◇△△4040	
	680	293	205	0,15	1,5	3,7	35 x 60	ECS2GQL681M◇◇△△3560	
		293	205	0,15	1,5	3,8	40 x 50	ECS2GQL681M◇◇△△4050	
	820	243	170	0,15	1,5	4,2	35 x 60	ECS2GQL821M◇◇△△3560	
		243	170	0,15	1,5	4,1	40 x 50	ECS2GQL821M◇◇△△4050	
	1 000	199	139	0,15	1,5	4,9	35 x 70	ECS2GQL102M◇◇△△3570	
		199	139	0,15	1,5	4,8	40 x 60	ECS2GQL102M◇◇△△4060	
	1 200	199	139	0,15	1,5	4,6	45 x 50	ECS2GQL102M◇◇△△4550	
		166	116	0,15	1,5	5,8	35 x 80	ECS2GQL122M◇◇△△3580	
	1 500	166	116	0,15	1,5	5,5	40 x 60	ECS2GQL122M◇◇△△4060	
		133	93	0,15	1,5	6,9	40 x 90	ECS2GQL152M◇◇△△4090	
1 800	133	93	0,15	1,5	6,8	45 x 80	ECS2GQL152M◇◇△△4580		
	111	77	0,15	1,5	7,9	40 x 100	ECS2GQL182M◇◇△△40100		
2 200	111	77	0,15	1,5	7,3	45 x 80	ECS2GQL182M◇◇△△4580		
	91	63	0,15	1,5	8,8	40 x 110	ECS2GQL222M◇◇△△40110		
91	63	0,15	1,5	8,3	45 x 90	ECS2GQL222M◇◇△△4590			
<b>450</b> (500) 2W	470	424	296	0,15	1,5	3,0	35 x 50	ECS2WQL471M◇◇△△3550	
		424	296	0,15	1,5	3,0	40 x 40	ECS2WQL471M◇◇△△4040	
	560	356	249	0,15	1,5	3,1	35 x 50	ECS2WQL561M◇◇△△3550	
		356	249	0,15	1,5	3,3	35 x 60	ECS2WQL561M◇◇△△3560	

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 85°C 120Hz	Size øD x L	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 79
(V)	(μF)	(mΩ)	(mΩ)		(mA)	(Arms)	(mm)	
450 (500) 2W	1 000	199	139	0,15	1,5	5,7	35 x 80	ECS2WQL102M◇◇△△3580
		199	139	0,15	1,5	5,2	40 x 60	ECS2WQL102M◇◇△△4060
	1 200	166	116	0,15	1,5	5,9	40 x 70	ECS2WQL122M◇◇△△4070
		166	116	0,15	1,5	6,2	45 x 70	ECS2WQL122M◇◇△△4570
	1 500	133	93	0,15	1,5	7,3	40 x 100	ECS2WQL152M◇◇△△40100
		133	93	0,15	1,5	7,0	45 x 80	ECS2WQL152M◇◇△△4580
1 800	111	77	0,15	1,5	7,9	45 x 100	ECS2WQL182M◇◇△△45100	
500 (550) 2H	390	511	357	0,15	1,5	1,9	35 x 50	ECS2HQL391M◇◇△△3550
	470	424	296	0,15	1,5	2,3	35 x 60	ECS2HQL471M◇◇△△3560
	560	356	249	0,15	1,5	2,5	35 x 60	ECS2HQL561M◇◇△△3560
		356	249	0,15	1,5	2,7	40 x 60	ECS2HQL561M◇◇△△4060
	680	293	205	0,15	1,5	3,1	35 x 80	ECS2HQL681M◇◇△△3580
		293	205	0,15	1,5	2,8	40 x 70	ECS2HQL681M◇◇△△4070
	820	243	170	0,15	1,5	3,4	35 x 90	ECS2HQL821M◇◇△△3590
		243	170	0,15	1,5	3,3	40 x 70	ECS2HQL821M◇◇△△4070
	1 000	199	139	0,15	1,5	3,9	40 x 80	ECS2HQL102M◇◇△△4080
		199	139	0,15	1,5	3,9	45 x 70	ECS2HQL102M◇◇△△4570
	1 200	166	116	0,15	1,5	4,3	40 x 90	ECS2HQL122M◇◇△△4090
	1 500	133	93	0,15	1,5	4,8	40 x 100	ECS2HQL152M◇◇△△40100

SNAP-IN

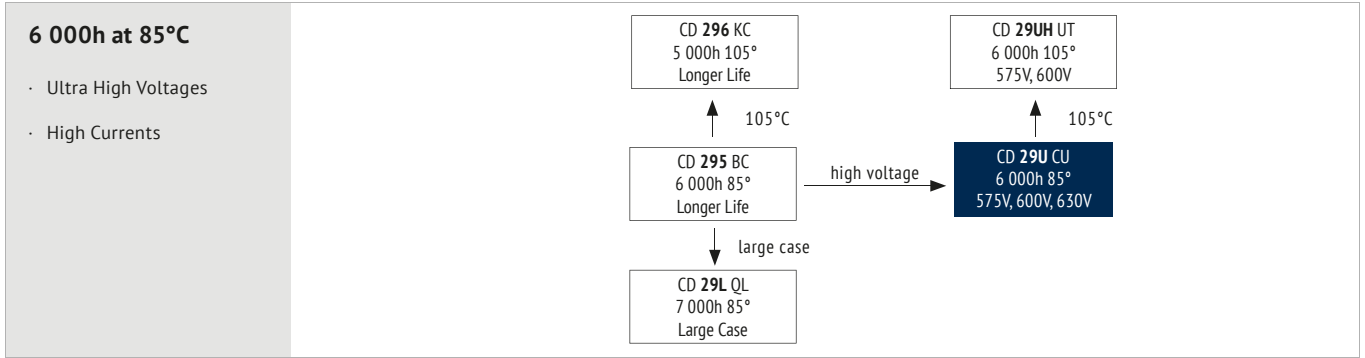


**ITEM CHARACTERISTICS**

Operating Temperature Range (°C)	-25 ~ +85
Voltage Range (V)	575, 600, 630
Capacitance Range (µF)	150 ~ 1 500
Capacitance Tolerance (20°C, 120Hz)	± 20%

**!** The usage at lower temperatures than indicated may be possible. Please contact the Jianghai Europe sales office for approval.

Leakage Current: After 5 minutes at 20°C application of rated voltage, leakage current is not more than specified in table.

Stability at Low Temperature (Impedance Ratio at 120Hz)	Rated Voltage (V)	575	600	630
	Z <sub>-25°C</sub> / Z <sub>+20°C</sub>	12		


Fast Charge-Discharge: **!** Please contact Jianghai for an appropriate choice of the capacitor or possible technical adaptations, esp. for applications like: Welding, Photoflash, Servo motors, X-Ray

ITEM	USEFUL LIFE		LOAD LIFE	ENDURANCE TEST	SHELF LIFE	
Lifetime	6 000h	> 100 000h	3 000h	3 000h	1 000h	
Leakage Current	Not more than specified value		Not more than specified value	Not more than specified value	Not more than specified value	
Capacitance Change	Within ± 30% of initial value		Within ± 20% of initial value	Within ± 20% of initial value	Within ± 20% of initial value	
Dissipation Factor	Not more than 300% of specified value		Not more than 200% of specified value	Not more than 200% of specified value	Not more than 200% of specified value	
Condition:						
Applied Voltage	$U_R$	$U_R$	$U_R$	$U_R$	$U_R = 0$	After test: $U_R$ to be applied for 30 min > 24h before measurement
Applied Current	$I_R$	$1,2 \times I_R$	$I_R$	$I_R = 0$	$I_R = 0$	
Applied Temperature	85°C	40°C	85°C	85°C IEC 60384	85°C	

**MULTIPLIER FOR RIPPLE CURRENT (FREQUENCY COEFFICIENT)**

Frequency	50Hz	120Hz	300Hz	1kHz	10kHz	≥ 50 kHz
<b>Coefficient</b>	0,80	1,00	1,16	1,30	1,41	1,45

Multipliers for typical operating conditions.

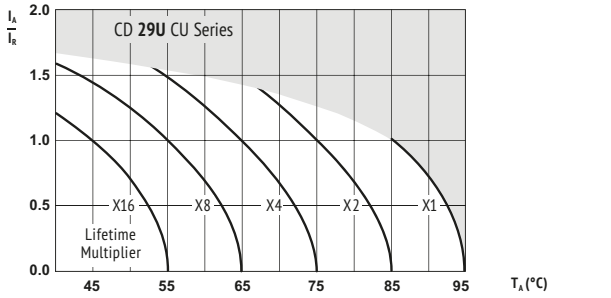**MULTIPLIER FOR LIFETIME (LIFETIME DIAGRAM)**


$I_A$  = actual ripple current at 120Hz,  
 $I_R$  = rated ripple current at 120Hz, 85°C  
 Multiplier of Useful Life as a function of ambient temperature & ripple current load

**!** Max. Current Snap-In Terminal: 15A. For more current use Lug-Terminals.

**ENVIRONMENTAL**

The products are RoHS, WEEE and RECh compliant. The detailed version please see separate "Environmental Certificates" document or [www.jianghai-europe.com](http://www.jianghai-europe.com)

**! SAFETY FACTOR**

This diagram includes a safety margin. In many cases the allowed current capability/lifetime may be increased. For details and approvals please contact the Jianghai Europe sales office.


SNAP-IN



SNAP-IN

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 85°C 120Hz	Size øD x L	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 79
(V)	(µF)	(mΩ)	(mΩ)		(mA)	(Arms)	(mm)	
575 (625) 2Z	180	1 106	627	0,2	1,0	1,15	30 x 45	ECS2ZCU181M◇◇△△3045
	220	905	513	0,2	1,3	1,30	30 x 50	ECS2ZCU221M◇◇△△3050
	270	737	418	0,2	1,5	1,55	30 x 60	ECS2ZCU271M◇◇△△3060
		737	418	0,2	1,5	1,55	35 x 45	ECS2ZCU271M◇◇△△3545
	330	603	342	0,2	1,5	1,75	30 x 70	ECS2ZCU331M◇◇△△3070
		603	342	0,2	1,5	1,75	35 x 50	ECS2ZCU331M◇◇△△3550
		603	342	0,2	1,5	1,75	40 x 45	ECS2ZCU331M◇◇△△4045
	390	510	289	0,2	1,5	1,95	30 x 85	ECS2ZCU391M◇◇△△3085
		510	289	0,2	1,5	1,95	35 x 60	ECS2ZCU391M◇◇△△3560
		510	289	0,2	1,5	1,95	40 x 55	ECS2ZCU391M◇◇△△4055
	470	423	240	0,2	1,5	2,15	35 x 70	ECS2ZCU471M◇◇△△3570
		423	240	0,2	1,5	2,15	40 x 60	ECS2ZCU471M◇◇△△4060
		423	240	0,2	1,5	2,15	45 x 50	ECS2ZCU471M◇◇△△4550
	560	355	201	0,2	1,5	2,40	35 x 80	ECS2ZCU561M◇◇△△3580
		355	201	0,2	1,5	2,40	40 x 70	ECS2ZCU561M◇◇△△4070
		355	201	0,2	1,5	2,40	45 x 55	ECS2ZCU561M◇◇△△4555
	680	293	166	0,2	1,5	2,72	35 x 95	ECS2ZCU681M◇◇△△3595
		293	166	0,2	1,5	2,72	40 x 80	ECS2ZCU681M◇◇△△4080
		293	166	0,2	1,5	2,72	45 x 65	ECS2ZCU681M◇◇△△4565
	820	243	138	0,2	1,5	3,05	40 x 100	ECS2ZCU821M◇◇△△40100
243		138	0,2	1,5	3,05	45 x 75	ECS2ZCU821M◇◇△△4575	
1 000	199	113	0,2	1,5	3,20	45 x 90	ECS2ZCU102M◇◇△△4590	
	199	113	0,2	1,5	3,20	50 x 75	ECS2ZCU102M◇◇△△5075	
1 200	166	94	0,2	1,5	3,35	45 x 105	ECS2ZCU122M◇◇△△45105	
	166	94	0,2	1,5	3,35	50 x 85	ECS2ZCU122M◇◇△△5085	
1 500	133	75	0,2	1,5	3,50	50 x 100	ECS2ZCU152M◇◇△△50100	
600 (650) 2S	150	1 327	752	0,2	0,9	0,95	30 x 45	ECS2SCU151M◇◇△△3045
	180	1 106	627	0,2	1,1	1,10	30 x 50	ECS2SCU181M◇◇△△3050
	220	905	495	0,2	1,3	1,22	30 x 60	ECS2SCU221M◇◇△△3060
	270	737	403	0,2	1,5	1,25	30 x 70	ECS2SCU271M◇◇△△3070
	330	603	330	0,2	1,5	1,35	30 x 80	ECS2SCU331M◇◇△△3080
		603	330	0,2	1,5	1,35	40 x 50	ECS2SCU331M◇◇△△4050
	390	510	279	0,2	1,5	1,48	40 x 60	ECS2SCU391M◇◇△△4060
	470	423	232	0,2	1,5	1,65	40 x 70	ECS2SCU471M◇◇△△4070
		423	232	0,2	1,5	1,65	45 x 55	ECS2SCU471M◇◇△△4555
	560	355	194	0,2	1,5	1,75	40 x 80	ECS2SCU561M◇◇△△4080
		355	194	0,2	1,5	1,75	45 x 60	ECS2SCU561M◇◇△△4560
	680	293	160	0,2	1,5	1,83	40 x 90	ECS2SCU681M◇◇△△4090
		293	160	0,2	1,5	1,83	45 x 70	ECS2SCU681M◇◇△△4570
	820	243	133	0,2	1,5	2,00	45 x 85	ECS2SCU821M◇◇△△4585
		243	133	0,2	1,5	2,00	50 x 70	ECS2SCU821M◇◇△△5070
	1 000	199	109	0,2	1,5	2,25	45 x 100	ECS2SCU102M◇◇△△45100
199		109	0,2	1,5	2,25	50 x 80	ECS2SCU102M◇◇△△5080	
1 200	166	91	0,2	1,5	2,45	50 x 95	ECS2SCU122M◇◇△△5095	
630 (680) J2	150	1 327	708	0,2	0,9	0,93	30 x 45	ECSJ2CU151M◇◇△△3045
	180	1 106	590	0,2	1,1	1,00	30 x 50	ECSJ2CU181M◇◇△△3050
	220	905	483	0,2	1,4	1,10	30 x 60	ECSJ2CU221M◇◇△△3060
	270	737	393	0,2	1,5	1,20	30 x 70	ECSJ2CU271M◇◇△△3070
	330	603	322	0,2	1,5	1,32	30 x 85	ECSJ2CU331M◇◇△△3085
		603	322	0,2	1,5	1,32	40 x 50	ECSJ2CU331M◇◇△△4050
	390	510	272	0,2	1,5	1,45	40 x 60	ECSJ2CU391M◇◇△△4060
	470	423	226	0,2	1,5	1,60	40 x 70	ECSJ2CU471M◇◇△△4070
		423	226	0,2	1,5	1,60	45 x 55	ECSJ2CU471M◇◇△△4555
	560	355	190	0,2	1,5	1,70	40 x 80	ECSJ2CU561M◇◇△△4080
		355	190	0,2	1,5	1,70	45 x 65	ECSJ2CU561M◇◇△△4565
	680	293	156	0,2	1,5	1,80	40 x 95	ECSJ2CU681M◇◇△△4095
		293	156	0,2	1,5	1,80	45 x 75	ECSJ2CU681M◇◇△△4575
	820	243	129	0,2	1,5	1,95	45 x 90	ECSJ2CU821M◇◇△△4590
		243	129	0,2	1,5	1,95	50 x 75	ECSJ2CU821M◇◇△△5075
	1 000	199	106	0,2	1,5	2,18	45 x 105	ECSJ2CU102M◇◇△△45105
199		106	0,2	1,5	2,18	50 x 85	ECSJ2CU102M◇◇△△5085	
1 200	166	88	0,2	1,5	2,35	50 x 105	ECSJ2CU122M◇◇△△50105	



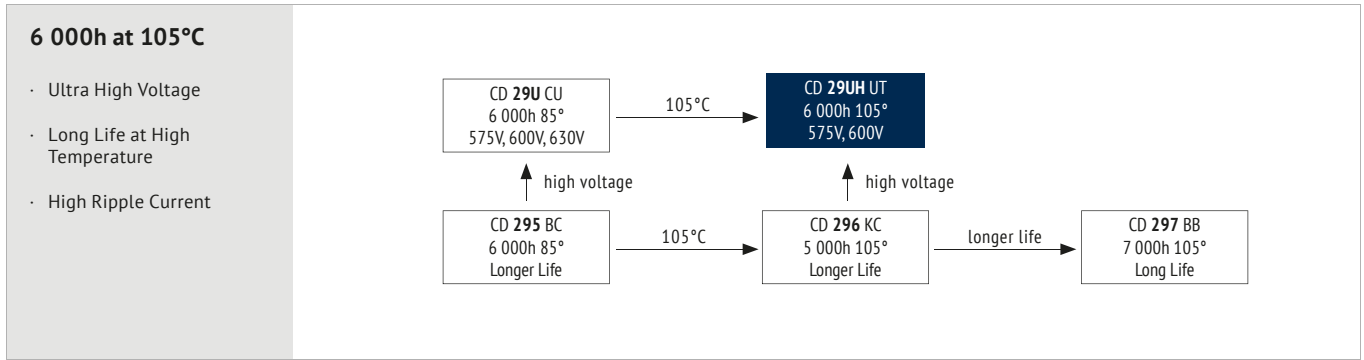

**ITEM CHARACTERISTICS**

Operating Temperature Range (°C)	-25 ~ +105
Voltage Range (V)	575 ~ 600
Capacitance Range (µF)	56 ~ 390
Capacitance Tolerance (20°C, 120Hz)	± 20%

**!** The usage at lower temperatures than indicated may be possible. Please contact the Jianghai Europe sales office for approval.

Leakage Current: After 5 minutes at 20°C application of rated voltage, leakage current is not more than specified in table.

Stability at Low Temperature (Impedance Ratio at 120Hz)	Rated Voltage (V)	575	600
	Z <sub>-25°C</sub> / Z <sub>+20°C</sub>	8	

Fast Charge-Discharge: **!** Please contact Jianghai for an appropriate choice of the capacitor or possible technical adaptations, esp. for applications like: Welding, Photoflash, Servo motors, X-Ray


ITEM	USEFUL LIFE		LOAD LIFE	ENDURANCE TEST	SHELF LIFE	
Lifetime	6 000h	> 200 000h	3 000h	3 000h	500h	
Leakage Current	Not more than specified value		Not more than specified value	Not more than specified value	Not more than specified value	
Capacitance Change	Within ± 30% of initial value		Within ± 20% of initial value	Within ± 20% of initial value	Within ± 20% of initial value	
Dissipation Factor	Not more than 300% of specified value		Not more than 200% of specified value	Not more than 200% of specified value	Not more than 200% of specified value	
Condition: Applied Voltage Applied Current Applied Temperature	U <sub>R</sub> I <sub>R</sub> 105°C	U <sub>R</sub> 1,4 x I <sub>R</sub> 40°C	U <sub>R</sub> I <sub>R</sub> 105°C	U <sub>R</sub> I <sub>R</sub> = 0 105°C IEC 60384	U <sub>R</sub> = 0 I <sub>R</sub> = 0 105°C	After test: U <sub>R</sub> to be applied for 30 min > 24h before measurement

**MULTIPLIER FOR RIPPLE CURRENT (FREQUENCY COEFFICIENT)**

Frequency	50Hz	120Hz	300Hz	1kHz	10kHz	≥ 50 kHz
<b>Coefficient</b>	0,75	1,00	1,16	1,30	1,41	1,45

Multipliers for typical operating conditions.

**MULTIPLIER FOR LIFETIME (LIFETIME DIAGRAM)**

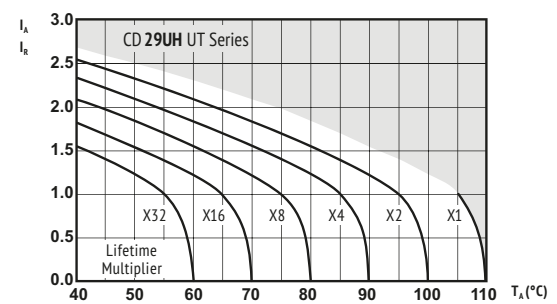

I<sub>A</sub> = actual ripple current at 120Hz, I<sub>R</sub> = rated ripple current at 120Hz, 105°C  
Multiplier of Useful Life as a function of ambient temperature & ripple current load

**!** Max. Current Snap-In Terminal: 15A. For more current use Lug-Terminals.

**ENVIRONMENTAL**

The products are RoHS, WEEE and REAcH compliant. The detailed version please see separate "Environmental Certificates" document or [www.jianghai-europe.com](http://www.jianghai-europe.com)

**! SAFETY FACTOR**


This diagram includes a safety margin. In many cases the allowed current capability/lifetime may be increased. For details and approvals please contact the Jianghai Europe sales office.

SNAP-IN

$U_{RDC}$ (Surge Voltage) Code	$C_R$ Rated Capacitance	$ESR_{max}$ Equivalent Series Resistance 20°C 120Hz	$ESR_{typ}$ Equivalent Series Resistance 20°C 120Hz	$\tan\delta$ Dissipation Factor 20°C 120Hz	$I_{leak}$ Leakage Current	$I_{RAC}$ Rated Ripple Current 105°C 120Hz	Size $\phi D \times L$	ORDER CODE  ◇◇ = pin style & length △△ = pin number  Details: Page 79
(V)	(μF)	(mΩ)	(mΩ)		(mA)	(Arms)	(mm)	
575 (625) ZZ	68	3903	1659	0,20	0,4	0,52	30 x 25	ECS2ZUT680M◇◇△△3025
	82	3236	1376	0,20	0,5	0,58	30 x 30	ECS2ZUT820M◇◇△△3030
	100	2654	1128	0,20	0,6	0,63	30 x 35	ECS2ZUT101M◇◇△△3035
	120	2212	940	0,20	0,7	0,70	30 x 40	ECS2ZUT121M◇◇△△3040
	150	1769	752	0,20	0,9	0,81	30 x 45	ECS2ZUT151M◇◇△△3045
	180	1474	627	0,20	1,0	0,89	30 x 50	ECS2ZUT181M◇◇△△3050
	220	1206	513	0,20	1,3	1,01	30 x 60	ECS2ZUT221M◇◇△△3060
	270	983	418	0,20	1,5	1,12	30 x 70	ECS2ZUT271M◇◇△△3070
		983	418	0,20	1,5	1,12	35 x 55	ECS2ZUT271M◇◇△△3555
	330	804	342	0,20	1,5	1,21	30 x 85	ECS2ZUT331M◇◇△△3085
		804	342	0,20	1,5	1,21	35 x 60	ECS2ZUT331M◇◇△△3560
		804	342	0,20	1,5	1,21	40 x 50	ECS2ZUT331M◇◇△△4050
	390	680	289	0,20	1,5	1,30	35 x 65	ECS2ZUT391M◇◇△△3565
		680	289	0,20	1,5	1,30	40 x 60	ECS2ZUT391M◇◇△△4060
600 (650) ZS	56	4739	2014	0,20	0,3	0,50	30 x 25	ECS2SUT560M◇◇△△3025
	68	3903	1659	0,20	0,4	0,56	30 x 30	ECS2SUT680M◇◇△△3030
	82	3236	1376	0,20	0,5	0,61	30 x 35	ECS2SUT820M◇◇△△3035
		3236	1376	0,20	0,5	0,61	35 x 25	ECS2SUT820M◇◇△△3525
	100	2654	1128	0,20	0,6	0,67	30 x 40	ECS2SUT101M◇◇△△3040
		2654	1128	0,20	0,6	0,67	35 x 30	ECS2SUT101M◇◇△△3530
	120	2212	940	0,20	0,7	0,74	30 x 45	ECS2SUT121M◇◇△△3045
		2212	940	0,20	0,7	0,74	35 x 35	ECS2SUT121M◇◇△△3535
	150	1769	752	0,20	0,9	0,83	30 x 50	ECS2SUT151M◇◇△△3050
		1769	752	0,20	0,9	0,83	35 x 40	ECS2SUT151M◇◇△△3540
	180	1474	627	0,20	1,1	0,91	30 x 55	ECS2SUT181M◇◇△△3055
		1474	627	0,20	1,1	0,91	35 x 45	ECS2SUT181M◇◇△△3545
	220	1206	513	0,20	1,3	1,05	30 x 60	ECS2SUT221M◇◇△△3060
		1206	513	0,20	1,3	1,05	35 x 50	ECS2SUT221M◇◇△△3550
	270	983	418	0,20	1,5	1,17	35 x 55	ECS2SUT271M◇◇△△3555
	330	804	342	0,20	1,5	1,27	35 x 65	ECS2SUT331M◇◇△△3565

SNAP-IN



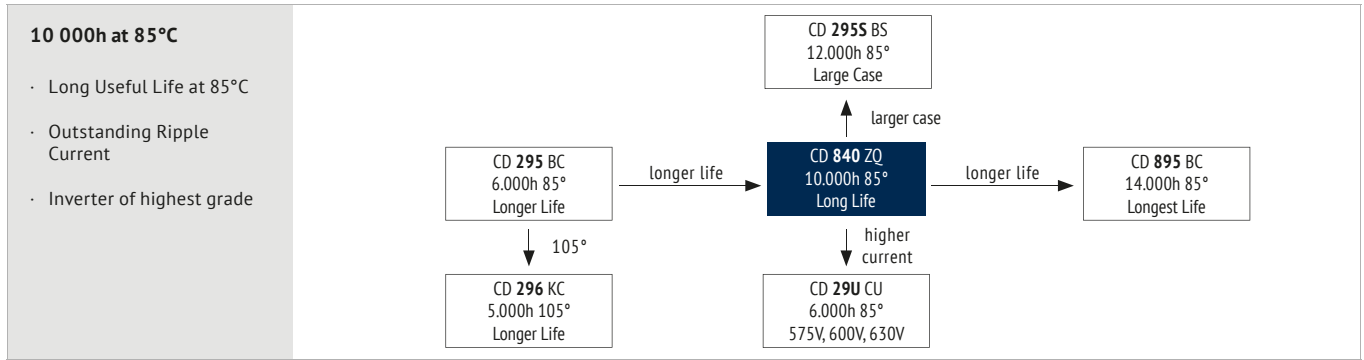

ITEM	CHARACTERISTICS
------	-----------------

Operating Temperature Range (°C)	-40 ~ +85
Voltage Range (V)	200 ~ 450
Capacitance Range (µF)	68 ~ 2 200
Capacitance Tolerance (20°C, 120Hz)	± 20%

**!** The usage at lower temperatures than indicated may be possible. Please contact the Jianghai Europe sales office for approval.

Leakage Current After 5 minutes at 20°C application of rated voltage, leakage current is not more than specified in table.

Stability at Low Temperature (Impedance Ratio at 120Hz)	Rated Voltage (V)	200 ~ 450
	$Z_{-25°C} / Z_{+20°C}$	4

**!** Please contact Jianghai for an appropriate choice of the capacitor or possible technical adaptations, esp. for applications like: Welding, Photoflash, Servo motors, X-Ray


ITEM	USEFUL LIFE		LOAD LIFE	ENDURANCE TEST	SHELF LIFE	
Lifetime	10 000h	> 100 000h	5 000h	5 000h	1 000h	
Leakage Current	Not more than specified value		Not more than specified value	Not more than specified value	Not more than specified value	
Capacitance Change	Within ± 30% of initial value		Within ± 20% of initial value	Within ± 20% of initial value	Within ± 15% of initial value	
Dissipation Factor	Not more than 300% of specified value		Not more than 200% of specified value	Not more than 200% of specified value	Not more than 150% of specified value	
Condition: Applied Voltage Applied Current Applied Temperature	$U_R$ $I_R$ 85°C	$U_R$ $1,5 \times I_R$ 40°C	$U_R$ $I_R$ 85°C	$U_R$ $I_R = 0$ 85°C IEC 60384	$U_R = 0$ $I_R = 0$ 85°C	After test: $U_R$ to be applied for 30 min > 24h before measurement

**MULTIPLIER FOR RIPPLE CURRENT (FREQUENCY COEFFICIENT)**

Rated Voltage (V) \ Frequency	50Hz	120Hz	300Hz	1kHz	10kHz	≥ 50 kHz
200 ~ 250	0,87	1,00	1,17	1,32	1,45	1,50
400 ~ 500	0,80	1,00	1,16	1,30	1,41	1,45

Multipliers for typical operating conditions.

**MULTIPLIER FOR LIFETIME (LIFETIME DIAGRAM)**

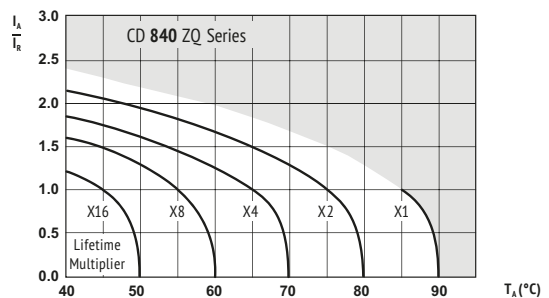

$I_A$  = actual ripple current at 120Hz,  
 $I_R$  = rated ripple current at 120Hz, 85°C  
 Multiplier of Useful Life as a function of ambient temperature & ripple current load

**!** Max. Current Snap-In Terminal: 15A. For more current use Lug-Terminals.

**ENVIRONMENTAL**

The products are RoHS, WEEE and REAcH compliant. The detailed version please see separate "Environmental Certificates" document or [www.jianghai-europe.com](http://www.jianghai-europe.com)

**! SAFETY FACTOR**

This diagram includes a safety margin. In many cases the allowed current capability/lifetime may be increased. For details and approvals please contact the Jianghai Europe sales office.

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 85°C 120Hz	Size øD x L	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 79
(V)	(µF)	(mΩ)	(mΩ)		(mA)	(Arms)	(mm)	
<b>200</b> <b>(250)</b> <b>2D</b>	330	603	423	0,15	0,7	1,59	25 x 25	ECS2DZQ331M◇◇△△2525
		511	358	0,15	0,8	1,81	25 x 30	ECS2DZQ391M◇◇△△2530
	390	511	358	0,15	0,8	1,88	30 x 25	ECS2DZQ391M◇◇△△3025
		424	297	0,15	0,9	1,99	25 x 30	ECS2DZQ471M◇◇△△2530
	470	424	297	0,15	0,9	2,06	30 x 25	ECS2DZQ471M◇◇△△3025
		356	249	0,15	1,1	2,26	25 x 35	ECS2DZQ561M◇◇△△2535
	560	356	249	0,15	1,1	2,36	30 x 30	ECS2DZQ561M◇◇△△3030
		293	205	0,15	1,4	2,58	25 x 40	ECS2DZQ681M◇◇△△2540
	680	293	205	0,15	1,4	2,60	30 x 30	ECS2DZQ681M◇◇△△3030
		293	205	0,15	1,4	2,58	35 x 25	ECS2DZQ681M◇◇△△3525
	820	243	170	0,15	1,5	2,92	25 x 45	ECS2DZQ821M◇◇△△2545
		243	170	0,15	1,5	2,97	30 x 35	ECS2DZQ821M◇◇△△3035
		243	170	0,15	1,5	3,22	35 x 30	ECS2DZQ821M◇◇△△3530
		199	140	0,15	1,5	3,32	25 x 50	ECS2DZQ102M◇◇△△2550
	1 000	199	140	0,15	1,5	3,69	30 x 40	ECS2DZQ102M◇◇△△3040
		199	140	0,15	1,5	3,70	35 x 35	ECS2DZQ102M◇◇△△3535
	1 200	166	117	0,15	1,5	4,17	30 x 45	ECS2DZQ122M◇◇△△3045
		166	117	0,15	1,5	4,05	35 x 35	ECS2DZQ122M◇◇△△3535
	1 500	133	93	0,15	1,5	4,80	30 x 50	ECS2DZQ152M◇◇△△3050
		133	93	0,15	1,5	4,69	35 x 40	ECS2DZQ152M◇◇△△3540
	1 800	111	78	0,15	1,5	5,30	35 x 45	ECS2DZQ182M◇◇△△3545
	2 200	91	63	0,15	1,5	6,17	35 x 55	ECS2DZQ222M◇◇△△3555


U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 85°C 120Hz	Size øD x L	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 79
(V)	(µF)	(mΩ)	(mΩ)		(mA)	(Arms)	(mm)	
<b>250</b> <b>(300)</b> <b>2E</b>	270	737	516	0,15	0,7	1,52	25 x 25	ECS2EZQ271M◇◇△△2525
	330	603	423	0,15	0,8	1,76	25 x 30	ECS2EZQ331M◇◇△△2530
	390	511	358	0,15	1,0	2,00	25 x 35	ECS2EZQ391M◇◇△△2535
		511	358	0,15	1,0	1,99	30 x 25	ECS2EZQ391M◇◇△△3025
	470	424	297	0,15	1,2	2,19	25 x 35	ECS2EZQ471M◇◇△△2535
		424	297	0,15	1,2	2,29	30 x 30	ECS2EZQ471M◇◇△△3030
	560	356	249	0,15	1,4	2,48	25 x 40	ECS2EZQ561M◇◇△△2540
		356	249	0,15	1,4	2,50	30 x 30	ECS2EZQ561M◇◇△△3030
	680	356	249	0,15	1,4	2,52	35 x 25	ECS2EZQ561M◇◇△△3525
		293	205	0,15	1,5	2,82	25 x 45	ECS2EZQ681M◇◇△△2545
	820	293	205	0,15	1,5	2,87	30 x 35	ECS2EZQ681M◇◇△△3035
		293	205	0,15	1,5	3,10	35 x 30	ECS2EZQ681M◇◇△△3530
	1 000	243	170	0,15	1,5	3,27	25 x 55	ECS2EZQ821M◇◇△△2555
		243	170	0,15	1,5	3,47	30 x 40	ECS2EZQ821M◇◇△△3040
	1 200	243	170	0,15	1,5	3,54	35 x 35	ECS2EZQ821M◇◇△△3535
		199	140	0,15	1,5	3,96	30 x 45	ECS2EZQ102M◇◇△△3045
	1 500	199	140	0,15	1,5	3,90	35 x 35	ECS2EZQ102M◇◇△△3535
		166	117	0,15	1,5	4,58	30 x 55	ECS2EZQ122M◇◇△△3055
	1 800	166	117	0,15	1,5	4,43	35 x 40	ECS2EZQ122M◇◇△△3540
	1 800	133	94	0,15	1,5	5,25	35 x 50	ECS2EZQ152M◇◇△△3550
	1 800	111	78	0,15	1,5	5,89	35 x 55	ECS2EZQ182M◇◇△△3555

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 85°C 120Hz	Size øD x L	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 79
(V)	(µF)	(mΩ)	(mΩ)		(mA)	(Arms)	(mm)	
<b>400</b> <b>(450)</b> <b>2G</b>	100	1990	1035	0,15	0,4	1,04	25 x 25	ECS2GZQ101M◇◇△△2525
	120	1658	863	0,15	0,5	1,19	25 x 30	ECS2GZQ121M◇◇△△2530
	150	1327	690	0,15	0,6	1,39	25 x 35	ECS2GZQ151M◇◇△△2535
		1327	690	0,15	0,6	1,39	30 x 25	ECS2GZQ151M◇◇△△3025
	180	1106	575	0,15	0,7	1,58	25 x 40	ECS2GZQ181M◇◇△△2540
		1106	575	0,15	0,7	1,59	30 x 30	ECS2GZQ181M◇◇△△3030
	220	1106	575	0,15	0,7	1,60	35 x 25	ECS2GZQ181M◇◇△△3525
		905	471	0,15	0,9	1,75	25 x 40	ECS2GZQ221M◇◇△△2540
	270	905	471	0,15	0,9	1,76	30 x 30	ECS2GZQ221M◇◇△△3030
		905	471	0,15	0,9	1,97	35 x 30	ECS2GZQ221M◇◇△△3530
	330	737	384	0,15	1,1	2,00	25 x 45	ECS2GZQ271M◇◇△△2545
		737	384	0,15	1,1	2,03	30 x 35	ECS2GZQ271M◇◇△△3035
	390	737	384	0,15	1,1	2,18	35 x 30	ECS2GZQ271M◇◇△△3530
		603	314	0,15	1,3	2,33	25 x 55	ECS2GZQ331M◇◇△△2555
	470	603	314	0,15	1,3	2,55	30 x 45	ECS2GZQ331M◇◇△△3045
		603	314	0,15	1,3	2,51	35 x 35	ECS2GZQ331M◇◇△△3535
	560	511	266	0,15	1,5	2,78	30 x 45	ECS2GZQ391M◇◇△△3045
		511	266	0,15	1,5	2,72	35 x 35	ECS2GZQ391M◇◇△△3535
	680	424	221	0,15	1,5	3,14	30 x 50	ECS2GZQ471M◇◇△△3050
		424	221	0,15	1,5	3,19	35 x 45	ECS2GZQ471M◇◇△△3545
	680	356	185	0,15	1,5	3,58	35 x 50	ECS2GZQ561M◇◇△△3550
	680	293	147	0,15	1,5	4,05	35 x 55	ECS2GZQ681M◇◇△△3555

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 85°C 120Hz	Size øD x L	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 79
(V)	(µF)	(mΩ)	(mΩ)		(mA)	(Arms)	(mm)	
<b>450</b> <b>(500)</b> <b>2W</b>	68	3901	1951	0,20	0,3	0,80	25 x 25	ECS2WZQ680M◇◇△△2525
	82	3235	1618	0,20	0,4	0,92	25 x 30	ECS2WZQ820M◇◇△△2530
	100	2653	1327	0,20	0,5	1,01	25 x 30	ECS2WZQ101M◇◇△△2530
		2653	1327	0,20	0,5	1,05	30 x 25	ECS2WZQ101M◇◇△△3025
	120	2211	1106	0,20	0,5	1,16	25 x 35	ECS2WZQ121M◇◇△△2535
		2211	1106	0,20	0,5	1,21	30 x 30	ECS2WZQ121M◇◇△△3030
	150	1769	885	0,20	0,7	1,29	25 x 35	ECS2WZQ151M◇◇△△2535
		1769	885	0,20	0,7	1,35	30 x 30	ECS2WZQ151M◇◇△△3030
	180	1769	885	0,20	0,7	1,36	35 x 25	ECS2WZQ151M◇◇△△3525
		1474	737	0,20	0,8	1,51	25 x 45	ECS2WZQ181M◇◇△△2545
	220	1474	737	0,20	0,8	1,54	30 x 35	ECS2WZQ181M◇◇△△3035
		1474	737	0,20	0,8	1,69	35 x 30	ECS2WZQ181M◇◇△△3530
	270	1206	603	0,20	1,0	1,72	25 x 50	ECS2WZQ221M◇◇△△2550
		1206	603	0,20	1,0	1,92	30 x 40	ECS2WZQ221M◇◇△△3040
	330	1206	603	0,20	1,0	1,87	35 x 30	ECS2WZQ221M◇◇△△3530
		983	492	0,20	1,2	1,96	25 x 55	ECS2WZQ271M◇◇△△2555
	390	983	492	0,20	1,2	2,12	30 x 40	ECS2WZQ271M◇◇△△3040
		983	492	0,20	1,2	2,16	35 x 35	ECS2WZQ271M◇◇△△3535
	470	804	402	0,20	1,5	2,49	30 x 50	ECS2WZQ331M◇◇△△3050
		804	402	0,20	1,5	2,47	35 x 40	ECS2WZQ331M◇◇△△3540
	560	681	341	0,20	1,5	2,78	30 x 55	ECS2WZQ391M◇◇△△3055
		681	341	0,20	1,5	2,77	35 x 45	ECS2WZQ391M◇◇△△3545
	560	565	283	0,20	1,5	3,15	35 x 50	ECS2WZQ471M◇◇△△3550
	560	474	238	0,20	1,5	3,50	35 x 55	ECS2WZQ561M◇◇△△3555

SNAP-IN



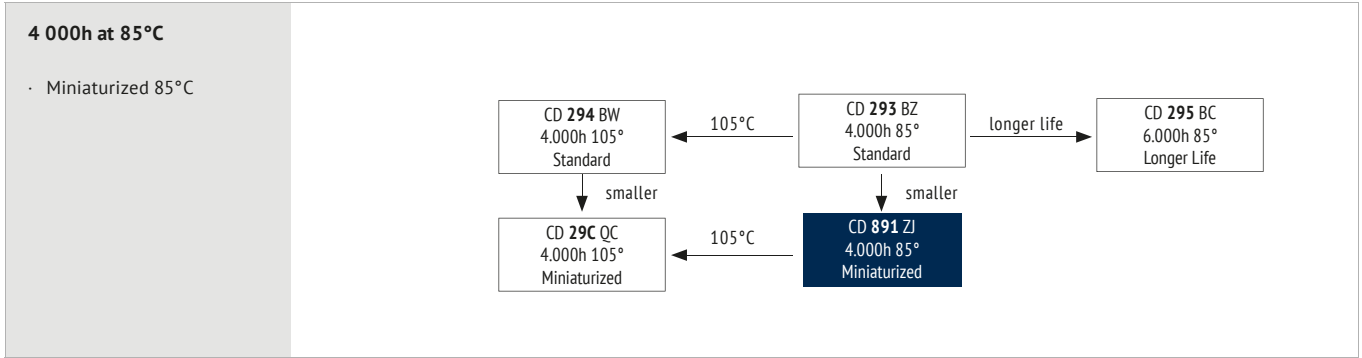

**ITEM CHARACTERISTICS**

Operating Temperature Range (°C)	-40 ~ +85	-25 ~ +85
Voltage Range (V)	35 ~ 400	420 ~ 500
Capacitance Range (µF)	68 ~ 18 000	
Capacitance Tolerance (20°C, 120Hz)	± 20%	

**!** The usage at lower temperatures than indicated may be possible. Please contact the Jianghai Europe sales office for approval.

Leakage Current: After 5 minutes at 20°C application of rated voltage, leakage current is not more than specified in table.

Stability at Low Temperature (Impedance Ratio at 120Hz)	Rated Voltage (V)	35	50~100	160~200	250~400	420~500
	Z <sub>-25°C</sub> / Z <sub>+20°C</sub>		4	3	4	-
Z <sub>-40°C</sub> / Z <sub>+20°C</sub>		15	10	6	8	-

Fast Charge-Discharge: **!** Please contact Jianghai for an appropriate choice of the capacitor or possible technical adaptations, esp. for applications like: Welding, Photoflash, Servo motors, X-Ray


ITEM	USEFUL LIFE		LOAD LIFE	ENDURANCE TEST	SHELF LIFE	
Lifetime	4 000h	> 65 000h	2 000h	3 000h	1 000h	
Leakage Current	Not more than specified value		Not more than specified value	Not more than specified value	Not more than specified value	
Capacitance Change	Within ± 30% of initial value		Within ± 15% of initial value	Within ± 20% of initial value	Within ± 15% of initial value	
Dissipation Factor	Not more than 300% of specified value		Not more than 150% of specified value	Not more than 200% of specified value	Not more than 150% of specified value	
Condition:						
Applied Voltage	U <sub>R</sub>	U <sub>R</sub>	U <sub>R</sub>	U <sub>R</sub>	U <sub>R</sub> = 0	After test: U <sub>R</sub> to be applied for 30 min > 24h before measurement
Applied Current	I <sub>R</sub>	1,2 x I <sub>R</sub>	I <sub>R</sub>	I <sub>R</sub> = 0	I <sub>R</sub> = 0	
Applied Temperature	85°C	40°C	85°C	85°C IEC 60384	85°C	

**MULTIPLIER FOR RIPPLE CURRENT (FREQUENCY COEFFICIENT)**

Rated Voltage (V) \ Frequency	50Hz	120Hz	300Hz	1kHz	10kHz	100kHz
≤ 50	0,88	1,00	1,07	1,15	1,15	1,15
63 ~ 100	0,80	1,00	1,17	1,32	1,45	1,50
≥ 160	0,80	1,00	1,16	1,30	1,41	1,43

Multipliers for typical operating conditions.

**MULTIPLIER FOR LIFETIME (LIFETIME DIAGRAM)**

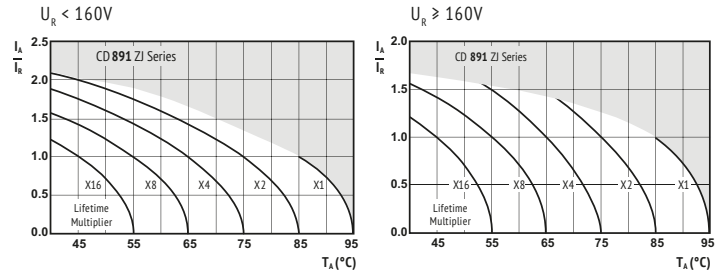

I<sub>A</sub> = actual ripple current at 120Hz,  
I<sub>R</sub> = rated ripple current at 120Hz, 85°C  
Multiplier of Useful Life as a function of ambient temperature & ripple current load

I<sub>A</sub> = actual ripple current at 120Hz,  
I<sub>R</sub> = rated ripple current at 120Hz, 85°C  
Multiplier of Useful Life as a function of ambient temperature & ripple current load

**!** Max. Current Snap-In Terminal: 15A. For more current use Lug-Terminals.

**ENVIRONMENTAL**

The products are RoHS, WEEE and REAcH compliant. The detailed version please see separate "Environmental Certificates" document or [www.jianghai-europe.com](http://www.jianghai-europe.com)

**! SAFETY FACTOR**

This diagram includes a safety margin. In many cases the allowed current capability/lifetime may be increased. For details and approvals please contact the Jianghai Europe sales office.

SNAP-IN

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 85°C 120Hz	Size øD x L (mm)	ORDER CODE Details: Page 79 ♦♦ = pin style & length ΔΔ = pin number
35 (44) 1V	4 700	71	57	0,25	1,5	2,2	22 x 30	ECS1VZJ472M♦♦ΔΔ2230
	5 600	72	60	0,30	1,5	2,3	22 x 30	ECS1VZJ562M♦♦ΔΔ2230
	6 800	59	47	0,30	1,5	2,6	25 x 30	ECS1VZJ682M♦♦ΔΔ2530
		47	38	0,35	1,5	3,0	25 x 35	ECS1VZJ103M♦♦ΔΔ2535
	10 000	47	38	0,35	1,5	3,2	30 x 30	ECS1VZJ103M♦♦ΔΔ3030
		47	38	0,35	1,5	3,3	35 x 20	ECS1VZJ103M♦♦ΔΔ3520
	12 000	39	30	0,35	1,5	3,6	35 x 25	ECS1VZJ123M♦♦ΔΔ3525
	15 000	31	25	0,35	1,5	3,3	30 x 35	ECS1VZJ153M♦♦ΔΔ3035
18 000	26	21	0,35	1,5	4,7	40 x 30	ECS1VZJ183M♦♦ΔΔ4030	

50 (63) 1H	2 200	121	97	0,20	1,1	1,6	20 x 25	ECS1HZJ222M♦♦ΔΔ2025
	3 300	101	81	0,25	1,5	2,0	22 x 30	ECS1HZJ332M♦♦ΔΔ2230
		101	81	0,25	1,5	2,0	25 x 25	ECS1HZJ332M♦♦ΔΔ2525
	4 700	71	57	0,25	1,5	3,0	25 x 30	ECS1HZJ472M♦♦ΔΔ2530
		71	57	0,25	1,5	2,8	30 x 25	ECS1HZJ472M♦♦ΔΔ3025
	10 000	47	38	0,35	1,5	3,2	25 x 50	ECS1HZJ103M♦♦ΔΔ2550
47		38	0,35	1,5	3,0	30 x 40	ECS1HZJ103M♦♦ΔΔ3040	
	47	38	0,35	1,5	4,0	30 x 45	ECS1HZJ103M♦♦ΔΔ3045	

63 (79) 1J	3 300	81	65	0,20	1,5	2,6	25 x 30	ECS1JZJ332M♦♦ΔΔ2530
		81	65	0,20	1,5	3,0	30 x 25	ECS1JZJ332M♦♦ΔΔ3025
	4 700	57	46	0,20	1,5	2,6	22 x 50	ECS1JZJ472M♦♦ΔΔ2250
		57	46	0,20	1,5	2,6	25 x 35	ECS1JZJ472M♦♦ΔΔ2535
	5 600	48	38	0,20	1,5	2,7	25 x 40	ECS1JZJ562M♦♦ΔΔ2540
		40	32	0,20	1,5	2,9	25 x 50	ECS1JZJ682M♦♦ΔΔ2550
	6 800	40	32	0,20	1,5	3,4	30 x 35	ECS1JZJ682M♦♦ΔΔ3035
		41	33	0,25	1,5	3,5	35 x 35	ECS1JZJ822M♦♦ΔΔ3535
	10 000	34	27	0,25	1,5	4,3	30 x 45	ECS1JZJ103M♦♦ΔΔ3045
		34	27	0,25	1,5	4,0	35 x 40	ECS1JZJ103M♦♦ΔΔ3540
	12 000	28	23	0,25	1,5	6,7	35 x 45	ECS1JZJ123M♦♦ΔΔ3545
	15 000	23	18	0,25	1,5	4,4	35 x 50	ECS1JZJ153M♦♦ΔΔ3550

80 (100) 1K	1 800	111	89	0,15	1,4	1,9	22 x 30	ECS1KZJ182M♦♦ΔΔ2230
	2 200	91	75	0,15	1,5	2,0	25 x 30	ECS1KZJ222M♦♦ΔΔ2530
	2 700	74	59	0,15	1,5	2,6	25 x 35	ECS1KZJ272M♦♦ΔΔ2535
	3 300	61	49	0,15	1,5	2,7	22 x 45	ECS1KZJ332M♦♦ΔΔ2245
	4 700	43	34	0,15	1,5	3,3	25 x 55	ECS1KZJ472M♦♦ΔΔ2555
	8 200	41	25	0,25	1,5	4,2	35 x 50	ECS1KZJ822M♦♦ΔΔ3550
	10 000	34	22	0,25	1,5	4,5	35 x 50	ECS1KZJ103M♦♦ΔΔ3550

100 (125) 2A	1 000	199	160	0,15	1,0	1,5	22 x 30	ECS2AZJ102M♦♦ΔΔ2230
	1 200	166	133	0,15	1,2	1,8	22 x 30	ECS2AZJ122M♦♦ΔΔ2230
		91	73	0,15	1,5	2,2	22 x 55	ECS2AZJ222M♦♦ΔΔ2255
	2 200	91	73	0,15	1,5	2,2	25 x 40	ECS2AZJ222M♦♦ΔΔ2540
		91	73	0,15	1,5	2,2	30 x 30	ECS2AZJ222M♦♦ΔΔ3030
	4 700	43	34	0,15	1,5	3,4	30 x 50	ECS2AZJ472M♦♦ΔΔ3050

200 (250) 2D	120	1106	800	0,10	0,2	1,0	22 x 25	ECS2DZJ121M♦♦ΔΔ2225
		470	283	226	0,10	0,9	1,7	25 x 30
	560	237	190	0,10	1,1	2,0	30 x 25	ECS2DZJ561M♦♦ΔΔ3025
		196	157	0,10	1,4	1,9	22 x 35	ECS2DZJ681M♦♦ΔΔ2235
	680	196	157	0,10	1,4	2,3	22 x 45	ECS2DZJ681M♦♦ΔΔ2245
		196	157	0,10	1,4	2,3	25 x 30	ECS2DZJ681M♦♦ΔΔ2530
	820	162	135	0,10	1,5	2,2	22 x 40	ECS2DZJ821M♦♦ΔΔ2240
	1 000	133	128	0,10	1,5	2,6	25 x 40	ECS2DZJ102M♦♦ΔΔ2540
		133	128	0,10	1,5	3,1	30 x 40	ECS2DZJ102M♦♦ΔΔ3040
	1 500	120	108	0,10	1,5	3,7	25 x 50	ECS2DZJ152M♦♦ΔΔ2550
		120	108	0,10	1,5	3,8	30 x 50	ECS2DZJ152M♦♦ΔΔ3050
	1 800	120	108	0,12	1,5	3,8	35 x 40	ECS2DZJ182M♦♦ΔΔ3540
		120	108	0,12	1,5	4,0	35 x 45	ECS2DZJ182M♦♦ΔΔ3545
	2 200	90	80	0,12	1,5	4,5	35 x 45	ECS2DZJ222M♦♦ΔΔ3545
	2 700	85	70	0,12	1,5	4,0	35 x 55	ECS2DZJ272M♦♦ΔΔ3555
	3 300	70	50	0,12	1,5	4,2	35 x 60	ECS2DZJ332M♦♦ΔΔ3560

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 85°C 120Hz	Size øD x L (mm)	ORDER CODE Details: Page 79 ♦♦ = pin style & length ΔΔ = pin number
250 (300) 2E	220	905	724	0,15	0,6	1,0	22 x 25	ECS2EZJ221M♦♦ΔΔ2225
	330	603	483	0,15	0,8	1,3	22 x 30	ECS2EZJ331M♦♦ΔΔ2230
		293	135	0,15	1,5	2,3	25 x 50	ECS2EZJ681M♦♦ΔΔ2550
	680	293	135	0,15	1,5	2,3	30 x 30	ECS2EZJ681M♦♦ΔΔ3030
		1 000	199	160	0,15	1,5	3,0	30 x 40
	1 500	133	110	0,15	1,5	3,8	30 x 50	ECS2EZJ152M♦♦ΔΔ3050
	1 800	111	90	0,15	1,5	4,4	35 x 45	ECS2EZJ182M♦♦ΔΔ3545
	2 200	91	75	0,15	1,5	4,6	35 x 50	ECS2EZJ222M♦♦ΔΔ3550
		91	75	0,15	1,5	5,0	40 x 60	ECS2EZJ222M♦♦ΔΔ4060


350 (400) 2V	820	243	198	0,15	1,5	2,0	35 x 50	ECS2VZJ821M♦♦ΔΔ3550
	1 500	133	110	0,15	1,5	5,0	40 x 60	ECS2VZJ152M♦♦ΔΔ4060
	1 800	111	90	0,15	1,5	6,5	40 x 100	ECS2VZJ182M♦♦ΔΔ40100
	2 200	91	75	0,15	1,5	7,2	40 x 100	ECS2VZJ222M♦♦ΔΔ40100

400 (450) 2G	68	2926	2341	0,15	0,3	0,6	22 x 20	ECS2GZJ680M♦♦ΔΔ2220
		1990	1592	0,15	0,4	0,7	25 x 20	ECS2GZJ101M♦♦ΔΔ2520
	100	1990	1592	0,15	0,4	0,9	25 x 25	ECS2GZJ101M♦♦ΔΔ2525
		120	1658	1327	0,15	0,5	0,9	25 x 25
	150	1327	1062	0,15	0,6	0,9	22 x 30	ECS2GZJ151M♦♦ΔΔ2230
		905	724	0,15	0,9	1,2	25 x 35	ECS2GZJ221M♦♦ΔΔ2535
	220	905	724	0,15	0,9	1,1	30 x 30	ECS2GZJ221M♦♦ΔΔ3030
		905	724	0,15	0,9	1,5	30 x 35	ECS2GZJ221M♦♦ΔΔ3035
	270	737	590	0,15	1,1	1,3	25 x 40	ECS2GZJ271M♦♦ΔΔ2540
		603	483	0,15	1,3	1,6	22 x 50	ECS2GZJ331M♦♦ΔΔ2250
	330	603	483	0,15	1,3	1,8	30 x 40	ECS2GZJ331M♦♦ΔΔ3040
		603	483	0,15	1,3	1,6	35 x 25	ECS2GZJ331M♦♦ΔΔ3525
	390	511	409	0,15	1,5	2,1	25 x 45	ECS2GZJ391M♦♦ΔΔ2545
		511	409	0,15	1,5	1,8	30 x 40	ECS2GZJ391M♦♦ΔΔ3040
		511	409	0,15	1,5	2,0	30 x 45	ECS2GZJ391M♦♦ΔΔ3045
		511	409	0,15	1,5	1,8	35 x 30	ECS2GZJ391M♦♦ΔΔ3530
	470	424	339	0,15	1,5	1,8	30 x 45	ECS2GZJ471M♦♦ΔΔ3045
		424	339	0,15	1,5	2,4	30 x 50	ECS2GZJ471M♦♦ΔΔ3050
		424	339	0,15	1,5	2,1	35 x 30	ECS2GZJ471M♦♦ΔΔ3530
		424	339	0,15	1,5	2,5	35 x 35	ECS2GZJ471M♦♦ΔΔ3535
	560	356	285	0,15	1,5	2,0	30 x 50	ECS2GZJ561M♦♦ΔΔ3050
		356	285	0,15	1,5	2,3	35 x 35	ECS2GZJ561M♦♦ΔΔ3535
		356	285	0,15	1,5	2,7	35 x 40	ECS2GZJ561M♦♦ΔΔ3540
	680	293	240	0,15	1,5	2,5	30 x 50	ECS2GZJ681M♦♦ΔΔ3050
		293	240	0,15	1,5	2,7	30 x 55	ECS2GZJ681M♦♦ΔΔ3055
		293	240	0,15	1,5	2,5	35 x 40	ECS2GZJ681M♦♦ΔΔ3540
		293	240	0,15	1,5	3,0	35 x 50	ECS2GZJ681M♦♦ΔΔ3550
	820	293	240	0,15	1,5	3,9	40 x 60	ECS2GZJ681M♦♦ΔΔ4060
		243	200	0,15	1,5	2,7	30 x 70	ECS2GZJ821M♦♦ΔΔ3070
		243	200	0,15	1,5	2,6	35 x 50	ECS2GZJ821M♦♦ΔΔ3550
	1 000	199	160	0,15	1,5	3,3	35 x 50	ECS2GZJ102M♦♦ΔΔ3550
		199	160	0,15	1,5	4,7	35 x 60	ECS2GZJ102M♦♦ΔΔ3560
199		160	0,15	1,5	3,6	40 x 55	ECS2GZJ102M♦♦ΔΔ4055	
199		160	0,15	1,5	5,0	40 x 80	ECS2GZJ102M♦♦ΔΔ4080	
1 200		166	135	0,15	1,5	3,5	35 x 80	ECS2GZJ122M♦♦ΔΔ3580
1 500	133	120	0,15	1,5	6,5	40 x 80	ECS2GZJ152M♦♦ΔΔ4080	
2 700	74	50	0,15	1,5	11,0	50 x 105	ECS2GZJ272M♦♦ΔΔ50105	

420 (470) 2X	100	1990	1592	0,15	0,4	0,7	22 x 35	ECS2XZJ101M♦♦ΔΔ2235
		1990	1592	0,15	0,4	0,7	25 x 30	ECS2XZJ101M♦♦ΔΔ2530
	150	1327	1062	0,15	0,6	1,2	25 x 30	ECS2XZJ151M♦♦ΔΔ2530
		1106	885	0,15	0,8	1,0	25 x 40	ECS2XZJ181M♦♦ΔΔ2540
	180	1106	885	0,15	0,8	1,0	30 x 35	ECS2XZJ181M♦♦ΔΔ3035
		1106	885	0,15	0,8	1,0	35 x 25	ECS2XZJ181M♦♦ΔΔ3525
	220	905	724	0,15	0,9	1,1	25 x 45	ECS2XZJ221M♦♦ΔΔ2545
		905	724	0,15	0,9	1,1	30 x 40	ECS2XZJ221M♦♦ΔΔ3040
	270	905	724	0,15	0,9	1,1	35 x 30	ECS2XZJ221M♦♦ΔΔ3530
		737	590	0,15	1,1			

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance (µF)	ESR <sub>max</sub>	ESR <sub>typ</sub>	tanδ	I <sub>leak</sub> Leakage Current (mA)	I <sub>RAC</sub> Rated Ripple Current 85°C 120Hz (Arms)	Size øD x L (mm)	ORDER CODE
		Equivalent Series Resistance 20°C 120Hz (mΩ)	Equivalent Series Resistance 20°C 120Hz (mΩ)					
<b>420</b> (470) 2X	470	424	339	0,15	1,5	2,1	30 x 50	ECS2XZJ471M◇◇△△3050
		424	339	0,15	1,5	2,1	35 x 45	ECS2XZJ471M◇◇△△3545
	560	356	285	0,15	1,5	2,5	35 x 45	ECS2XZJ561M◇◇△△3545
	680	293	235	0,15	1,5	2,5	35 x 50	ECS2XZJ681M◇◇△△3550
	820	243	194	0,15	1,5	3,2	35 x 50	ECS2XZJ821M◇◇△△3550
	1 000	199	160	0,15	1,5	3,2	35 x 70	ECS2XZJ102M◇◇△△3570
	1 500	133	120	0,15	1,5	6,5	40 x 100	ECS2XZJ152M◇◇△△40100
<b>450</b> (500) 2W	100	1990	1592	0,15	0,5	0,7	22 x 30	ECS2WZJ101M◇◇△△2230
	120	1658	1350	0,15	0,5	0,8	22 x 35	ECS2WZJ121M◇◇△△2235
	150	1327	1062	0,15	0,7	1,2	22 x 30	ECS2WZJ151M◇◇△△2230
		1327	1062	0,15	0,7	0,9	25 x 35	ECS2WZJ151M◇◇△△2535
	220	1327	1062	0,15	0,7	0,95	30 x 25	ECS2WZJ151M◇◇△△3025
		905	724	0,15	1,0	1,1	22 x 40	ECS2WZJ221M◇◇△△2240
		905	724	0,15	1,0	1,1	25 x 45	ECS2WZJ221M◇◇△△2545
		905	724	0,15	1,0	1,3	30 x 25	ECS2WZJ221M◇◇△△3025
		905	724	0,15	1,0	1,3	30 x 30	ECS2WZJ221M◇◇△△3030
		905	724	0,15	1,0	1,3	35 x 20	ECS2WZJ271M◇◇△△3520
		905	724	0,15	1,0	1,3	35 x 30	ECS2WZJ271M◇◇△△3530
	330	603	483	0,15	1,5	1,6	25 x 60	ECS2WZJ331M◇◇△△2560
		603	483	0,15	1,5	1,7	30 x 35	ECS2WZJ331M◇◇△△3035
		603	483	0,15	1,5	1,8	35 x 35	ECS2WZJ331M◇◇△△3535
	390	511	409	0,15	1,5	1,8	25 x 55	ECS2WZJ391M◇◇△△2555
		511	409	0,15	1,5	1,8	30 x 45	ECS2WZJ391M◇◇△△3045
		511	409	0,15	1,5	1,7	35 x 35	ECS2WZJ391M◇◇△△3535
		511	409	0,15	1,5	1,9	35 x 40	ECS2WZJ391M◇◇△△3540
	470	424	339	0,15	1,5	2,2	30 x 50	ECS2WZJ471M◇◇△△3050
		424	339	0,15	1,5	2,4	35 x 40	ECS2WZJ471M◇◇△△3540
	560	356	285	0,15	1,5	3,0	30 x 55	ECS2WZJ561M◇◇△△3055
		356	285	0,15	1,5	2,3	35 x 50	ECS2WZJ561M◇◇△△3550
	680	293	234	0,15	1,5	2,3	35 x 50	ECS2WZJ681M◇◇△△3550
	820	243	195	0,15	1,5	3,6	35 x 55	ECS2WZJ821M◇◇△△3555
	1 000	199	160	0,15	1,5	4,2	35 x 55	ECS2WZJ102M◇◇△△3555
		199	160	0,15	1,5	4,5	35 x 75	ECS2WZJ102M◇◇△△3575
		199	160	0,15	1,5	5,0	40 x 70	ECS2WZJ102M◇◇△△4070
1 200	166	135	0,15	1,5	4,6	35 x 60	ECS2WZJ122M◇◇△△3560	
	166	135	0,15	1,5	5,0	40 x 100	ECS2WZJ122M◇◇△△40100	
1 500	133	120	0,15	1,5	6,4	40 x 100	ECS2WZJ152M◇◇△△40100	
	133	120	0,15	1,5	6,7	45 x 75	ECS2WZJ152M◇◇△△4575	
1 800	111	100	0,15	1,5	5,9	45 x 100	ECS2WZJ182M◇◇△△45100	
2 200	91	75	0,15	1,5	7,0	45 x 100	ECS2WZJ222M◇◇△△45100	
2 700	74	50	0,15	1,5	10,0	55 x 105	ECS2WZJ272M◇◇△△55105	
<b>500</b> (550) 2H	470	424	340	0,15	1,5	2,3	35 x 55	ECS2HZJ471M◇◇△△3555
	560	356	320	0,15	1,5	2,4	35 x 60	ECS2HZJ561M◇◇△△3560
	680	293	234	0,15	1,5	2,5	35 x 70	ECS2HZJ681M◇◇△△3570



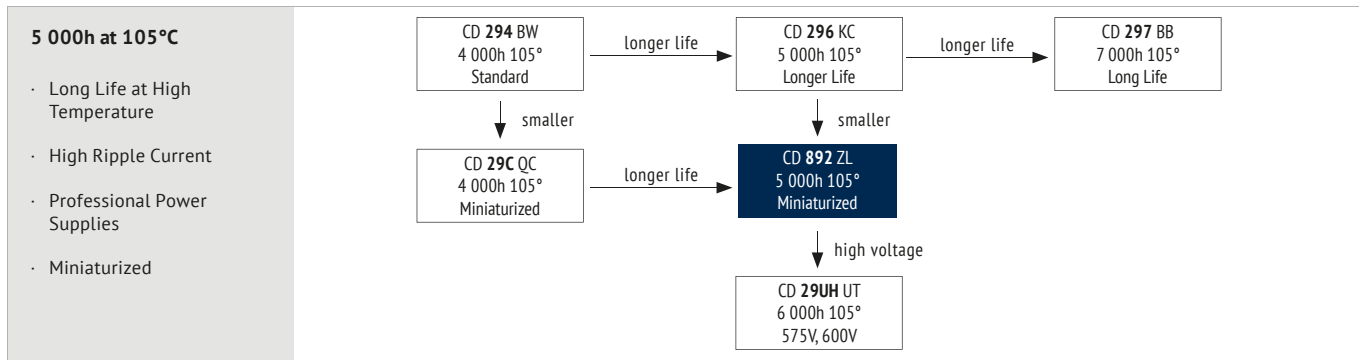

**ITEM CHARACTERISTICS**

Operating Temperature Range (°C)	-25 ~ +105
Voltage Range (V)	400 ~ 500
Capacitance Range (µF)	47 ~ 18 000
Capacitance Tolerance (20°C, 120Hz)	± 20%

**!** The usage at lower temperatures than indicated may be possible. Please contact the Jianghai Europe sales office for approval.

Leakage Current: After 5 minutes at 20°C application of rated voltage, leakage current is not more than specified in table.

Stability at Low Temperature (Impedance Ratio at 120Hz)	Rated Voltage (V)	400 ~ 500
	$Z_{-25°C} / Z_{+20°C}$	4

Fast Charge-Discharge: **!** Please contact Jianghai for an appropriate choice of the capacitor or possible technical adaptations, esp. for applications like: Welding, Photoflash, Servo motors, X-Ray


ITEM	USEFUL LIFE		LOAD LIFE	ENDURANCE TEST	SHELF LIFE	
Lifetime	5 000h	> 200 000h	3 000h	4 000h	1 000h	
Leakage Current	Not more than specified value		Not more than specified value	Not more than specified value	Not more than specified value	
Capacitance Change	Within ± 30% of initial value		Within ± 20% of initial value	Within ± 20% of initial value	Within ± 20% of initial value	
Dissipation Factor	Not more than 300% of specified value		Not more than 200% of specified value	Not more than 200% of specified value	Not more than 200% of specified value	
Condition: Applied Voltage Applied Current Applied Temperature	$U_R$ $I_R$ 105°C	$U_R$ $1,4 \times I_R$ 40°C	$U_R$ $I_R$ 105°C	$U_R$ $I_R = 0$ 105°C IEC 60384	$U_R = 0$ $I_R = 0$ 105°C	After test: $U_R$ to be applied for 30 min > 24h before measurement

**MULTIPLIER FOR RIPPLE CURRENT (FREQUENCY COEFFICIENT)**

Frequency	50Hz	120Hz	300Hz	1kHz	10kHz	≥ 50 kHz
Coefficient	0,80	1,00	1,16	1,30	1,41	1,43

Multipliers for typical operating conditions.

**MULTIPLIER FOR LIFETIME (LIFETIME DIAGRAM)**

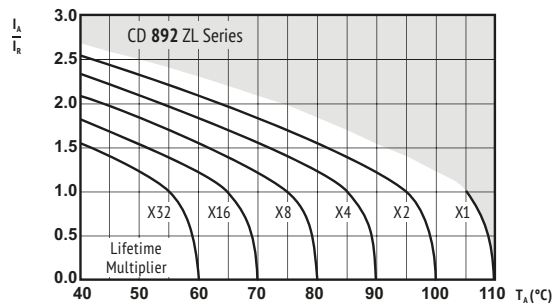

$I_A$  = actual ripple current at 120Hz,  
 $I_R$  = rated ripple current at 120Hz, 105°C  
 Multiplier of Useful Life as a function of ambient temperature & ripple current load

**!** Max. Current Snap-In Terminal: 15A. For more current use Lug-Terminals.

**ENVIRONMENTAL**

The products are RoHS, WEEE and REACH compliant. The detailed version please see separate "Environmental Certificates" document or [www.jianghai-europe.com](http://www.jianghai-europe.com)

**! SAFETY FACTOR**

This diagram includes a safety margin. In many cases the allowed current capability/lifetime may be increased. For details and approvals please contact the Jianghai Europe sales office.

SNAP-IN




U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 105°C 105°C	Size øD x L (mm)	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 79
<b>400</b> <b>(450)</b> <b>2G</b>	47	4233	2350	0,15	0,2	0,39	22 x 20	ECS2GZL470M◇◇△△2220
	82	2427	1340	0,15	0,3	0,56	22 x 25	ECS2GZL820M◇◇△△2225
	100	1990	1035	0,15	0,4	0,65	22 x 25	ECS2GZL101M◇◇△△2225
		1990	1035	0,15	0,4	0,70	22 x 30	ECS2GZL101M◇◇△△2230
		1990	1035	0,15	0,4	0,58	25 x 25	ECS2GZL101M◇◇△△2525
		1990	1035	0,15	0,4	0,72	25 x 30	ECS2GZL101M◇◇△△2530
	150	1327	690	0,15	0,6	0,88	25 x 30	ECS2GZL151M◇◇△△2530
		1106	575	0,15	0,7	0,70	22 x 45	ECS2GZL181M◇◇△△2245
		1106	575	0,15	0,7	0,95	22 x 50	ECS2GZL181M◇◇△△2250
		1106	575	0,15	0,7	0,82	25 x 35	ECS2GZL181M◇◇△△2535
	220	1106	575	0,15	0,7	0,78	35 x 20	ECS2GZL181M◇◇△△3520
		905	471	0,15	0,9	1,00	25 x 45	ECS2GZL221M◇◇△△2545
		905	471	0,15	0,9	0,86	30 x 30	ECS2GZL221M◇◇△△3030
		905	471	0,15	0,9	1,10	35 x 25	ECS2GZL221M◇◇△△3525
	270	905	471	0,15	0,9	1,30	35 x 30	ECS2GZL221M◇◇△△3530
		737	385	0,15	1,1	1,35	25 x 45	ECS2GZL271M◇◇△△2545
		737	385	0,15	1,1	1,48	30 x 30	ECS2GZL271M◇◇△△3030
		737	385	0,15	1,1	1,58	30 x 40	ECS2GZL271M◇◇△△3040
	330	603	314	0,15	1,3	1,50	25 x 50	ECS2GZL331M◇◇△△2550
		603	314	0,15	1,3	1,11	30 x 40	ECS2GZL331M◇◇△△3040
		603	314	0,15	1,3	1,10	35 x 30	ECS2GZL331M◇◇△△3530
		603	314	0,15	1,3	1,70	35 x 40	ECS2GZL331M◇◇△△3540
	390	511	266	0,15	1,5	1,15	30 x 45	ECS2GZL391M◇◇△△3045
		511	266	0,15	1,5	1,26	35 x 35	ECS2GZL391M◇◇△△3535
	470	424	221	0,15	1,5	1,31	30 x 50	ECS2GZL471M◇◇△△3050
		424	221	0,15	1,5	1,50	35 x 35	ECS2GZL471M◇◇△△3535
		424	221	0,15	1,5	2,30	35 x 40	ECS2GZL471M◇◇△△3540
		424	221	0,15	1,5	1,65	40 x 40	ECS2GZL471M◇◇△△4040
	560	424	221	0,15	1,5	3,30	45 x 50	ECS2GZL471M◇◇△△4550
		356	185	0,15	1,5	1,90	30 x 45	ECS2GZL561M◇◇△△3045
	680	356	185	0,15	1,5	1,75	35 x 45	ECS2GZL561M◇◇△△3545
		293	153	0,15	1,5	2,20	30 x 55	ECS2GZL681M◇◇△△3055
		293	153	0,15	1,5	2,10	35 x 45	ECS2GZL681M◇◇△△3545
		293	153	0,15	1,5	2,50	35 x 50	ECS2GZL681M◇◇△△3550
	820	293	153	0,15	1,5	2,15	40 x 40	ECS2GZL681M◇◇△△4040
		243	145	0,15	1,5	3,50	35 x 55	ECS2GZL821M◇◇△△3555
	1 000	199	130	0,15	1,5	2,80	35 x 55	ECS2GZL102M◇◇△△3555
		199	130	0,15	1,5	3,30	35 x 100	ECS2GZL102M◇◇△△35100
		199	130	0,15	1,5	3,50	40 x 70	ECS2GZL102M◇◇△△4070
		199	130	0,15	1,5	3,80	40 x 80	ECS2GZL102M◇◇△△4080
1 200	166	108	0,15	1,5	3,80	35 x 80	ECS2GZL122M◇◇△△3580	
	166	108	0,15	1,5	4,50	35 x 100	ECS2GZL122M◇◇△△35100	
1 500	166	108	0,15	1,5	4,50	40 x 75	ECS2GZL122M◇◇△△4075	
	133	90	0,15	1,5	4,25	40 x 100	ECS2GZL152M◇◇△△40100	
1 800	111	72	0,15	1,5	6,10	40 x 100	ECS2GZL182M◇◇△△40100	

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 105°C 105°C	Size øD x L (mm)	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 79
<b>420</b> <b>(470)</b> <b>2X</b>	100	2653	1300	0,20	0,4	0,70	22 x 30	ECS2XZL101M◇◇△△2230
		2653	1300	0,20	0,4	0,60	25 x 25	ECS2XZL101M◇◇△△2525
	120	2653	1300	0,20	0,4	0,60	30 x 20	ECS2XZL101M◇◇△△3020
		2211	1100	0,20	0,5	0,71	25 x 30	ECS2XZL121M◇◇△△2530
	150	1769	890	0,20	0,6	0,78	22 x 40	ECS2XZL151M◇◇△△2240
		1769	890	0,20	0,6	0,72	25 x 35	ECS2XZL151M◇◇△△2535
		1769	890	0,20	0,6	0,72	30 x 25	ECS2XZL151M◇◇△△3025
		1769	890	0,20	0,6	0,72	35 x 30	ECS2XZL151M◇◇△△3530
	180	1474	737	0,20	0,8	0,81	25 x 30	ECS2XZL181M◇◇△△2530
		1206	603	0,20	0,9	0,90	25 x 40	ECS2XZL221M◇◇△△2540
	220	1206	603	0,20	0,9	0,85	30 x 35	ECS2XZL221M◇◇△△3035
		1206	603	0,20	0,9	0,85	35 x 25	ECS2XZL221M◇◇△△3525
	270	983	492	0,20	1,1	0,90	25 x 45	ECS2XZL271M◇◇△△2545
		983	492	0,20	1,1	1,10	25 x 50	ECS2XZL271M◇◇△△2550
	330	804	402	0,20	1,4	1,20	30 x 45	ECS2XZL331M◇◇△△3045
		804	402	0,20	1,4	1,20	35 x 35	ECS2XZL331M◇◇△△3535
	390	681	340	0,20	1,5	1,30	30 x 50	ECS2XZL391M◇◇△△3050
		565	282	0,20	1,5	1,60	30 x 55	ECS2XZL471M◇◇△△3055
	470	565	282	0,20	1,5	1,40	35 x 45	ECS2XZL471M◇◇△△3545
		474	237	0,20	1,5	1,70	30 x 60	ECS2XZL561M◇◇△△3060
560	474	237	0,20	1,5	1,80	35 x 55	ECS2XZL561M◇◇△△3555	
	391	196	0,20	1,5	2,50	35 x 50	ECS2XZL681M◇◇△△3550	
680	391	196	0,20	1,5	3,30	35 x 55	ECS2XZL681M◇◇△△3555	

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 105°C 105°C	Size øD x L (mm)	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 79
<b>450</b> <b>(500)</b> <b>2W</b>	47	5644	2890	0,20	0,2	0,35	20 x 25	ECS2WZL470M◇◇△△2025
		5644	2890	0,20	0,2	0,42	22 x 25	ECS2WZL470M◇◇△△2225
	68	3901	1951	0,20	0,3	0,55	22 x 25	ECS2WZL680M◇◇△△2225
		3235	1618	0,20	0,4	0,50	22 x 25	ECS2WZL820M◇◇△△2225
	82	2653	1327	0,20	0,5	0,60	22 x 30	ECS2WZL101M◇◇△△2230
		2653	1327	0,20	0,5	0,64	22 x 35	ECS2WZL101M◇◇△△2235
		2653	1327	0,20	0,5	0,70	25 x 25	ECS2WZL101M◇◇△△2525
		2653	1327	0,20	0,5	0,80	25 x 30	ECS2WZL101M◇◇△△2530
	100	2211	1106	0,20	0,5	1,00	22 x 35	ECS2WZL121M◇◇△△2235
		2211	1106	0,20	0,5	0,70	25 x 30	ECS2WZL121M◇◇△△2530
	120	2211	1106	0,20	0,5	0,70	30 x 25	ECS2WZL121M◇◇△△3025
		1769	885	0,20	0,7	0,90	22 x 30	ECS2WZL151M◇◇△△2230
	150	1769	885	0,20	0,7	0,80	25 x 30	ECS2WZL151M◇◇△△2530
		1769	885	0,20	0,7	0,73	30 x 25	ECS2WZL151M◇◇△△3025
	180	1474	737	0,20	0,8	1,00	22 x 40	ECS2WZL181M◇◇△△2240
		1474	737	0,20	0,8	1,00	30 x 30	ECS2WZL181M◇◇△△3030
	220	1474	737	0,20	0,8	1,00	35 x 25	ECS2WZL181M◇◇△△3525
		1206	603	0,20	1,0	1,10	25 x 40	ECS2WZL221M◇◇△△2540
	270	1206	603	0,20	1,0	1,10	30 x 30	ECS2WZL221M◇◇△△3030
		983	492	0,20	1,2	0,97	25 x 50	ECS2WZL271M◇◇△△2550
	330	983	492	0,20	1,2	0,97	30 x 40	ECS2WZL271M◇◇△△3040
		983	492	0,20	1,2	1,30	30 x 60	ECS2WZL271M◇◇△△3060
	390	983	492	0,20	1,2	1,50	35 x 30	ECS2WZL271M◇◇△△3530
		804	402	0,20	1,5	1,30	25 x 55	ECS2WZL331M◇◇△△2555
	470	804	402	0,20	1,5	1,10	30 x 45	ECS2WZL331M◇◇△△3045
		804	402	0,20	1,5	1,18	35 x 30	ECS2WZL331M◇◇△△3530
	560	804	402	0,20	1,5	1,80	35 x 35	ECS2WZL331M◇◇△△3535
		681	340	0,20	1,5	1,31	30 x 45	ECS2WZL391M◇◇△△3045
	680	681	340	0,20	1,5	1,70	35 x 35	ECS2WZL391M◇◇△△3535
		681	340	0,20	1,5	2,00	35 x 40	ECS2WZL391M◇◇△△3540
	820	565	282	0,20	1,5	2,00	30 x 50	ECS2WZL471M◇◇△△3050
		565	282	0,20	1,5	1,60	35 x 40	ECS2WZL471M◇◇△△3540
	1 000	565	282	0,20	1,5	2,00	35 x 45	ECS2WZL471M◇◇△△3545
		565	282	0,20	1,5	2,20	35 x 50	ECS2WZL471M◇◇△△3550
	1 200	565	282	0,20	1,5	1,50	40 x 40	ECS2WZL471M◇◇△△4040
		474	237	0,20	1,5	2,10	35 x 50	ECS2WZL561M◇◇△△3550
	1 500	474	237	0,20	1,5	2,10	40 x 50	ECS2WZL561M◇◇△△4050
		391	196	0,20	1,5	2,50	35 x 60	ECS2WZL681M◇◇△△3560
	1 800	391	196	0,20	1,5	2,40	40 x 55	ECS2WZL681M◇◇△△4055
		324	162	0,20	1,5	2,70	35 x 70	ECS2WZL821M◇◇△△3570
2 000	324	162	0,20	1,5	2,80	40 x 70	ECS2WZL821M◇◇△△4070	
	324	162	0,20	1,5	3,00	45 x 45	ECS2WZL821M◇◇△△4545	
2 200	266	139	0,20	1,5	3,40	35 x 105	ECS2WZL102M◇◇△△35105	
	266	139	0,20	1,5	4,00	40 x 80	ECS2WZL102M◇◇△△4080	
2 400	222	114	0,20	1,5	3,50	40 x 90	ECS2WZL122M◇◇△△4090	
	222	114	0,20	1,5	4,50	40 x 100	ECS2WZL122M◇◇△△40100	
2 600	177	100	0,20	1,5	3,80	40 x 100	ECS2WZL152M◇◇△△40100	

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 105°C 105°C	Size øD x L (mm)	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 79
<b>500</b> <b>(550)</b> <b>2H</b>	180	1474	737	0,20	0,9	1,10	35 x 30	

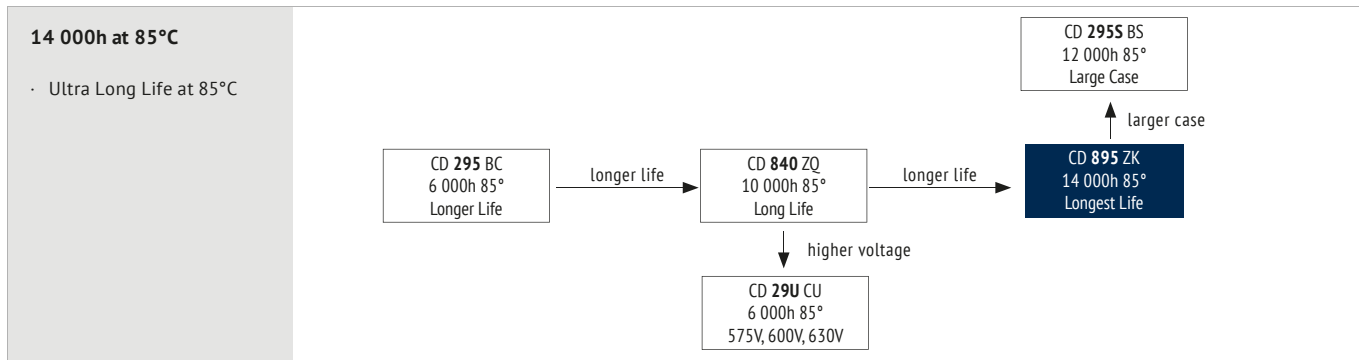

**ITEM CHARACTERISTICS**

Operating Temperature Range (°C)	-40 ~ +85	-25 ~ +85
Voltage Range (V)	16 ~ 100	160 ~ 500
Capacitance Range (µF)	39 ~ 47 000	
Capacitance Tolerance (20°C, 120Hz)	± 20%	

**!** The usage at lower temperatures than indicated may be possible. Please contact the Jianghai Europe sales office for approval.

Leakage Current: After 5 minutes at 20°C application of rated voltage, leakage current is not more than specified in table.

Stability at Low Temperature (Impedance Ratio at 120Hz)	Rated Voltage (V)	16~100	160~200	250~500
	$Z_{-25°C} / Z_{+20°C}$	4		
	$Z_{-40°C} / Z_{+20°C}$	15	-	-

Fast Charge-Discharge: **!** Please contact Jianghai for an appropriate choice of the capacitor or possible technical adaptations, esp. for applications like: Welding, Photoflash, Servo motors, X-Ray


ITEM	USEFUL LIFE		LOAD LIFE	ENDURANCE TEST	SHELF LIFE	
Lifetime	14 000h	> 150 000h	6 000h	9 000h	1 000h	
Leakage Current	Not more than specified value		Not more than specified value	Not more than specified value	Not more than specified value	
Capacitance Change	Within ± 30% of initial value		Within ± 20% of initial value	Within ± 20% of initial value	Within ± 15% of initial value	
Dissipation Factor	Not more than 300% of specified value		Not more than 200% of specified value	Not more than 200% of specified value	Not more than 150% of specified value	
Condition:						
Applied Voltage	$U_R$	$U_R$	$U_R$	$U_R$	$U_R = 0$	After test: $U_R$ to be applied for 30 min > 24h before measurement
Applied Current	$I_R$	$1,5 \times I_R$	$I_R$	$I_R = 0$	$I_R = 0$	
Applied Temperature	85°C	40°C	85°C	85°C IEC 60384	85°C	

**MULTIPLIER FOR RIPPLE CURRENT (FREQUENCY COEFFICIENT)**

Frequency	50Hz	120Hz	300Hz	1kHz	10kHz	≥50kHz
Rated Voltage (V)						
≤ 100	0,95	1,00	1,07	1,13	1,19	1,20
160 ~ 250	0,87	1,00	1,17	1,32	1,45	1,50
≥ 350	0,80	1,00	1,16	1,30	1,41	1,43

Multipliers for typical operating conditions.

**MULTIPLIER FOR LIFETIME (LIFETIME DIAGRAM)**

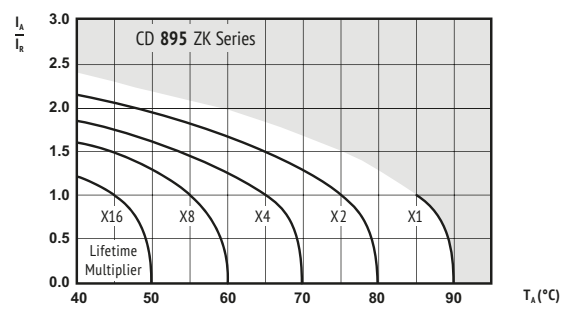

$I_A$  = actual ripple current at 120Hz,  $I_R$  = rated ripple current at 120Hz, 85°C  
Multiplier of Useful Life as a function of ambient temperature & ripple current load

**!** Max. Current Snap-In Terminal: 15A. For more current use Lug-Terminals.

**ENVIRONMENTAL**

The products are RoHS, WEEE and REACH compliant. The detailed version please see separate "Environmental Certificates" document or www.jianghai-europe.com

**!** SAFETY FACTOR

This diagram includes a safety margin. In many cases the allowed current capability/lifetime may be increased. For details and approvals please contact the Jianghai Europe sales office.

SNAP-IN

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 85°C 120Hz	Size øD x L (mm)	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 79	
<b>16</b> (20) 1C	6 800	98	69	0,50	1,1	1,68	22 x 25	ECS1CZK682M◇◇△△2225	
		10 000	67	47	0,50	1,5	2,09	22 x 30	ECS1CZK103M◇◇△△2230
			67	47	0,50	1,5	2,09	25 x 25	ECS1CZK103M◇◇△△2525
	12 000	56	39	0,50	1,5	2,39	22 x 35	ECS1CZK123M◇◇△△2235	
		15 000	56	39	0,50	1,5	2,41	25 x 30	ECS1CZK123M◇◇△△2530
			56	39	0,50	1,5	2,50	30 x 25	ECS1CZK123M◇◇△△3025
	18 000	45	31	0,50	1,5	2,77	22 x 40	ECS1CZK153M◇◇△△2240	
		22 000	45	31	0,50	1,5	2,81	25 x 35	ECS1CZK153M◇◇△△2535
			37	26	0,50	1,5	3,13	22 x 45	ECS1CZK183M◇◇△△2245
	27 000	37	26	0,50	1,5	3,19	25 x 40	ECS1CZK183M◇◇△△2540	
		33 000	37	26	0,50	1,5	3,15	30 x 30	ECS1CZK183M◇◇△△3030
			37	26	0,50	1,5	3,26	35 x 25	ECS1CZK183M◇◇△△3525
	39 000	31	22	0,50	1,5	3,57	25 x 45	ECS1CZK223M◇◇△△2545	
		47 000	31	22	0,50	1,5	3,56	30 x 35	ECS1CZK223M◇◇△△3035
			25	18	0,50	1,5	4,00	25 x 50	ECS1CZK273M◇◇△△2550
	47 000	25	18	0,50	1,5	4,02	30 x 40	ECS1CZK273M◇◇△△3040	
		33 000	25	18	0,50	1,5	3,92	35 x 30	ECS1CZK273M◇◇△△3530
			21	15	0,50	1,5	4,52	30 x 45	ECS1CZK333M◇◇△△3045
	39 000	21	15	0,50	1,5	4,45	35 x 35	ECS1CZK333M◇◇△△3535	
		47 000	18	12	0,50	1,5	4,98	30 x 50	ECS1CZK393M◇◇△△3050
			18	12	0,50	1,5	4,96	35 x 40	ECS1CZK393M◇◇△△3540
	15	10	0,50	1,5	5,53	35 x 45	ECS1CZK473M◇◇△△3545		

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 85°C 120Hz	Size øD x L (mm)	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 79	
<b>25</b> (32) 1E	4 700	113	80	0,40	1,2	1,63	22 x 25	ECS1EZK472M◇◇△△2225	
		6 800	79	55	0,40	1,5	2,01	22 x 30	ECS1EZK682M◇◇△△2230
			79	55	0,40	1,5	2,01	25 x 25	ECS1EZK682M◇◇△△2525
	8 200	65	46	0,40	1,5	2,25	22 x 35	ECS1EZK822M◇◇△△2235	
		10 000	65	46	0,40	1,5	2,27	25 x 30	ECS1EZK822M◇◇△△2530
			65	46	0,40	1,5	2,36	30 x 25	ECS1EZK822M◇◇△△3025
	12 000	54	38	0,40	1,5	2,52	22 x 40	ECS1EZK103M◇◇△△2240	
		15 000	54	38	0,40	1,5	2,56	25 x 35	ECS1EZK103M◇◇△△2535
			45	31	0,40	1,5	2,83	22 x 45	ECS1EZK123M◇◇△△2245
	18 000	45	31	0,40	1,5	2,88	25 x 40	ECS1EZK123M◇◇△△2540	
		22 000	45	31	0,40	1,5	2,84	30 x 30	ECS1EZK123M◇◇△△3030
			45	31	0,40	1,5	2,94	35 x 25	ECS1EZK123M◇◇△△3525
	27 000	36	25	0,40	1,5	3,31	25 x 45	ECS1EZK153M◇◇△△2545	
		33 000	36	25	0,40	1,5	3,29	30 x 35	ECS1EZK153M◇◇△△3035
			36	25	0,40	1,5	3,38	35 x 30	ECS1EZK153M◇◇△△3530
	33 000	30	21	0,40	1,5	3,72	25 x 50	ECS1EZK183M◇◇△△2550	
		27 000	30	21	0,40	1,5	3,72	30 x 40	ECS1EZK183M◇◇△△3040
			25	17	0,40	1,5	4,45	30 x 45	ECS1EZK223M◇◇△△3045
	27 000	25	17	0,40	1,5	4,16	35 x 35	ECS1EZK223M◇◇△△3535	
		33 000	20	14	0,40	1,5	4,99	35 x 45	ECS1EZK273M◇◇△△3545
			20	14	0,40	1,5	5,66	35 x 50	ECS1EZK333M◇◇△△3550

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 85°C 120Hz	Size øD x L (mm)	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 79	
<b>35</b> (44) 1V	3 300	141	99	0,35	1,2	1,50	22 x 25	ECS1VZK332M◇◇△△2225	
		3 900	120	84	0,35	1,4	1,73	22 x 30	ECS1VZK392M◇◇△△2230
			120	84	0,35	1,4	1,73	25 x 25	ECS1VZK392M◇◇△△2525
	4 700	83	59	0,35	1,5	2,12	22 x 35	ECS1VZK562M◇◇△△2235	
		5 600	83	59	0,35	1,5	2,14	25 x 30	ECS1VZK562M◇◇△△2530
			83	59	0,35	1,5	2,22	30 x 25	ECS1VZK562M◇◇△△3025
	6 800	69	48	0,35	1,5	2,39	22 x 40	ECS1VZK682M◇◇△△2240	
		8 200	69	48	0,35	1,5	2,43	25 x 35	ECS1VZK682M◇◇△△2535
			57	40	0,35	1,5	2,80	22 x 50	ECS1VZK822M◇◇△△2250
	10 000	57	40	0,35	1,5	2,73	25 x 40	ECS1VZK822M◇◇△△2540	
		12 000	57	40	0,35	1,5	2,69	30 x 30	ECS1VZK822M◇◇△△3030
			57	40	0,35	1,5	2,92	35 x 25	ECS1VZK822M◇◇△△3525
	15 000	47	33	0,35	1,5	3,07	25 x 45	ECS1VZK103M◇◇△△2545	
		18 000	47	33	0,35	1,5	3,07	30 x 35	ECS1VZK103M◇◇△△3035
			39	28	0,35	1,5	3,42	25 x 50	ECS1VZK123M◇◇△△2550
	22 000	39	28	0,35	1,5	3,44	30 x 40	ECS1VZK123M◇◇△△3040	
		15 000	39	28	0,35	1,5	3,36	35 x 30	ECS1VZK123M◇◇△△3530
			31	22	0,35	1,5	3,93	30 x 45	ECS1VZK153M◇◇△△3045
	18 000	31	22	0,35	1,5	3,88	35 x 35	ECS1VZK153M◇◇△△3535	
		22 000	26	19	0,35	1,5	4,37	35 x 40	ECS1VZK183M◇◇△△3540
			26	19	0,35	1,5	5,17	35 x 50	ECS1VZK223M◇◇△△3550

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 85°C 120Hz	Size øD x L (mm)	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 79	
<b>50</b> (63) 1H	1 800	222	155	0,30	0,9	1,37	22 x 25	ECS1HZK182M◇◇△△2225	
		2 200	181	127	0,30	1,1	1,53	22 x 30	ECS1HZK222M◇◇△△2230
			148	104	0,30	1,4	1,79	22 x 30	ECS1HZK272M◇◇△△2230
	2 700	148	104	0,30	1,4	1,79	25 x 25	ECS1HZK272M◇◇△△2525	
		3 300	121	85	0,30	1,5	2,05	22 x 35	ECS1HZK332M◇◇△△2235
			121	85	0,30	1,5	2,10	25 x 30	ECS1HZK332M◇◇△△2530
	3 900	103	72	0,30	1,5	2,36	22 x 40	ECS1HZK392M◇◇△△2240	
		4 700	103	72	0,30	1,5	2,39	25 x 35	ECS1HZK392M◇◇△△2535
			103	72	0,30	1,5	2,33	30 x 25	ECS1HZK392M◇◇△△3025
	5 600	85	60	0,30	1,5	2,69	22 x 45	ECS1HZK472M◇◇△△2245	
		6 800	85	60	0,30	1,5	2,71	30 x 30	ECS1HZK472M◇◇△△3030
			85	60	0,30	1,5	2,80	35 x 25	ECS1HZK472M◇◇△△3525
	8 200	72	50	0,30	1,5	3,03	22 x 50	ECS1HZK562M◇◇△△2250	
		10 000	72	50	0,30	1,5	2,95	25 x 40	ECS1HZK562M◇◇△△2540
			72	50	0,30	1,5	3,10	30 x 35	ECS1HZK562M◇◇△△3035
	12 000	59	41	0,30	1,5	3,54	25 x 50	ECS1HZK682M◇◇△△2550	
		12 000	59	41	0,30	1,5	3,56	30 x 40	ECS1HZK682M◇◇△△3040
			59	41	0,30	1,5	3,48	35 x 30	ECS1HZK682M◇◇△△3530
	12 000	49	34	0,30	1,5	3,90	30 x 45	ECS1HZK822M◇◇△△3045	
		12 000	49	34	0,30	1,5	3,84	35 x 35	ECS1HZK822M◇◇△△3535
			40	28	0,30	1,5	4,29	30 x 50	ECS1HZK103M◇◇△△3050
	12 000	40	28	0,30	1,5	4,27	35 x 40	ECS1HZK103M◇◇△△3540	
		12 000	34	24	0,30	1,5	4,73	35 x 45	ECS1HZK123M◇◇△△3545

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 85°C 120Hz	Size øD x L (mm)	ORDER CODE ◇◇ = pin style & length △△ = pin number Details: Page 79	
<b>63</b> (79) 1J	1 200	222	155	0,20	0,8	1,31	22 x 25	ECS1JZK122M◇◇△△2225	
		1 800	148	104	0,20	1,1	1,60	22 x 30	ECS1JZK182M◇◇△△2230
			148	104	0,20	1,1	1,60	25 x 25	ECS1JZK182M◇◇△△2525
	2 200	121	85	0,20	1,4	1,82	22 x 35	ECS1JZK222M◇◇△△2235	
		2 700	121	85	0,20	1,4	1,84	25 x 30	ECS1JZK222M◇◇△△2530
			99	69	0,20	1,5	2,07	22 x 40	ECS1JZK272M◇◇△△2240
	3 300	99	69	0,20	1,5	2,09	25 x 35	ECS1JZK272M◇◇△△2535	
		3 900	99	69	0,20	1,5	2,03	30 x 25	ECS1JZK272M◇◇△△3025
			81	57	0,20	1,5	2,44	22 x 50	ECS1JZK332M◇◇△△2250
	4 700	81	57	0,20	1,5	2,38	25 x 40	ECS1JZK332M◇◇△△2540	
		5 600	81	57	0,20	1,5	2,35	30 x 30	ECS1JZK332M◇◇△△3030
			81	57	0,20	1,5	2,53	35 x 25	ECS1JZK332M◇◇△△3525
	6 800	69	48	0,20	1,5	2,67	25 x 45	ECS1JZK392M◇◇△△2545	
		8 200	69	48	0,20	1,5	2,68	30 x 35	ECS1JZK392M◇◇△△3035
			57	40	0,20	1,5	3,02	25 x 50	ECS1JZK472M◇◇△△2550
	10 000	57	40	0,20	1,5	3,05	30 x 40	ECS1JZK472M◇◇△△3040	
		10 000	57	40	0,20	1,5	2,97	35 x 30	ECS1JZK472M◇◇△△3530
			48	34	0,20	1,5	3,44	30 x 45	ECS1JZK562M◇◇△△3045
	10 000	48	34	0,20	1,5	3,40	35 x 35	ECS1JZK562M◇◇△△3535	
		10 000	40	28	0,20	1,5	3,92	30 x 50	ECS1JZK682M◇◇△△3050
			40	28	0,20	1,5	3,90	35 x 40	ECS1JZK682M◇◇△△3540
	10 000	33	23	0,20	1,5	4,37	35 x 45	ECS1JZK822M◇◇△△3545	
		10 000	27	19	0,20	1,5	4,92	35 x 50	ECS1JZK103M◇◇△△3550

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> <
---	------------------

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 85°C 120Hz	Size øD x L	ORDER CODE
---	-------------------------------------	---	---	---	--------------------------------------	---	----------------	------------

(V)	(µF)	(mΩ)	(mΩ)		(mA)	(Arms)	(mm)	Details: Page 79
-----	------	------	------	--	------	--------	------	------------------

80 (100) 1K	4 700	57	40	0,20	1,5	3,74	30 x 50	ECS1KZK472M $\diamond\Delta\Delta$ 3050
		57	40	0,20	1,5	3,68	35 x 40	ECS1KZK472M $\diamond\Delta\Delta$ 3540
	5 600	48	34	0,20	1,5	4,06	35 x 45	ECS1KZK562M $\diamond\Delta\Delta$ 3545
		40	28	0,20	1,5	4,40	35 x 50	ECS1KZK682M $\diamond\Delta\Delta$ 3550
100 (125) 2A	560	474	332	0,20	0,6	1,12	22 x 25	ECS2AZK561M $\diamond\Delta\Delta$ 2225
		324	227	0,20	0,8	1,42	22 x 30	ECS2AZK821M $\diamond\Delta\Delta$ 2230
		324	227	0,20	0,8	1,42	25 x 25	ECS2AZK821M $\diamond\Delta\Delta$ 2525
	820	266	186	0,20	1,0	1,62	22 x 35	ECS2AZK102M $\diamond\Delta\Delta$ 2235
		266	186	0,20	1,0	1,64	25 x 30	ECS2AZK102M $\diamond\Delta\Delta$ 2530
	1 000	222	155	0,20	1,2	1,83	22 x 40	ECS2AZK122M $\diamond\Delta\Delta$ 2240
		222	155	0,20	1,2	1,85	25 x 35	ECS2AZK122M $\diamond\Delta\Delta$ 2535
		222	155	0,20	1,2	1,80	30 x 25	ECS2AZK122M $\diamond\Delta\Delta$ 3025
	1 200	177	124	0,20	1,5	2,09	22 x 45	ECS2AZK152M $\diamond\Delta\Delta$ 2245
		177	124	0,20	1,5	2,13	25 x 40	ECS2AZK152M $\diamond\Delta\Delta$ 2540
		177	124	0,20	1,5	2,10	30 x 30	ECS2AZK152M $\diamond\Delta\Delta$ 3030
	1 500	177	124	0,20	1,5	2,17	35 x 25	ECS2AZK152M $\diamond\Delta\Delta$ 3525
		148	104	0,20	1,5	2,39	25 x 45	ECS2AZK182M $\diamond\Delta\Delta$ 2545
		148	104	0,20	1,5	2,38	30 x 35	ECS2AZK182M $\diamond\Delta\Delta$ 3035
	1 800	121	85	0,20	1,5	2,70	25 x 50	ECS2AZK222M $\diamond\Delta\Delta$ 2550
		121	85	0,20	1,5	2,72	30 x 40	ECS2AZK222M $\diamond\Delta\Delta$ 3040
	2 200	121	85	0,20	1,5	2,65	35 x 30	ECS2AZK222M $\diamond\Delta\Delta$ 3530
		99	69	0,20	1,5	3,09	30 x 45	ECS2AZK272M $\diamond\Delta\Delta$ 3045
	2 700	99	69	0,20	1,5	3,05	35 x 35	ECS2AZK272M $\diamond\Delta\Delta$ 3535
		81	57	0,20	1,5	3,49	30 x 50	ECS2AZK332M $\diamond\Delta\Delta$ 3050
3 300	81	57	0,20	1,5	3,48	35 x 40	ECS2AZK332M $\diamond\Delta\Delta$ 3540	
	69	48	0,20	1,5	3,88	35 x 45	ECS2AZK392M $\diamond\Delta\Delta$ 3545	
4 700	57	40	0,20	1,5	4,35	35 x 50	ECS2AZK472M $\diamond\Delta\Delta$ 3550	

160 (200) 2C	330	603	423	0,15	0,5	1,22	22 x 25	ECS2CZK331M $\diamond\Delta\Delta$ 2225
		390	511	358	0,15	0,6	1,50	22 x 30
	470	424	297	0,15	0,8	1,60	22 x 35	ECS2CZK471M $\diamond\Delta\Delta$ 2235
		424	297	0,15	0,8	1,63	25 x 25	ECS2CZK471M $\diamond\Delta\Delta$ 2525
	560	356	249	0,15	0,9	1,70	22 x 40	ECS2CZK561M $\diamond\Delta\Delta$ 2240
		356	249	0,15	0,9	1,82	25 x 30	ECS2CZK561M $\diamond\Delta\Delta$ 2530
	680	293	205	0,15	1,1	1,79	22 x 45	ECS2CZK681M $\diamond\Delta\Delta$ 2245
		293	205	0,15	1,1	1,90	25 x 35	ECS2CZK681M $\diamond\Delta\Delta$ 2535
		293	205	0,15	1,1	1,91	30 x 25	ECS2CZK681M $\diamond\Delta\Delta$ 3025
	820	243	170	0,15	1,3	1,90	22 x 50	ECS2CZK821M $\diamond\Delta\Delta$ 2250
		243	170	0,15	1,3	2,08	25 x 40	ECS2CZK821M $\diamond\Delta\Delta$ 2540
		243	170	0,15	1,3	2,08	30 x 30	ECS2CZK821M $\diamond\Delta\Delta$ 3030
1 000	243	170	0,15	1,3	2,03	35 x 25	ECS2CZK821M $\diamond\Delta\Delta$ 3525	
	199	140	0,15	1,5	2,14	25 x 45	ECS2CZK102M $\diamond\Delta\Delta$ 2545	
	199	140	0,15	1,5	2,25	30 x 35	ECS2CZK102M $\diamond\Delta\Delta$ 3035	
1 200	166	117	0,15	1,5	2,23	25 x 50	ECS2CZK122M $\diamond\Delta\Delta$ 2550	
	166	117	0,15	1,5	2,33	30 x 40	ECS2CZK122M $\diamond\Delta\Delta$ 3040	
	166	117	0,15	1,5	2,52	35 x 30	ECS2CZK122M $\diamond\Delta\Delta$ 3530	
1 500	133	93	0,15	1,5	2,58	30 x 45	ECS2CZK152M $\diamond\Delta\Delta$ 3045	
	133	93	0,15	1,5	2,66	35 x 35	ECS2CZK152M $\diamond\Delta\Delta$ 3535	
1 800	111	78	0,15	1,5	3,13	35 x 45	ECS2CZK182M $\diamond\Delta\Delta$ 3545	
	2 200	91	64	0,15	1,5	3,26	35 x 50	ECS2CZK222M $\diamond\Delta\Delta$ 3550

200 (250) 2D	220	905	634	0,15	0,4	1,13	22 x 25	ECS2DZK221M $\diamond\Delta\Delta$ 2225
		270	737	516	0,15	0,5	1,26	22 x 30
	330	603	423	0,15	0,7	1,36	22 x 30	ECS2DZK331M $\diamond\Delta\Delta$ 2230
		603	423	0,15	0,7	1,42	25 x 25	ECS2DZK331M $\diamond\Delta\Delta$ 2525
	390	511	358	0,15	0,8	1,48	22 x 35	ECS2DZK391M $\diamond\Delta\Delta$ 2235
		424	297	0,15	0,9	1,58	22 x 40	ECS2DZK471M $\diamond\Delta\Delta$ 2240
	470	424	297	0,15	0,9	1,54	25 x 30	ECS2DZK471M $\diamond\Delta\Delta$ 2530
		424	297	0,15	0,9	1,64	30 x 25	ECS2DZK471M $\diamond\Delta\Delta$ 3025
	560	356	249	0,15	1,1	1,66	22 x 45	ECS2DZK561M $\diamond\Delta\Delta$ 2245
		356	249	0,15	1,1	1,73	25 x 35	ECS2DZK561M $\diamond\Delta\Delta$ 2535
	680	293	205	0,15	1,4	1,76	22 x 50	ECS2DZK681M $\diamond\Delta\Delta$ 2250
		293	205	0,15	1,4	1,89	25 x 40	ECS2DZK681M $\diamond\Delta\Delta$ 2540
293		205	0,15	1,4	1,91	30 x 30	ECS2DZK681M $\diamond\Delta\Delta$ 3030	
293		205	0,15	1,4	2,06	35 x 25	ECS2DZK681M $\diamond\Delta\Delta$ 3525	

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 85°C 120Hz	Size øD x L	ORDER CODE
---	-------------------------------------	---	---	---	--------------------------------------	---	----------------	------------

(V)	(µF)	(mΩ)	(mΩ)		(mA)	(Arms)	(mm)	Details: Page 79
-----	------	------	------	--	------	--------	------	------------------

200 (250) 2D	820	243	170	0,15	1,5	1,96	25 x 50	ECS2DZK821M $\diamond\Delta\Delta$ 2550
		243	170	0,15	1,5	2,09	30 x 35	ECS2DZK821M $\diamond\Delta\Delta$ 3035
		243	170	0,15	1,5	2,17	35 x 30	ECS2DZK821M $\diamond\Delta\Delta$ 3530
	1 000	199	140	0,15	1,5	2,28	30 x 45	ECS2DZK102M $\diamond\Delta\Delta$ 3045
		199	140	0,15	1,5	2,33	35 x 35	ECS2DZK102M $\diamond\Delta\Delta$ 3535
	1 200	166	117	0,15	1,5	2,33	30 x 50	ECS2DZK122M $\diamond\Delta\Delta$ 3050
166		117	0,15	1,5	2,54	35 x 40	ECS2DZK122M $\diamond\Delta\Delta$ 3540	
1 500	133	93	0,15	1,5	2,72	35 x 45	ECS2DZK152M $\diamond\Delta\Delta$ 3545	
1 800	111	78	0,15	1,5	2,84	35 x 50	ECS2DZK182M $\diamond\Delta\Delta$ 3550	

250 (300) 2E	180	1106	774	0,15	0,5	0,99	22 x 25	ECS2EZK181M $\diamond\Delta\Delta$ 2225
		905	634	0,15	0,6	1,15	22 x 30	ECS2EZK221M $\diamond\Delta\Delta$ 2230
	220	905	634	0,15	0,6	1,21	25 x 25	ECS2EZK221M $\diamond\Delta\Delta$ 2525
		270	737	516	0,15	0,7	1,19	22 x 35
	330	603	423	0,15	0,8	1,26	22 x 40	ECS2EZK331M $\diamond\Delta\Delta$ 2240
		603	423	0,15	0,8	1,37	25 x 30	ECS2EZK331M $\diamond\Delta\Delta$ 2530
		603	423	0,15	0,8	1,37	30 x 25	ECS2EZK331M $\diamond\Delta\Delta$ 3025
	390	511	358	0,15	1,0	1,32	22 x 45	ECS2EZK391M $\diamond\Delta\Delta$ 2245
		511	358	0,15	1,0	1,48	25 x 35	ECS2EZK391M $\diamond\Delta\Delta$ 2535
	470	424	297	0,15	1,2	1,44	22 x 50	ECS2EZK471M $\diamond\Delta\Delta$ 2250
		424	297	0,15	1,2	1,60	25 x 40	ECS2EZK471M $\diamond\Delta\Delta$ 2540
		424	297	0,15	1,2	1,43	30 x 30	ECS2EZK471M $\diamond\Delta\Delta$ 3030
560	424	297	0,15	1,2	1,47	35 x 25	ECS2EZK471M $\diamond\Delta\Delta$ 3525	
	356	249	0,15	1,4	1,67	25 x 45	ECS2EZK561M $\diamond\Delta\Delta$ 2545	
	356	249	0,15	1,4	1,65	30 x 35	ECS2EZK561M $\diamond\Delta\Delta$ 3035	
680	356	249	0,15	1,4	1,64	35 x 30	ECS2EZK561M $\diamond\Delta\Delta$ 3530	
	293	205	0,15	1,5	1,85	25 x 50	ECS2EZK681M $\diamond\Delta\Delta$ 2550	
	293	205	0,15	1,5	1,85	30 x 40	ECS2EZK681M $\diamond\Delta\Delta$ 3040	
820	243	170	0,15	1,5	1,92	30 x 45	ECS2EZK821M $\diamond\Delta\Delta$ 3045	
	243	170	0,15	1,5	1,91	35 x 35	ECS2EZK821M $\diamond\Delta\Delta$ 3535	
1 000	199	140	0,15	1,5	1,96	30 x 50	ECS2EZK102M $\diamond\Delta\Delta$ 3050	
	199	140	0,15	1,5	2,09	35 x 40	ECS2EZK102M $\diamond\Delta\Delta$ 3540	
1 200	166	117	0,15	1,5	2,20	35 x 45	ECS2EZK122M $\diamond\Delta\Delta$ 3545	

350 (400) 2V	68	2926	1610	0,15	0,2	0,59	22 x 25	ECS2VZK680M $\diamond\Delta\Delta$ 2225
		1990	1095	0,15	0,4	0,74	22 x 30	ECS2VZK101M $\diamond\Delta\Delta$ 2230
	100	1990	1950	0,15	0,4	0,74	25 x 25	ECS2VZK101M $\diamond\Delta\Delta$ 2525
		120	1658	912	0,15	0,4	0,77	22 x 35
	150	1327	730	0,15	0,5	0,83	22 x 40	ECS2VZK151M $\diamond\Delta\Delta$ 2240
		1327	730	0,15	0,5	0,86	25 x 30	ECS2VZK151M $\diamond\Delta\Delta$ 2530
		1327	730	0,15	0,5	0,86	30 x 25	ECS2VZK151M $\diamond\Delta\Delta$ 3025
	180	1106	608	0,15	0,6	0,85	22 x 45	ECS2VZK181M $\diamond\Delta\Delta$ 2245
		1106	608	0,15	0,6	0,93	25 x 35	ECS2VZK181M $\diamond\Delta\Delta$ 2535
	220	1106	608	0,15	0,6	0,95	30 x 30	ECS2VZK181M $\diamond\Delta\Delta$ 3030
		905	498	0,15	0,8	0,98	22 x 50	ECS2VZK221M $\diamond\Delta\Delta$ 2250
	270	905	498	0,15	0,8	1,01	25 x 40	ECS2VZK221M $\diamond\Delta\Delta$ 2540
905		498	0,15	0,8	1,03	35 x 25	ECS2VZK221M $\diamond\Delta\Delta$ 3525	
737		406	0,15	0,9	1,06	25 x 50	ECS2VZK271M $\diamond\Delta\Delta$ 2550	
330	737	406	0,15					

U <sub>RDC</sub> (Surge Voltage) Code  (V)	C <sub>R</sub> Rated Capacitance  (µF)	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz (mΩ)	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz (mΩ)	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current (mA)	I <sub>RAC</sub> Rated Ripple Current 85°C 120Hz (Arms)	Size øD x L  (mm)	ORDER CODE ◇◇ = pin style & length △△ = pin number  Details: Page 79	
<b>400</b> <b>(450)</b> <b>2G</b>	180	1106	575	0,15	0,7	0,82	22 x 50	ECS2GZK181M◇◇△△2250	
		1106	575	0,15	0,7	0,86	25 x 40	ECS2GZK181M◇◇△△2540	
		1106	575	0,15	0,7	0,87	30 x 30	ECS2GZK181M◇◇△△3030	
		1106	575	0,15	0,7	0,90	35 x 25	ECS2GZK181M◇◇△△3525	
	220	905	471	0,15	0,9	0,91	25 x 45	ECS2GZK221M◇◇△△2545	
		905	471	0,15	0,9	0,90	30 x 35	ECS2GZK221M◇◇△△3035	
	270	737	384	0,15	1,1	0,99	25 x 50	ECS2GZK271M◇◇△△2550	
		737	384	0,15	1,1	1,00	30 x 40	ECS2GZK271M◇◇△△3040	
		737	384	0,15	1,1	0,96	35 x 30	ECS2GZK271M◇◇△△3530	
	330	603	314	0,15	1,3	1,17	30 x 45	ECS2GZK331M◇◇△△3045	
		603	314	0,15	1,3	1,19	35 x 35	ECS2GZK331M◇◇△△3535	
	390	511	266	0,15	1,5	1,21	30 x 50	ECS2GZK391M◇◇△△3050	
		511	266	0,15	1,5	1,32	35 x 40	ECS2GZK391M◇◇△△3540	
	470	424	221	0,15	1,5	1,38	35 x 45	ECS2GZK471M◇◇△△3545	
	560	356	185	0,15	1,5	1,58	35 x 50	ECS2GZK561M◇◇△△3550	
	<b>450</b> <b>(500)</b> <b>2W</b>	56	4737	2369	0,20	0,3	0,49	22 x 25	ECS2WZK560M◇◇△△2225
		68	3901	1951	0,20	0,3	0,59	22 x 30	ECS2WZK680M◇◇△△2230
			3901	1951	0,20	0,3	0,63	25 x 25	ECS2WZK680M◇◇△△2525
82		3235	1618	0,20	0,4	0,67	22 x 35	ECS2WZK820M◇◇△△2235	
100		2653	1327	0,20	0,5	0,74	22 x 40	ECS2WZK101M◇◇△△2240	
		2653	1327	0,20	0,5	0,74	25 x 30	ECS2WZK101M◇◇△△2530	
		2653	1327	0,20	0,5	0,82	30 x 25	ECS2WZK101M◇◇△△3025	
120		2211	1106	0,20	0,5	0,77	22 x 45	ECS2WZK121M◇◇△△2245	
		2211	1106	0,20	0,5	0,77	25 x 35	ECS2WZK121M◇◇△△2535	
150		1769	885	0,20	0,7	0,82	22 x 50	ECS2WZK151M◇◇△△2250	
		1769	885	0,20	0,7	0,86	25 x 40	ECS2WZK151M◇◇△△2540	
		1769	885	0,20	0,7	0,87	30 x 30	ECS2WZK151M◇◇△△3030	
		1769	885	0,20	0,7	0,90	35 x 25	ECS2WZK151M◇◇△△3525	
180		1474	737	0,20	0,8	0,91	25 x 45	ECS2WZK181M◇◇△△2545	
		1474	737	0,20	0,8	0,90	30 x 35	ECS2WZK181M◇◇△△3035	
220		1206	603	0,20	1,0	0,99	25 x 50	ECS2WZK221M◇◇△△2550	
		1206	603	0,20	1,0	1,00	30 x 40	ECS2WZK221M◇◇△△3040	
		1206	603	0,20	1,0	0,96	35 x 30	ECS2WZK221M◇◇△△3530	
270		983	492	0,20	1,2	1,17	30 x 45	ECS2WZK271M◇◇△△3045	
		983	492	0,20	1,2	1,19	35 x 35	ECS2WZK271M◇◇△△3535	
330	804	402	0,20	1,5	1,21	30 x 50	ECS2WZK331M◇◇△△3050		
	804	402	0,20	1,5	1,32	35 x 40	ECS2WZK331M◇◇△△3540		
390	681	341	0,20	1,5	1,38	35 x 45	ECS2WZK391M◇◇△△3545		
470	565	283	0,20	1,5	1,58	35 x 50	ECS2WZK471M◇◇△△3550		
<b>500</b> <b>(550)</b> <b>2H</b>	39	6802	3401	0,20	0,2	0,37	22 x 30	ECS2HZK390M◇◇△△2230	
	47	5644	2822	0,20	0,2	0,43	22 x 35	ECS2HZK470M◇◇△△2235	
	56	4737	2369	0,20	0,3	0,49	22 x 40	ECS2HZK560M◇◇△△2240	
	68	3901	1951	0,20	0,3	0,57	22 x 45	ECS2HZK680M◇◇△△2245	
	82	3235	1618	0,20	0,4	0,65	25 x 40	ECS2HZK820M◇◇△△2540	
	100	2653	1327	0,20	0,5	0,70	25 x 45	ECS2HZK101M◇◇△△2545	
	120	2211	1106	0,20	0,6	0,81	25 x 50	ECS2HZK121M◇◇△△2550	
		2211	1106	0,20	0,6	0,76	35 x 30	ECS2HZK121M◇◇△△3530	
	150	1769	885	0,20	0,8	0,89	30 x 40	ECS2HZK151M◇◇△△3040	
	180	1474	737	0,20	0,9	1,06	30 x 50	ECS2HZK181M◇◇△△3050	
	220	1206	603	0,20	1,1	1,18	35 x 45	ECS2HZK221M◇◇△△3545	
	270	983	492	0,20	1,4	1,35	35 x 50	ECS2HZK271M◇◇△△3550	

4LW4YS B3 YOURS3LF.

UNL3SS YOU C4N B3  
4 D3V3LOPM3N7 SP3C14L1S7.

7H3N 4LW4YS B3 4  
D3V3LOPM3N7 SP3C14L1S7.

Image credit: Designed by Kater / Freepress

Capacitor Competence Center: [ccc@jianghai-europe.com](mailto:ccc@jianghai-europe.com)





# ELECTROLYTIC CAPACITORS

## Screw Type

### OVERVIEW SCREW


Portfolio: All Screw Type at a glance & Order code	138
Technical Specifications	139

SERIES SCREW	Code	Type	Temperature	Voltage	Lifetime	Info	
CD 135	BP	Screw	85°C	10-500V	4 000h	Standard	141
CD 136	PK	Screw	105°C	25-450V	4 000h	Standard	144
CD 137	PX	Screw	85°C	400-550V	10 000h	Long Life, High Voltage	146
CD 137S	PR	Screw	85°C	350-500V	12 000h	Miniaturized, Prolonged Lifetime	148
CD 138	PC	Screw	85°C	350-450V	10 000h	Long Life, High Current	150
CD 138S	WP	Screw	85°C	350-500V	15 000h	Longest Life, Highest Currents	152
CD 139	BL	Screw	105°C	350-450V	9 000h	Longest Life	154
CD 139S	HC	Screw	105°C	350-450V	9 000h	Longest Life 105°C, High Current	156
CD 13H <b>UPDATED</b>	BH	Screw	85°C	600-650V	4 000h	600V, 650V	158
CD 838	ZT	Screw	85°C	350-450V	10 000h	Miniaturized, Long Life	160





## SCREW TYPE

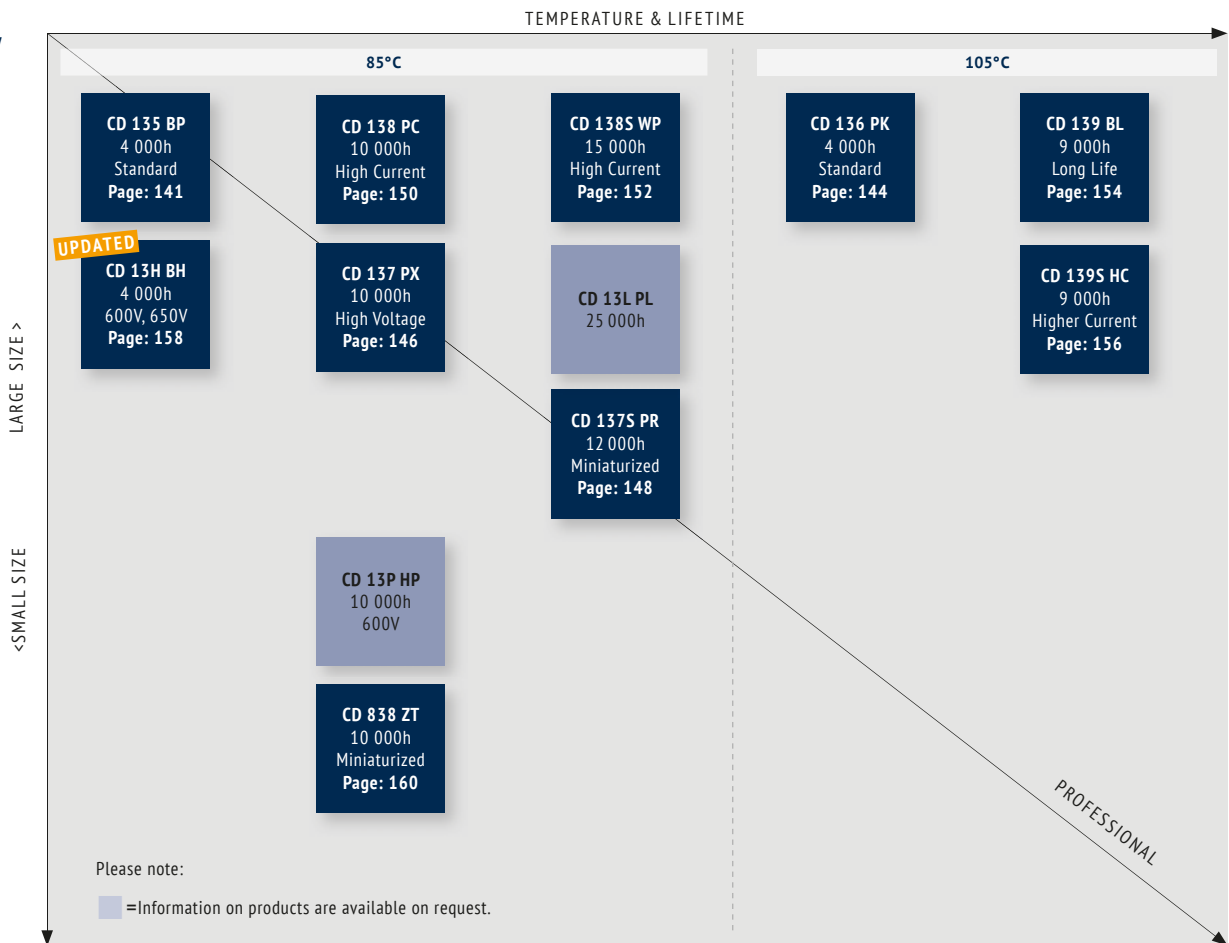

SCREW


## ORDER CODE SCREW TYPE

EC	G	2G	BP	102	M	B	E	160	A771	-	JExxxxx
Technology	Terminal Type	Rated Voltage Code	Series Code	Capacitance Code	Capacitance Tolerance	Mounting	Diameter	Length	For Terminal Code see tables on the right	Material Code	for Specials only
EC = Electrolytic Capacitor	Screw G	10 1A	CD 135 BP	100 101	<b>±20%</b> M	Bolt B	36 A	53 053	Standard: PVC Sleeve	-	-
		16 1C	CD 136 PK	1 000 102	±10% K	Flat bottom, no bracket, single sleeve N	40 B	65 065		PVC V	
		25 1E	CD 137 PX	10 000 103	+30/-10% Q	Flat bottom, no bracket, full double sleeve D	51 C	96 096		PET E	
		35 1V	CD 137S PR		+20/-0% R	Flat bottom incl. 2 stoppers bracket I	64 D	100 100		Polyolefin O	
		40 1G	CD 138 PC		+20/-10% V	Flat bottom incl. 3 stoppers bracket Y	77 E	115 115			
		50 1H	CD 138S WP		+50/-10% T	Details of Sleeving see table on the right	90 F	236 236			
		63 1J	CD 139 BL		<b>■ = preferred</b>		101 G				
		80 1K	CD 139S HC								
		100 2A	CD 13H BH								
		200 2D	CD 838 ZT								
		250 2E									
		350 2V									
		400 2G									
		420 2X									
		450 2W									
500 2H											
550 2Y											
575 2Z											
600 2S											
650 S6											





## TECHNICAL SPECIFICATION

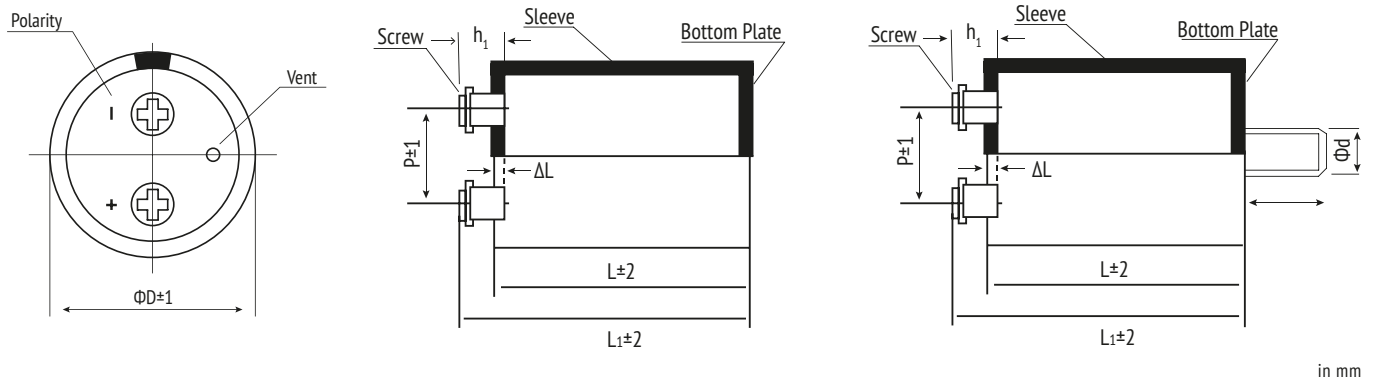

in mm

## LENGTH

<b><math>L_1 = L + h_1 - \Delta L</math></b>
$L_1$ = Total Capacitor Length
$L$ = Capacitor Case Length (see Capacitor Table)
$h_1$ = Terminal Length (see Terminal Code)
$\Delta L$ = Housing Correction (see Case & Mounting Style)

## CASE & MOUNTING STYLE

Order Code	Mounting Style	Sleeving Style (typical design)	Housing Correction $\Delta L$ (in mm)
B	Bolt	Single Sleeve	0,8
N	Flat bottom, no bracket	Single Sleeve	0,8
D	Flat bottom, no bracket	Full length Double Sleeve	0,4
I	I-Type Bracket	Diameter 36: Single Sleeve	0,8
		Diameter 51-101: Ur < 350V: ½ length Double Sleeve Ur ≥ 350V: full length Double Sleeve Other Sleeve Versions on request	0,6 0,4
Y	Y-Type Bracket	Ur < 350V: ½ length Double Sleeve Ur ≥ 350V: full length Double Sleeve Other Sleeve Versions on request	0,6 0,4

Bolt:	Ø D	Ø d	l (mm)	Max. Torque (Nm)
	Ø 36	M8	12	4
	≥ Ø 51	M12	16	12,5

## SCREW TERMINAL (Hexagon Head)

Dimension	Min. Thread Depth (mm)	Max. Torque (Nm)	Max. Ripple Current (A)
M5 x 10	8,5	3	60
M6 x 12	8,5	4	100
M8 x 16	8,5	6	100

## CAPACITOR POSITION

Screw capacitors need to be mounted into an upright position.  
**!** If a horizontal position is needed please ensure the safety vent is located on the highest position (12 o'clock).

## TERMINAL CODE

Terminal Code (cont. page 140)	ØD	Screw	Pitch P	d <sub>1</sub>	d <sub>2</sub>	h <sub>1</sub>	h <sub>2</sub>
A361	36	M5	12,7	8	11	6,8	1,8
A511	51	M5	21,8	10	13,0	6,8	1,8
D511	51	M5	21,8	10	13	5,5	0
A512	51	M5	21,8	10	13	7,14	0
A641	64	M5	28,2	10	15,5	7,3	2,3
C641	64	M5	28,5	13	0	7,2	0
C642	64	M6	28,6	13	0	5,5	0
D641	64	M5	28,2	13	15	6,4	0
D642	64	M6	28,2	13	15	6,4	0
E641/E642	64	M5	28,2	10	15,5	6,3	1,3
A771	77	M5	31,4	10	15,5	6,3	1,3
A772	77	M6	31,4	10	15,5	6,3	1,3
B771	77	M6	31,4	17,2	0	3,17	0
B772	77	M6	31,4	17,2	0	6,4	0
B774/B776	77	M5	31,4	17,2	0	6,4	0
C771	77	M5	31,4	17,2	0	3,5	0
C772	77	M6	31,4	17,2	0	3,5	0
C774	77	M5	31,4	17,2	0	6,4	0
C775	77	M6	31,4	17,2	0	6,4	0
C779	77	M6	31,4	13	0	5,5	0
D771	77	M5	31,4	13	15	6,4	0
E772	77	M5	31,4	10	15,5	6,3	1,3
E774	77	M5	31,4	13	17,5	5,5	3,5
F771	77	M6	31,4	13	15	6,4	0
F772	77	M5	31,4	13	15	6,4	0
A901	90	M5	31,4	10	15,5	6,3	1,3
B901	90	M6	31,4	17,2	0	6,4	0
B902	90	M5	31,4	17,2	0	6,4	0
C901/C905	90	M5	31,4	17,2	0	6,4	0
C902	90	M6	31,4	17,2	0	6,4	0
C904	90	M8	31,4	17,2	0	6,4	0
D902	90	M5	31,4	13	15	6,4	0
D903	90	M6	31,4	13	15	6,4	0
E901	90	M6	31,4	15	20	8,6	2,4
E902	90	M5	31,4	10	15,5	6,3	1,3
F901	90	M6	31,4	13	15	6,4	0
A101	101	M8	41,5	17,2	21,5	11	6

■ = preferred

Other forms on request, especially non-symmetrical layout, watercooling or laser welded terminals.

Terminal A101 = A991


Terminal A, B and F include a potting mass filling, Terminal C, D and E use a middle pin fixation without glue.

Extended Cathode designs only available with Terminal C, D and E.


Some series of the catalogue might only be available with Terminal C, D and E.



## TERMINAL FORM (C, D, E preferred; other designs on request)

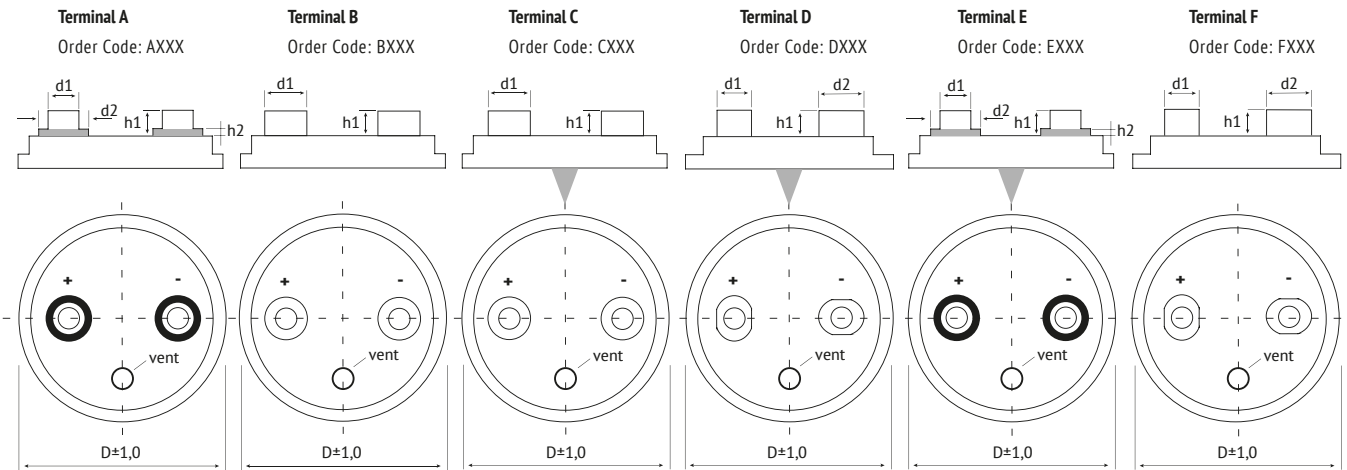

## BRACKET MOUNTING

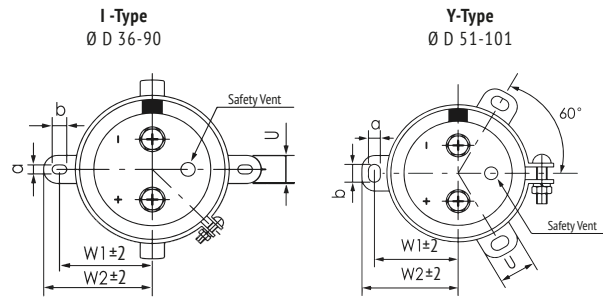


ØD	I-bracket						Y-bracket					
	w <sub>1</sub>	w <sub>2</sub>	a	b	U	h	w <sub>1</sub>	w <sub>2</sub>	a	b	U	h
36	24	29	3,8	7	10	15	-	-	-	-	-	-
51	34	40	5	7	14	30	31,8	36,5	5	7	14	30
64	40,5	46,5	5	7	14	30	38,1	42,6	5	7	14	30
77	46,8	53	5	7	14	30	44,5	49,2	5	7	14	30
90	54	60,3	5	7	14	30	50,8	55,6	5	7	14	30
101	-	-	-	-	-	-	57,5	63,5	5,5	8	20	35

■ = preferred  
h = Height of brackets


in mm

## ACCESSORIES FOR BOLT MOUNTING (Other accessories on request)


**Cap Nut**  
Order Code: ACCNUT3038M12  
For Screw Capacitors with M12 Bolt




**Cap Nut**  
Order Code: ACCNUT2230M12  
For Screw Capacitors with M12 Bolt




**Insulation Washer**  
Order Code: ACCISO5113  
For Screw Capacitors with Diameter 51 and 64



**Insulation Washer**  
Order Code: ACCISO7713  
For Screw Capacitors with Diameter 77 and 90




### Press Ring

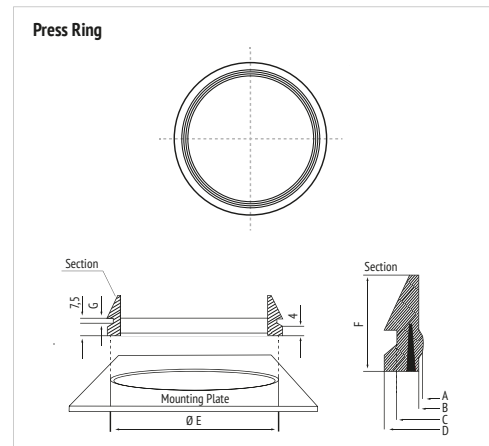

Ø Capacitor	64	77	90
A +0,3	62,3	74,8	88,0
B +0,3	64,1	77,0	90,0
C +0,3	70,5	84,5	97,9
D +0,3	74,5	88,6	102,0
E +0,2	71,2	85,5	98,6
F +0,2	18,0	20,0	23,5
G -0,25	3,0	2,4	3,0
<b>Product Code</b> Agree with RoHS	ACC PR164	ACC PR177	ACC PR190
<b>Product Code</b> Agree with RoHS and UL-94-V0	ACC PR464	ACC PR477	ACC PR490

All dimensions in mm

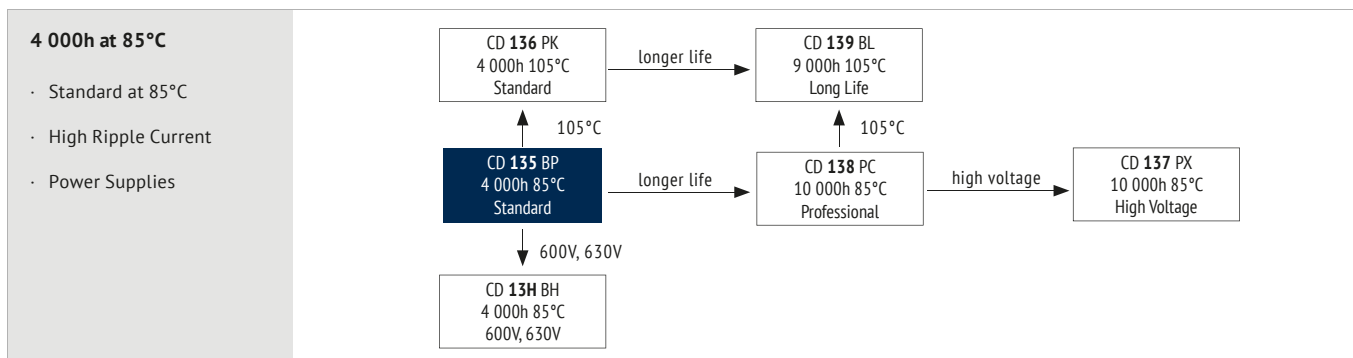


**ITEM CHARACTERISTICS**

Operating Temperature Range (°C)	-40 ~ +85	-25 ~ +85
Voltage Range (V)	10 ~ 250	350 ~ 500
Capacitance Range (µF)	270 ~ 820 000	
Capacitance Tolerance (20°C, 120Hz)	± 20%	

**!** The usage at lower temperatures than indicated may be possible. Please contact the Jianghai Europe sales office for approval.

Leakage Current: After 5 minutes at 20°C application of rated voltage, leakage current is not more than specified in table.

Fast Charge-Discharge: **!** Please contact Jianghai for an appropriate choice of the capacitor or possible technical adaptations, esp. for applications like: Welding, Photoflash, Servo motors, X-Ray

**ITEM USEFUL LIFE LOAD LIFE ENDURANCE TEST SHELF LIFE**

Lifetime	4 000h	> 65 000h	2 000h	2 000h	1 000h
Leakage Current	Not more than specified value		Not more than specified value	Not more than specified value	Not more than specified value
Capacitance Change	Within ± 30% of initial value		Within ± 20% of initial value	Within ± 10% of initial value	Within ± 20% of initial value
Dissipation Factor	Not more than 300% of specified value		Not more than 200% of specified value	Not more than 200% of specified value	Not more than 200% of specified value
Condition: Applied Voltage Applied Current Applied Temperature	$U_R$ $I_R$ 85°C	$U_R$ $1,2 \times I_R$ 40°C	$U_R$ $I_R$ 85°C	$U_R$ $I_R = 0$ 85°C IEC 60384	$U_R = 0$ $I_R = 0$ 85°C After test: $U_R$ to be applied for 30 min > 24h before measurement


Terminal and Construction: The terminal version has an impact on the current capability and mechanical behavior (vibration). For high current applications the terminals C,D and E are preferred, see page 139.

Optional: Self-extinguishing Electrolyte on request

**SCREW**
**MULTIPLIER FOR RIPPLE CURRENT (FREQUENCY COEFFICIENT)**

Frequency	50Hz	120Hz	300Hz	1kHz	3kHz	5kHz	≥ 10 kHz
Rated Voltage (V)							
10 ~ 50	0,95	1,00	1,04	1,10	1,12	1,13	1,15
63 ~ 100	0,95	1,00	1,06	1,16	1,22	1,26	1,30
160 ~ 500	0,80	1,00	1,10	1,25	1,35	1,40	1,50

Multipliers for typical operating conditions.

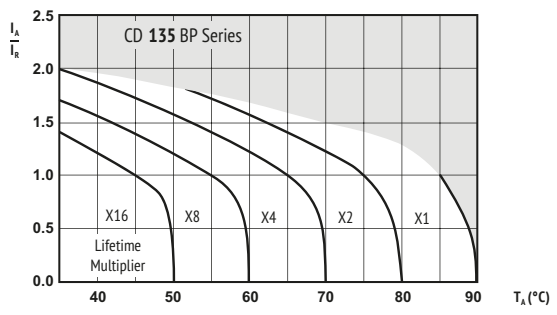**MULTIPLIER FOR LIFETIME (LIFETIME DIAGRAM)**


$I_A$  = actual ripple current at 120Hz,  
 $I_R$  = rated ripple current at 120Hz, 85°C  
 Multiplier of Useful Life as a function of ambient temperature & ripple current load

**ENVIRONMENTAL**

The products are RoHS, WEEE and RECh compliant. The detailed version please see separate "Environmental Certificates" document or [www.jianghai-europe.com](http://www.jianghai-europe.com)

**! SAFETY FACTOR**

This diagram includes a safety margin. In many cases the allowed current capability/lifetime may be increased. For details and approvals please contact the Jianghai Europe sales office.




U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 85°C 120Hz	Size øD x L	ORDER CODE ◇ = mounting style (stud) △△△△ = terminal style Details: Page 138
(V)	(µF)	(mΩ)	(mΩ)		(mA)	(Arms)	(mm)	
<b>10</b> <b>(13)</b> <b>1A</b>	33 000	33	21	0,80	3,3	4,3	36 x 53	ECG1ABP333M◇A053△△△△
	39 000	28	18	0,80	3,9	4,7	36 x 53	ECG1ABP393M◇A053△△△△
	47 000	23	15	0,80	4,7	5,2	36 x 65	ECG1ABP473M◇A065△△△△
	56 000	19	13	0,80	5,0	6,1	36 x 83	ECG1ABP563M◇A083△△△△
	68 000	16	10	0,80	5,0	6,7	36 x 83	ECG1ABP683M◇A083△△△△
	82 000	13	9,0	0,80	5,0	7,7	36 x 100	ECG1ABP823M◇A100△△△△
	100 000	11	8,0	0,80	5,0	8,8	36 x 100	ECG1ABP104M◇A100△△△△
	120 000	8,9	7,0	0,80	5,0	10,0	36 x 121	ECG1ABP124M◇A121△△△△
	150 000	8,9	7,0	1,00	5,0	10,8	36 x 121	ECG1ABP154M◇A121△△△△
	180 000	7,4	6,0	1,00	5,0	12,0	51 x 96	ECG1ABP184M◇C096△△△△
	220 000	9,1	5,0	1,50	5,0	11,2	51 x 121	ECG1ABP224M◇C121△△△△
	270 000	7,4	4,0	1,50	5,0	12,8	51 x 121	ECG1ABP274M◇C121△△△△
	330 000	6,1	4,0	1,50	5,0	15,3	64 x 96	ECG1ABP334M◇D096△△△△
	390 000	5,2	3,0	1,50	5,0	17,3	64 x 115	ECG1ABP394M◇D115△△△△
	470 000	5,7	3,0	2,00	5,0	16,7	64 x 130	ECG1ABP474M◇D130△△△△
560 000	4,8	3,0	2,00	5,0	19,0	77 x 115	ECG1ABP564M◇E115△△△△	
680 000	4,0	3,0	2,00	5,0	21,7	77 x 130	ECG1ABP684M◇E130△△△△	
820 000	3,3	2,0	2,00	5,0	24,7	77 x 155	ECG1ABP824M◇E155△△△△	
<b>16</b> <b>(20)</b> <b>1C</b>	22 000	37	22	0,60	3,5	4,1	36 x 53	ECG1CBP223M◇A053△△△△
	27 000	30	19	0,60	4,3	4,5	36 x 53	ECG1CBP273M◇A053△△△△
	33 000	25	16	0,60	5,0	5,0	36 x 53	ECG1CBP333M◇A053△△△△
	39 000	21	13	0,60	5,0	5,9	36 x 65	ECG1CBP393M◇A065△△△△
	47 000	17	11	0,60	5,0	6,4	36 x 83	ECG1CBP473M◇A083△△△△
	56 000	15	10	0,60	5,0	7,3	36 x 83	ECG1CBP563M◇A083△△△△
	68 000	12	8,0	0,60	5,0	8,4	36 x 100	ECG1CBP683M◇A100△△△△
	82 000	13	7,0	0,80	5,0	8,3	36 x 100	ECG1CBP823M◇A100△△△△
	100 000	11	6,0	0,80	5,0	9,5	36 x 121	ECG1CBP104M◇A121△△△△
	120 000	8,9	5,0	0,80	5,0	10,9	36 x 121	ECG1CBP124M◇A121△△△△
	150 000	8,9	4,0	1,00	5,0	11,3	51 x 96	ECG1CBP154M◇C096△△△△
	180 000	7,4	3,0	1,00	5,0	12,8	51 x 115	ECG1CBP184M◇C115△△△△
	220 000	6,1	3,0	1,00	5,0	15,3	51 x 130	ECG1CBP224M◇C130△△△△
	270 000	5,0	3,0	1,00	5,0	17,6	64 x 96	ECG1CBP274M◇D096△△△△
	330 000	6,1	3,0	1,50	5,0	16,8	64 x 115	ECG1CBP334M◇D115△△△△
390 000	5,2	3,0	1,50	5,0	18,3	64 x 130	ECG1CBP394M◇D130△△△△	
470 000	4,3	2,0	1,50	5,0	21,3	77 x 115	ECG1CBP474M◇E115△△△△	
560 000	3,6	2,0	1,50	5,0	23,6	77 x 130	ECG1CBP564M◇E130△△△△	
680 000	3,0	2,0	1,50	5,0	27,6	77 x 155	ECG1CBP684M◇E155△△△△	
820 000	3,3	2,0	2,00	5,0	27,1	90 x 157	ECG1CBP824M◇F157△△△△	
<b>25</b> <b>(32)</b> <b>1E</b>	15 000	45	22	0,50	3,8	3,7	36 x 53	ECG1EBP153M◇A053△△△△
	18 000	37	18	0,50	4,5	4,1	36 x 53	ECG1EBP183M◇A053△△△△
	22 000	31	16	0,50	5,0	4,5	36 x 53	ECG1EBP223M◇A053△△△△
	27 000	25	13	0,50	5,0	5,0	36 x 65	ECG1EBP273M◇A065△△△△
	33 000	21	11	0,50	5,0	5,9	36 x 83	ECG1EBP333M◇A083△△△△
	39 000	18	9,0	0,50	5,0	6,7	36 x 83	ECG1EBP393M◇A083△△△△
	47 000	15	8,0	0,50	5,0	7,7	36 x 100	ECG1EBP473M◇A100△△△△
	56 000	15	7,0	0,60	5,0	7,9	36 x 100	ECG1EBP563M◇A100△△△△
	68 000	12	6,0	0,60	5,0	9,1	36 x 121	ECG1EBP683M◇A121△△△△
	82 000	9,8	5,0	0,60	5,0	10,4	36 x 121	ECG1EBP823M◇A121△△△△
	100 000	11	4,0	0,80	5,0	10,3	51 x 96	ECG1EBP104M◇C096△△△△
	120 000	8,9	4,0	0,80	5,0	11,7	51 x 115	ECG1EBP124M◇C115△△△△
	150 000	7,1	3,0	0,80	5,0	14,1	51 x 130	ECG1EBP154M◇C130△△△△
	180 000	5,9	3,0	0,80	5,0	15,7	64 x 96	ECG1EBP184M◇D096△△△△
	220 000	6,1	3,0	1,00	5,0	16,1	64 x 115	ECG1EBP224M◇D115△△△△
270 000	5,0	3,0	1,00	5,0	18,6	64 x 130	ECG1EBP274M◇D130△△△△	
330 000	4,1	3,0	1,00	5,0	21,9	64 x 155	ECG1EBP334M◇D155△△△△	
390 000	4,1	2,0	1,20	5,0	22,0	77 x 115	ECG1EBP394M◇E115△△△△	
470 000	3,4	2,0	1,20	5,0	25,6	77 x 155	ECG1EBP474M◇E155△△△△	
560 000	2,9	2,0	1,20	5,0	27,9	90 x 131	ECG1EBP564M◇F131△△△△	
680 000	2,4	2,0	1,20	5,0	32,5	90 x 157	ECG1EBP684M◇F157△△△△	
<b>35</b> <b>(44)</b> <b>1V</b>	10 000	54	24	0,40	3,5	3,4	36 x 53	ECG1VBP103M◇A053△△△△
	12 000	45	20	0,40	4,2	3,7	36 x 53	ECG1VBP123M◇A053△△△△
	15 000	36	17	0,40	5,0	4,2	36 x 65	ECG1VBP153M◇A065△△△△
	18 000	30	14	0,40	5,0	4,7	36 x 83	ECG1VBP183M◇A083△△△△
	22 000	25	12	0,40	5,0	5,7	36 x 83	ECG1VBP223M◇A083△△△△
	27 000	20	9,0	0,40	5,0	6,3	36 x 100	ECG1VBP273M◇A100△△△△
	33 000	17	9,0	0,40	5,0	7,2	36 x 100	ECG1VBP333M◇A100△△△△

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 85°C 120Hz	Size øD x L	ORDER CODE ◇ = mounting style (stud) △△△△ = terminal style Details: Page 138
(V)	(µF)	(mΩ)	(mΩ)		(mA)	(Arms)	(mm)	
<b>35</b> <b>(44)</b> <b>1V</b>	39 000	18	8,0	0,50	5,0	8,3	36 x 121	ECG1VBP393M◇A121△△△△
	47 000	15	8,0	0,50	5,0	8,7	51 x 96	ECG1VBP473M◇C096△△△△
	56 000	15	8,0	0,60	5,0	8,6	51 x 96	ECG1VBP563M◇C096△△△△
	68 000	12	6,0	0,60	5,0	9,8	51 x 115	ECG1VBP683M◇C115△△△△
	82 000	9,8	5,0	0,60	5,0	11,6	64 x 96	ECG1VBP823M◇D096△△△△
	100 000	8,0	4,0	0,60	5,0	13,3	64 x 115	ECG1VBP104M◇D115△△△△
	120 000	6,7	4,0	0,60	5,0	14,8	64 x 121	ECG1VBP124M◇D121△△△△
	150 000	7,1	4,0	0,80	5,0	14,9	64 x 130	ECG1VBP154M◇D130△△△△
	180 000	5,9	3,0	0,80	5,0	17,0	77 x 115	ECG1VBP184M◇E115△△△△
	220 000	4,9	3,0	0,80	5,0	20,0	77 x 130	ECG1VBP224M◇E130△△△△
	270 000	5,0	3,0	1,00	5,0	20,3	77 x 155	ECG1VBP274M◇E155△△△△
	330 000	4,1	2,0	1,00	5,0	23,5	90 x 131	ECG1VBP334M◇F131△△△△
	390 000	3,5	2,0	1,00	5,0	26,4	90 x 157	ECG1VBP394M◇F157△△△△
	470 000	2,9	2,0	1,00	5,0	29,6	90 x 157	ECG1VBP474M◇F157△△△△
	<b>50</b> <b>(63)</b> <b>1H</b>	5 600	72	46	0,30	2,8	3,0	36 x 53
6 800		59	38	0,30	3,4	3,3	36 x 53	ECG1HBP682M◇A053△△△△
8 200		49	31	0,30	4,1	3,6	36 x 53	ECG1HBP822M◇A053△△△△
10 000		40	26	0,30	5,0	4,0	36 x 65	ECG1HBP103M◇A065△△△△
12 000		34	22	0,30	5,0	4,7	36 x 83	ECG1HBP123M◇A083△△△△
15 000		27	15	0,30	5,0	5,5	36 x 83	ECG1HBP153M◇A083△△△△
18 000		23	12	0,30	5,0	6,2	36 x 100	ECG1HBP183M◇A100△△△△
22 000		25	11	0,40	5,0	6,3	36 x 121	ECG1HBP223M◇A121△△△△
27 000		20	10	0,40	5,0	7,1	36 x 121	ECG1HBP273M◇A121△△△△
33 000		17	9,0	0,40	5,0	8,2	51 x 96	ECG1HBP333M◇C096△△△△
39 000		18	8,0	0,50	5,0	8,1	51 x 96	ECG1HBP393M◇C096△△△△
47 000		15	8,0	0,50	5,0	9,3	51 x 115	ECG1HBP473M◇C115△△△△
56 000		12	6,0	0,50	5,0	10,5	64 x 96	ECG1HBP563M◇D096△△△△
68 000		9,8	5,0	0,50	5,0	12,0	64 x 96	ECG1HBP683M◇D096△△△△
82 000		8,1	4,0	0,50	5,0	13,7	64 x 115	ECG1HBP823M◇D115△△△△
100 000	8,0	4,0	0,60	5,0	14,7	77 x 115	ECG1HBP104M◇E115△△△△	
120 000	6,7	3,0	0,60	5,0	16,7	77 x 115	ECG1HBP124M◇E115△△△△	
150 000	5,4	3,0	0,60	5,0	19,3	77 x 130	ECG1HBP154M◇E130△△△△	
180 000	4,5	3,0	0,60	5,0	21,9	77 x 155	ECG1HBP184M◇E155△△△△	
220 000	3,7	2,0	0,60	5,0	21,4	90 x 131	ECG1HBP224M◇F131△△△△	
270 000	3,0	2,0	0,60	5,0	24,6	90 x 157	ECG1HBP274M◇F157△△△△	
<b>63</b> <b>(79)</b> <b>1J</b>	3 900	86	47	0,25	2,5	2,7	36 x 53	ECG1JBP392M◇A053△△△△
	4 700	71	39	0,25	3,0	3,0	36 x 53	ECG1JBP472M◇A053△△△△
	5 600	60	38	0,25	3,5	3,3	36 x 53	ECG1JBP562M◇A053△△△△
	6 800	49	32	0,25	4,3	3,6	36 x 65	ECG1JBP682M◇A065△△△△
	8 200	41	26	0,25	5,0	4,3	36 x 83	ECG1JBP822M◇A083△△△△
	10 000	34	23	0,25	5,0	4,9	36 x 83	ECG1JBP103M◇A083△△△△
	12 000	28	18	0,25	5,0	5,6	36 x 100	ECG1JBP123M◇A100△△△△
15 000	27	16	0,30	5,0	5,9	36 x 100	ECG1JBP153M◇A100△△△△	
18 000	23	15	0,30	5,0	6,7	36 x 121	ECG1JBP183M◇A121△△△△	
22 000	19	13	0,30	5,0	7,8	36 x 121	ECG1JBP223M◇A121△△△△	
27 000	20	12	0,40	5,0	7,4	51 x 96	ECG1JBP273M◇C096△△△△	
33 000	17	8,0	0,40	5,0	8,4	51 x 96	ECG1JBP333M◇C096△△△△	
39 000	14	7,0	0,40	5,0	9,5	51 x 115	ECG1JBP393M◇C115△△△△	
47 000	12	6,0	0,40	5,0	11,3	51 x 130	ECG1JBP473M◇C130△△△△	
56 000	9,5	6,0	0,40	5,0	12,8	64 x 115	ECG1JBP563M◇D115△△△△	
68 000	9,8	5,0	0,50	5,0	12,7	64 x 121	ECG1JBP683M◇D121△△△△	
82 000	8,1	4,0	0,50	5,0	14,5	64 x 130	ECG1JBP823M◇D130△△△△	
100 000	6,7	4,0	0,50	5,0	16,7	77 x 115	ECG1JBP104M◇E115△△△△	
120 000	5,6	3,0	0,50	5,0	18,9	77 x 130	ECG1JBP124M◇E130△△△△	
150 000	4,5	2,0	0,50	5,0	22,4	77 x 155	ECG1JBP154M◇E155△△△△	
180 000	4,5	2,0	0,60	5,0	22,4	90 x 131	ECG1JBP184M◇F131△△△△	
220 000	3,7	2,0	0,60	5,0	26,2	90 x 157	ECG1JBP224M◇F157△△△△	
<b>80</b> <b>(100)</b> <b>1K</b>	3 300							



U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 85°C 120Hz	Size øD x L	ORDER CODE ◇ = mounting style (stud) △△△ = terminal style	
(V)	(µF)	(mΩ)	(mΩ)		(mA)	(Arms)	(mm)	Details: Page 138	
<b>80</b> <b>(100)</b> <b>1K</b>	18 000	19	10	0,25	5,0	7,8	36 x 121	ECG1KBP183M◇A121△△△	
	22 000	19	10	0,30	5,0	8,0	51 x 96	ECG1KBP223M◇C096△△△	
	27 000	15	8,0	0,30	5,0	9,2	51 x 96	ECG1KBP273M◇C096△△△	
	33 000	13	7,0	0,30	5,0	10,5	51 x 115	ECG1KBP333M◇C115△△△	
	39 000	11	6,0	0,30	5,0	12,0	51 x 130	ECG1KBP393M◇C130△△△	
	47 000	8,5	5,0	0,30	5,0	13,6	64 x 115	ECG1KBP473M◇D115△△△	
	56 000	9,5	4,0	0,40	5,0	13,4	64 x 130	ECG1KBP563M◇D130△△△	
	68 000	7,9	4,0	0,40	5,0	15,4	77 x 115	ECG1KBP683M◇E115△△△	
	82 000	6,5	4,0	0,40	5,0	17,5	77 x 130	ECG1KBP823M◇E130△△△	
	100 000	5,4	3,0	0,40	5,0	20,5	77 x 155	ECG1KBP104M◇E155△△△	
	120 000	4,5	2,0	0,40	5,0	22,4	90 x 131	ECG1KBP124M◇F131△△△	
	150 000	3,6	2,0	0,40	5,0	26,5	90 x 157	ECG1KBP154M◇F157△△△	
	<b>100</b> <b>(125)</b> <b>2A</b>	1 800	185	48	0,25	1,8	1,9	36 x 53	ECG2ABP182M◇A053△△△
		2 200	151	44	0,25	2,2	2,1	36 x 53	ECG2ABP222M◇A053△△△
		2 700	123	39	0,25	2,7	2,3	36 x 53	ECG2ABP272M◇A053△△△
3 300		101	35	0,25	3,3	2,6	36 x 65	ECG2ABP332M◇A065△△△	
3 900		86	28	0,25	3,9	3,0	36 x 83	ECG2ABP392M◇A083△△△	
4 700		71	26	0,25	4,7	3,5	36 x 83	ECG2ABP472M◇A083△△△	
5 600		60	23	0,25	5,0	3,9	36 x 100	ECG2ABP562M◇A100△△△	
6 800		49	22	0,25	5,0	4,5	36 x 100	ECG2ABP682M◇A100△△△	
8 200		41	20	0,25	5,0	5,1	36 x 121	ECG2ABP822M◇A121△△△	
10 000		34	19	0,25	5,0	5,9	36 x 121	ECG2ABP103M◇A121△△△	
12 000		28	16	0,25	5,0	6,4	51 x 75	ECG2ABP123M◇C075△△△	
15 000		23	12	0,25	5,0	7,0	51 x 96	ECG2ABP153M◇C096△△△	
18 000		19	10	0,25	5,0	8,3	51 x 115	ECG2ABP183M◇C115△△△	
22 000		16	8,0	0,25	5,0	10,0	51 x 130	ECG2ABP223M◇C130△△△	
27 000		13	7,0	0,25	5,0	11,5	64 x 115	ECG2ABP273M◇D115△△△	
33 000		11	6,0	0,25	5,0	11,9	64 x 130	ECG2ABP333M◇D130△△△	
39 000		8,6	5,0	0,25	5,0	13,4	77 x 115	ECG2ABP393M◇E115△△△	
47 000		9,9	5,0	0,35	5,0	14,2	77 x 130	ECG2ABP473M◇E130△△△	
56 000	8,3	4,0	0,35	5,0	16,0	77 x 155	ECG2ABP563M◇E155△△△		
68 000	6,9	3,0	0,35	5,0	18,8	90 x 131	ECG2ABP683M◇F131△△△		
82 000	5,7	3,0	0,35	5,0	20,5	90 x 157	ECG2ABP823M◇F157△△△		
100 000	4,7	3,0	0,35	5,0	24,0	90 x 171	ECG2ABP104M◇F171△△△		
<b>160</b> <b>(200)</b> <b>2C</b>	3 300	101	31	0,25	5,0	5,2	36 x 121	ECG2CBP332M◇A121△△△	
	4 700	71	21	0,25	5,0	5,9	51 x 75	ECG2CBP472M◇C075△△△	
	5 600	60	19	0,25	5,0	7,0	51 x 96	ECG2CBP562M◇C096△△△	
	6 800	49	16	0,25	5,0	7,8	51 x 96	ECG2CBP682M◇C096△△△	
	10 000	34	13	0,25	5,0	10,4	64 x 96	ECG2CBP103M◇D096△△△	
	12 000	28	10	0,25	5,0	11,3	51 x 120	ECG2CBP123M◇C120△△△	
	15 000	23	9,0	0,25	5,0	14,3	64 x 130	ECG2CBP153M◇D130△△△	
	18 000	19	8,0	0,25	5,0	15,6	64 x 130	ECG2CBP183M◇D130△△△	
	22 000	16	6,0	0,25	5,0	18,3	77 x 130	ECG2CBP223M◇E130△△△	
	33 000	11	4,0	0,25	5,0	23,8	90 x 131	ECG2CBP333M◇F131△△△	
	39 000	8,6	2,0	0,25	5,0	27,9	90 x 157	ECG2CBP393M◇F157△△△	
	<b>200</b> <b>(250)</b> <b>2D</b>	2 200	151	38	0,25	4,4	3,9	36 x 100	ECG2DBP222M◇A100△△△
3 300		101	24	0,25	5,0	4,9	51 x 75	ECG2DBP332M◇C075△△△	
4 700		71	20	0,25	5,0	6,4	51 x 96	ECG2DBP472M◇C096△△△	
5 600		60	18	0,25	5,0	7,6	51 x 115	ECG2DBP562M◇C115△△△	
6 800		49	14	0,25	5,0	8,8	51 x 130	ECG2DBP682M◇C130△△△	
8 200		41	11	0,25	5,0	9,4	64 x 96	ECG2DBP822M◇D096△△△	
10 000		34	9,0	0,25	5,0	10,4	64 x 96	ECG2DBP103M◇D096△△△	
15 000		23	7,0	0,25	5,0	14,4	77 x 96	ECG2DBP153M◇E096△△△	
18 000		19	6,0	0,25	5,0	16,5	77 x 130	ECG2DBP183M◇E130△△△	
22 000		16	4,0	0,25	5,0	19,6	77 x 155	ECG2DBP223M◇E155△△△	
33 000		11	3,0	0,25	5,0	25,3	90 x 157	ECG2DBP333M◇F157△△△	
<b>250</b> <b>(300)</b> <b>2E</b>		1 500	222	49	0,25	3,8	3,2	36 x 100	ECG2EBP152M◇A100△△△
	2 200	151	33	0,25	5,0	4,0	51 x 75	ECG2EBP222M◇C075△△△	
	3 300	101	23	0,25	5,0	5,4	51 x 96	ECG2EBP332M◇C096△△△	
	3 900	86	17	0,25	5,0	6,3	51 x 115	ECG2EBP392M◇C115△△△	
	4 700	71	17	0,25	5,0	7,1	64 x 96	ECG2EBP472M◇D096△△△	
	6 800	49	12	0,25	5,0	9,1	64 x 115	ECG2EBP682M◇D115△△△	
	8 200	41	11	0,25	5,0	10,0	64 x 115	ECG2EBP822M◇D115△△△	
	10 000	34	11	0,25	5,0	11,7	64 x 130	ECG2EBP103M◇D130△△△	

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 85°C 120Hz	Size øD x L	ORDER CODE ◇ = mounting style (stud) △△△ = terminal style
(V)	(µF)	(mΩ)	(mΩ)		(mA)	(Arms)	(mm)	Details: Page 138
<b>250</b> <b>(300)</b> <b>2E</b>	15 000	23	7,0	0,25	5,0	15,1	77 x 130	ECG2EBP153M◇E130△△△
	18 000	19	6,0	0,25	5,0	17,7	77 x 155	ECG2EBP183M◇E155△△△
	22 000	16	3,0	0,25	5,0	20,9	90 x 157	ECG2EBP223M◇F157△△△
<b>350</b> <b>(400)</b> <b>2V</b>	470	565	228	0,20	1,6	2,2	36 x 83	ECG2VBP471M◇A083△△△
	680	391	152	0,20	2,4	2,6	36 x 83	ECG2VBP681M◇A083△△△
	820	324	104	0,20	2,9	3,1	36 x 100	ECG2VBP821M◇A100△△△
	1 500	177	72	0,20	5,0	4,3	51 x 75	ECG2VBP152M◇C075△△△
	1 800	148	58	0,20	5,0	5,1	51 x 96	ECG2VBP182M◇C096△△△
	2 200	121	48	0,20	5,0	5,7	51 x 96	ECG2VBP222M◇C096△△△
	2 700	99	39	0,20	5,0	7,1	51 x 130	ECG2VBP272M◇C130△△△
	3 300	81	32	0,20	5,0	7,9	51 x 130	ECG2VBP332M◇C130△△△
	3 900	69	28	0,20	5,0	9,0	64 x 115	ECG2VBP392M◇D115△△△
	4 700	57	25	0,20	5,0	10,3	64 x 130	ECG2VBP472M◇D130△△△
	5 600	48	22	0,20	5,0	11,4	77 x 115	ECG2VBP562M◇E115△△△
	6 800	40	17	0,20	5,0	13,1	77 x 130	ECG2VBP682M◇E130△△△
8 200	33	14	0,20	5,0	15,4	77 x 155	ECG2VBP822M◇E155△△△	
10 000	27	12	0,20	5,0	18,1	90 x 157	ECG2VBP103M◇F157△△△	
12 000	23	10	0,20	5,0	20,0	90 x 157	ECG2VBP123M◇F157△△△	
15 000	18	8,0	0,20	5,0	24,5	90 x 196	ECG2VBP153M◇F196△△△	
18 000	15	6,0	0,20	5,0	28,8	90 x 236	ECG2VBP183M◇F236△△△	
<b>400</b> <b>(450)</b> <b>2G</b>	470	565	178	0,20	1,9	2,2	36 x 83	ECG2GBP471M◇A083△△△
	680	391	119	0,20	2,7	2,8	36 x 100	ECG2GBP681M◇A100△△△
	1 000	266	82	0,20	4,0	3,5	51 x 75	ECG2GBP102M◇C075△△△
	1 200	222	68	0,20	4,8	3,8	51 x 96	ECG2GBP122M◇C075△△△
	1 500	177	58	0,20	5,0	4,7	51 x 96	ECG2GBP152M◇C096△△△
	1 800	148	47	0,20	5,0	5,2	51 x 96	ECG2GBP182M◇C096△△△
	2 200	121	35	0,20	5,0	6,4	51 x 120	ECG2GBP222M◇C120△△△
	2 700	99	33	0,20	5,0	7,0	64 x 96	ECG2GBP272M◇D096△△△
	3 300	81	31	0,20	5,0	8,2	64 x 115	ECG2GBP332M◇D115△△△
	3 900	69	25	0,20	5,0	9,4	64 x 130	ECG2GBP392M◇D130△△△
	4 700	57	24	0,20	5,0	10,4	77 x 115	ECG2GBP472M◇E115△△△
	5 600	48	19	0,20	5,0	11,9	77 x 130	ECG2GBP562M◇E130△△△
6 800	40	16	0,20	5,0	14,1	77 x 155	ECG2GBP682M◇E155△△△	
8 200	33	14	0,20	5,0	16,4	90 x 157	ECG2GBP822M◇F157△△△	
10 000	27	11	0,20	5,0	18,3	90 x 157	ECG2GBP103M◇F157△△△	
12 000	23	10	0,20	5,0	21,8	90 x 196	ECG2GBP123M◇F196△△△	
15 000	18	8,0	0,20	5,0	26,3	90 x 236	ECG2GBP153M◇F236△△△	
<b>450</b> <b>(500)</b> <b>2W</b>	470	565	200	0,20	2,1	2,2	36 x 83	ECG2WBP471M◇A083△△△
	680	391	140	0,20	3,1	2,8	36 x 100	ECG2WBP681M◇A100△△△
	820	324	96	0,20	3,7	3,2	51 x 75	ECG2WBP821M◇C075△△△
	1 000	266	82	0,20	4,5	3,5	51 x 75	ECG2WBP102M◇C075△△△
	1 200	222	72	0,20	5,0	4,2	51 x 96	ECG2WBP122M◇C096△△△
	1 500	177	58	0,20	5,0	5,1	51 x 115	ECG2WBP152M◇C115△△△
	1 800	148	46	0,20	5,0	5,9	51 x 130	ECG2WBP182M◇C130△△△
	2 200	121	33	0,20	5,0	6,3	64 x 96	ECG2WBP222M◇D096△△△
	2 700	99	32	0,20	5,0	7,5	64 x 115	ECG2WBP272M◇D115△△△
	3 300	81	30	0,20	5,0	8,7	64 x 130	ECG2WBP332M◇D130△△△
	3 900	69	29	0,20	5,0	9,5	77 x 115	ECG2WBP392M◇E115△△△
	4 700	57	24	0,20	5,0	10,9	77 x 130	ECG2WBP472M◇E130△△△
5 600	48	16	0,20	5,0	12,8	77 x 155		

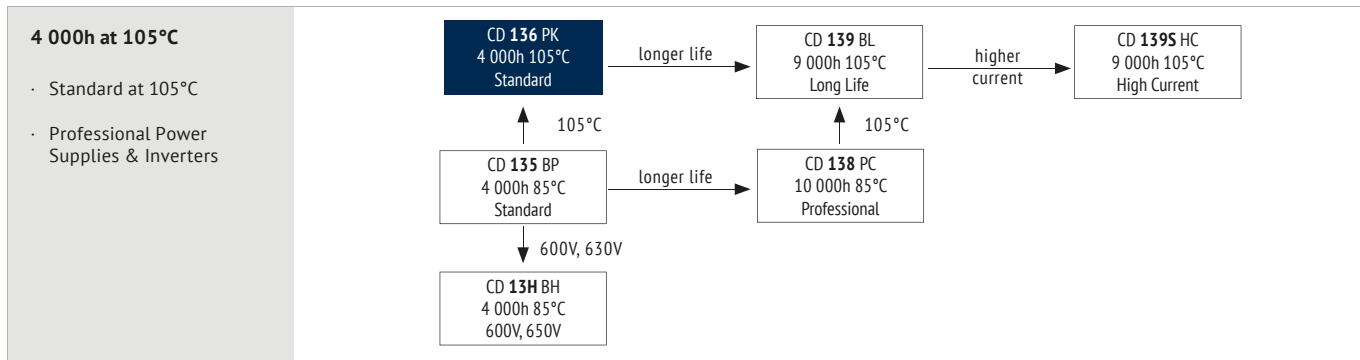

**ITEM CHARACTERISTICS**

Operating Temperature Range (°C)	-40 ~ +105	-25 ~ +105
Voltage Range (V)	25 ~ 100	160 ~ 450
Capacitance Range (µF)	220 ~ 330 200	
Capacitance Tolerance (20°C, 120Hz)	± 20%	

**!** The usage at lower temperatures than indicated may be possible. Please contact the Jianghai Europe sales office for approval.

Leakage Current: After 5 minutes at 20°C application of rated voltage, leakage current is not more than specified in table.

Fast Charge-Discharge: **!** Please contact Jianghai for an appropriate choice of the capacitor or possible technical adaptations, esp. for applications like: Welding, Photoflash, Servo motors, X-Ray

ITEM	USEFUL LIFE		LOAD LIFE	ENDURANCE TEST	SHELF LIFE	
Lifetime	4 000h	> 200 000h	2 000h	2 000h	1 000h	
Leakage Current	Not more than specified value		Not more than specified value	Not more than specified value	Not more than specified value	
Capacitance Change	Within ± 30% of initial value		Within ± 20% of initial value	Within ± 10% of initial value	Within ± 20% of initial value	
Dissipation Factor	Not more than 300% of specified value		Not more than 200% of specified value	Not more than 130% of specified value	Not more than 200% of specified value	
Condition: Applied Voltage Applied Current Applied Temperature	$U_R$ $I_R$ 105°C	$U_R$ $1,2 \times I_R$ 40°C	$U_R$ $I_R$ 105°C	$U_R$ $I_R = 0$ 105°C IEC 60384	$U_R = 0$ $I_R = 0$ 105°C	After test: $U_R$ to be applied for 30 min > 24h before measurement


Terminal and Construction: The terminal version has an impact on the current capability and mechanical behavior (vibration). For high current applications the terminals C,D and E are preferred, see page 139.

**MULTIPLIER FOR RIPPLE CURRENT (FREQUENCY COEFFICIENT)**

Frequency	50Hz	120Hz	300Hz	1kHz	≥ 10 kHz
Rated Voltage (V)					
25 ~ 100	0,95	1,00	1,04	1,10	1,15
160 ~ 250	0,95	1,00	1,08	1,15	1,20
350 ~ 450	0,80	1,00	1,18	1,35	1,40

Multipliers for typical operating conditions.

**MULTIPLIER FOR LIFETIME (LIFETIME DIAGRAM)**

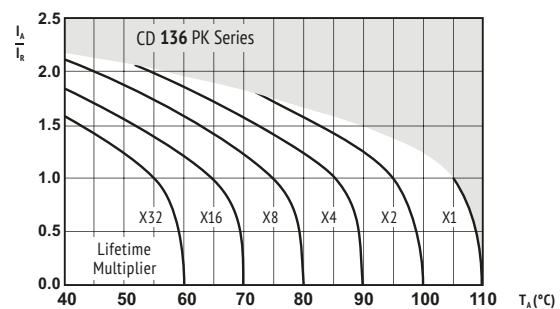

$I_a$  = actual ripple current at 120Hz,  
 $I_R$  = rated ripple current at 120Hz, 105°C  
 Multiplier of Useful Life as a function of ambient temperature & ripple current load

**ENVIRONMENTAL**

The products are RoHS, WEEE and REACH compliant. The detailed version please see separate "Environmental Certificates" document or [www.jianghai-europe.com](http://www.jianghai-europe.com)

**! SAFETY FACTOR**

This diagram includes a safety margin. In many cases the allowed current capability/lifetime may be increased. For details and approvals please contact the Jianghai Europe sales office.






U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 105°C 120Hz	Size øD x L (mm)	ORDER CODE ◇ = mounting style (stud) △△△ = terminal style Details: Page 138
<b>25</b> (32) 1E	10 000	47	25	0,35	2,5	2,9	36 x 53	ECG1EPK103M◇A053△△△
	15 000	31	20	0,35	3,8	4,2	36 x 83	ECG1EPK153M◇A083△△△
	22 000	25	13	0,40	5,0	5,1	36 x 83	ECG1EPK223M◇A083△△△
	33 000	17	10	0,40	5,0	6,3	36 x 100	ECG1EPK333M◇A100△△△
	47 000	12	4,0	0,40	5,0	8,0	51 x 75	ECG1EPK473M◇C075△△△
	68 000	9,8	6,0	0,50	5,0	10,0	51 x 115	ECG1EPK683M◇C115△△△
	100 000	8,0	5,0	0,60	5,0	11,3	64 x 96	ECG1EPK104M◇D096△△△
	150 000	7,1	4,0	0,80	5,0	12,9	64 x 115	ECG1EPK154M◇D115△△△
	220 000	6,1	3,0	1,00	5,0	14,8	77 x 115	ECG1EPK224M◇E115△△△
	330 000	4,1	2,0	1,00	5,0	19,9	90 x 131	ECG1EPK334M◇F131△△△
<b>35</b> (44) 1V	6 800	59	25	0,30	2,4	2,6	36 x 53	ECG1VPK682M◇A053△△△
	10 000	40	20	0,30	3,5	3,7	36 x 83	ECG1VPK103M◇A083△△△
	15 000	27	13	0,30	5,0	4,5	36 x 83	ECG1VPK153M◇A083△△△
	22 000	22	10	0,35	5,0	5,5	36 x 100	ECG1VPK223M◇A100△△△
	33 000	17	7,0	0,40	5,0	6,7	51 x 75	ECG1VPK333M◇C075△△△
	47 000	13	6,0	0,45	5,0	8,1	51 x 96	ECG1VPK473M◇C096△△△
	68 000	9,8	5,0	0,50	5,0	10,0	51 x 115	ECG1VPK683M◇C115△△△
	100 000	8,0	4,0	0,60	5,0	12,1	64 x 115	ECG1VPK104M◇D115△△△
	150 000	6,2	3,0	0,70	5,0	13,8	77 x 115	ECG1VPK154M◇E115△△△
	220 000	4,3	2,0	0,70	5,0	17,6	90 x 131	ECG1VPK224M◇F131△△△
<b>50</b> (63) 1H	3 300	81	50	0,20	1,7	2,2	36 x 53	ECG1HPK332M◇A053△△△
	4 700	71	36	0,25	2,4	3,3	36 x 53	ECG1HPK472M◇A053△△△
	6 800	49	32	0,25	3,4	3,4	36 x 83	ECG1HPK682M◇A083△△△
	10 000	34	22	0,25	5,0	4,1	36 x 83	ECG1HPK103M◇A083△△△
	15 000	27	14	0,30	5,0	4,9	36 x 100	ECG1HPK153M◇A100△△△
	22 000	22	10	0,35	5,0	5,9	51 x 75	ECG1HPK223M◇C075△△△
	33 000	17	7,0	0,40	5,0	7,8	51 x 115	ECG1HPK333M◇C115△△△
	47 000	12	6,0	0,40	5,0	9,5	64 x 96	ECG1HPK473M◇D096△△△
	68 000	8,8	5,0	0,45	5,0	11,6	64 x 115	ECG1HPK683M◇D115△△△
	100 000	6,7	4,0	0,50	5,0	14,1	77 x 115	ECG1HPK104M◇E115△△△
150 000	4,5	3,0	0,50	5,0	18,9	90 x 131	ECG1HPK154M◇F131△△△	
<b>63</b> (79) 1J	2 200	91	70	0,15	1,4	2,1	36 x 53	ECG1JPK222M◇A053△△△
	3 300	81	50	0,20	2,1	2,2	36 x 53	ECG1JPK332M◇A053△△△
	4 700	57	36	0,20	3,0	3,1	36 x 83	ECG1JPK472M◇A083△△△
	6 800	40	25	0,20	4,3	3,7	36 x 83	ECG1JPK682M◇A083△△△
	10 000	34	20	0,25	5,0	4,4	36 x 100	ECG1JPK103M◇A100△△△
	15 000	23	14	0,25	5,0	5,7	51 x 75	ECG1JPK153M◇C075△△△
	22 000	19	10	0,30	5,0	6,8	51 x 96	ECG1JPK223M◇C096△△△
	33 000	13	7,0	0,30	5,0	9,2	64 x 96	ECG1JPK333M◇D096△△△
	47 000	9,9	6,0	0,35	5,0	10,9	64 x 115	ECG1JPK473M◇D115△△△
	68 000	7,9	5,0	0,40	5,0	13,0	77 x 115	ECG1JPK683M◇E115△△△
100 000	5,4	4,0	0,40	5,0	17,2	90 x 131	ECG1JPK104M◇F131△△△	
<b>80</b> (100) 1K	2 200	91	57	0,15	1,8	2,1	36 x 53	ECG1KPK222M◇A053△△△
	3 300	61	38	0,15	2,6	3,0	36 x 83	ECG1KPK332M◇A083△△△
	4 700	43	27	0,15	3,8	3,6	36 x 83	ECG1KPK472M◇A083△△△
	6 800	40	19	0,20	5,0	4,0	36 x 100	ECG1KPK682M◇A100△△△
	10 000	27	17	0,20	5,0	5,2	51 x 75	ECG1KPK103M◇C075△△△
	15 000	23	11	0,25	5,0	6,2	51 x 96	ECG1KPK153M◇C096△△△
	22 000	16	8,0	0,25	5,0	8,2	64 x 96	ECG1KPK223M◇D096△△△
	33 000	13	7,0	0,30	5,0	9,7	77 x 96	ECG1KPK333M◇E096△△△
47 000	8,5	6,0	0,30	5,0	12,5	77 x 115	ECG1KPK473M◇E115△△△	
68 000	5,9	5,0	0,30	5,0	16,4	90 x 131	ECG1KPK683M◇F131△△△	
<b>100</b> (125) 2A	1 000	199	70	0,15	1,0	1,4	36 x 53	ECG2APK102M◇A053△△△
	1 500	133	55	0,15	1,5	1,7	36 x 53	ECG2APK152M◇A053△△△
	2 200	91	38	0,15	2,2	2,5	36 x 83	ECG2APK222M◇A083△△△
	3 300	61	25	0,15	3,3	3,0	36 x 83	ECG2APK332M◇A083△△△
	4 700	43	21	0,15	4,7	3,9	36 x 100	ECG2APK472M◇A100△△△
	6 800	30	19	0,15	5,0	5,0	51 x 75	ECG2APK682M◇C075△△△
	10 000	20	13	0,15	5,0	6,5	51 x 96	ECG2APK103M◇C096△△△
	15 000	18	9,0	0,20	5,0	7,6	64 x 96	ECG2APK153M◇D096△△△
	22 000	13	7,0	0,20	5,0	9,7	77 x 96	ECG2APK223M◇E096△△△
	33 000	11	6,0	0,25	5,0	11,8	77 x 130	ECG2APK333M◇E130△△△
	47 000	7,1	5,0	0,25	5,0	15,0	90 x 131	ECG2APK473M◇F131△△△

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 105°C 120Hz	Size øD x L (mm)	ORDER CODE ◇ = mounting style (stud) △△△ = terminal style Details: Page 138
<b>160</b> (200) 2C	470	424	265	0,15	0,8	1,0	36 x 53	ECG2CPK471M◇A053△△△
	680	293	186	0,15	1,1	1,1	36 x 53	ECG2CPK681M◇A053△△△
	1 000	199	125	0,15	1,6	1,7	36 x 83	ECG2CPK102M◇A083△△△
	1 500	133	85	0,15	2,4	2,0	36 x 83	ECG2CPK152M◇A083△△△
	2 200	91	55	0,15	3,5	2,7	36 x 100	ECG2CPK222M◇A100△△△
	3 300	61	38	0,15	5,0	3,5	51 x 83	ECG2CPK332M◇C083△△△
	4 700	43	35	0,15	5,0	4,4	51 x 96	ECG2CPK472M◇C096△△△
	6 800	30	25	0,15	5,0	5,9	64 x 96	ECG2CPK682M◇D096△△△
	10 000	20	15	0,15	5,0	7,6	77 x 96	ECG2CPK103M◇E096△△△
	15 000	14	11	0,15	5,0	10,3	77 x 130	ECG2CPK153M◇E130△△△
	22 000	9,1	6,0	0,15	5,0	13,2	90 x 131	ECG2CPK223M◇F131△△△
	<b>200</b> (250) 2D	330	603	375	0,15	0,7	0,8	36 x 53
470		424	262	0,15	0,9	1,0	36 x 53	ECG2DPK471M◇A053△△△
680		293	180	0,15	1,4	1,1	36 x 53	ECG2DPK681M◇A053△△△
1 000		199	125	0,15	2,0	1,7	36 x 83	ECG2DPK102M◇A083△△△
1 500		133	75	0,15	3,0	2,2	36 x 100	ECG2DPK152M◇A100△△△
2 200		91	50	0,15	4,4	2,8	51 x 75	ECG2DPK222M◇C075△△△
3 300		61	36	0,15	5,0	3,7	51 x 96	ECG2DPK332M◇C096△△△
4 700		43	24	0,15	5,0	4,9	64 x 96	ECG2DPK472M◇D096△△△
6 800		30	16	0,15	5,0	6,3	64 x 115	ECG2DPK682M◇D115△△△
10 000		20	12	0,15	5,0	8,1	77 x 115	ECG2DPK103M◇E115△△△
15 000		14	6,0	0,15	5,0	10,9	90 x 131	ECG2DPK153M◇F131△△△
<b>250</b> (300) 2E		330	603	160	0,15	0,8	0,8	36 x 53
	470	424	120	0,15	1,2	1,0	36 x 53	ECG2EPK471M◇A053△△△
	680	293	85	0,15	1,7	1,4	36 x 83	ECG2EPK681M◇A083△△△
	1 000	199	55	0,15	2,5	1,9	36 x 100	ECG2EPK102M◇A100△△△
	1 500	133	40	0,15	3,8	2,3	51 x 75	ECG2EPK152M◇C075△△△
	2 200	91	28	0,15	5,0	3,1	51 x 96	ECG2EPK222M◇C096△△△
	3 300	61	20	0,15	5,0	4,2	64 x 96	ECG2EPK332M◇D096△△△
	4 700	43	15	0,15	5,0	5,4	64 x 115	ECG2EPK472M◇D115△△△
	6 800	30	10	0,15	5,0	6,9	77 x 115	ECG2EPK682M◇E115△△△
	10 000	20	8,0	0,15	5,0	9,3	77 x 155	ECG2EPK103M◇E155△△△
	15 000	14	6,0	0,15	5,0	12,2	90 x 157	ECG2EPK153M◇F157△△△
	<b>400</b> (450) 2G	1 000	199	82	0,15	4,0	2,5	51 x 75
1 200		166	70	0,15	4,8	3,0	51 x 96	ECG2GPK122M◇C096△△△
1 500		133	49	0,15	5,0	3,6	51 x 115	ECG2GPK152M◇C115△△△
1 800		111	39	0,15	5,0	4,1	51 x 130	ECG2GPK182M◇C130△△△
2 200		91	30	0,15	5,0	4,5	64 x 96	ECG2GPK222M◇D096△△△
2 700		74	22	0,15	5,0	5,3	64 x 115	ECG2GPK272M◇D115△△△
3 300		61	20	0,15	5,0	6,2	64 x 130	ECG2GPK332M◇D130△△△
3 900		52	18	0,15	5,0	7,2	64 x 155	ECG2GPK392M◇D155△△△
		52	18	0,15	5,0	6,8	77 x 115	ECG2GPK392M◇E115△△△
4 700		43	13	0,15	5,0	8,7	64 x 195	ECG2GPK472M◇D195△△△
		43	13	0,15	5,0	7,8	77 x 130	ECG2GPK472M◇E130△△△
5 600		36	12	0,15	5,0	9,6	64 x 195	ECG2GPK562M◇D195△△△
	36	12	0,15	5,0	9,2	77 x 155	ECG2GPK562M◇E155△△△	
6 800	30	11	0,15	5,0	10,7	90 x 157	ECG2GPK682M◇F157△△△	
8 200	25	10	0,15	5,0	11,8	90 x 157	ECG2GPK822M◇F157△△△	
10 000	20	9,0	0,15	5,0	14,1	90 x 196	ECG2GPK103M◇F196△△△	
<b>450</b> (500) 2W	220	905	415	0,15	1,0	1,1	36 x 53	ECG2WPK221M◇A053△△△
	330	603	277	0,15	1,5	1,5	36 x 100	ECG2WPK331M◇A100△△△
	470	424	195	0,15	2,1	2,1	51 x 83	ECG2WPK471M◇C083△△△
	680	293	135	0,15	3			



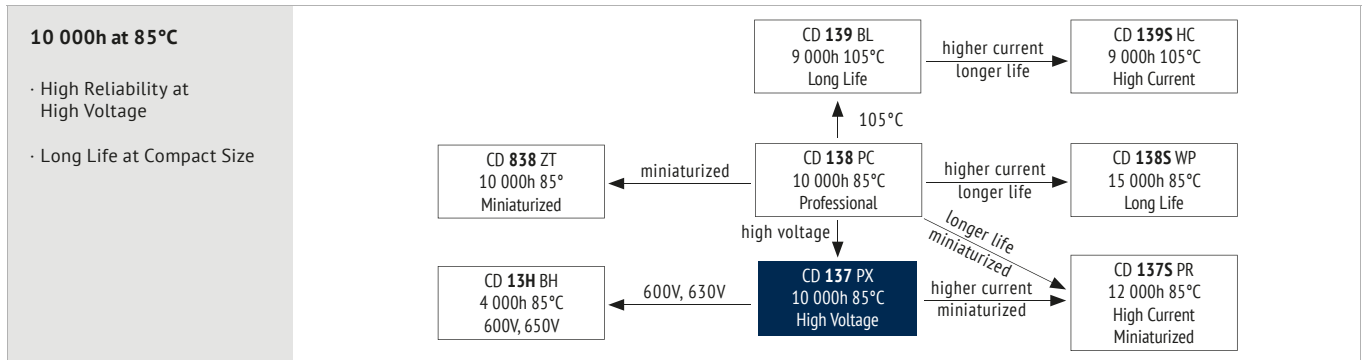

**ITEM CHARACTERISTICS**

Operating Temperature Range (°C)	-40 ~ +85
Voltage Range (V)	400 ~ 550
Capacitance Range (µF)	1 000 ~ 22 200
Capacitance Tolerance (20°C, 120Hz)	± 20%

**!** The usage at lower temperatures than indicated may be possible. Please contact the Jianghai Europe sales office for approval.

Leakage Current: After 5 minutes at 20°C application of rated voltage, leakage current is not more than specified in table.

Fast Charge-Discharge: **!** Please contact Jianghai for an appropriate choice of the capacitor or possible technical adaptations, esp. for applications like: Welding, Photoflash, Servo motors, X-Ray

**ITEM USEFUL LIFE LOAD LIFE ENDURANCE TEST SHELF LIFE**

Lifetime	10 000h	> 100 000h	5 000h	5 000h	1 000h
Leakage Current	Not more than specified value		Not more than specified value	Not more than specified value	Not more than specified value
Capacitance Change	Within ± 30% of initial value		Within ± 20% of initial value	Within ± 10% of initial value	Within ± 20% of initial value
Dissipation Factor	Not more than 300% of specified value		Not more than 200% of specified value	Not more than 200% of specified value	Not more than 200% of specified value
Condition: Applied Voltage Applied Current Applied Temperature	$U_R$ $I_R$ 85°C	$U_R$ $1,4 \times I_R$ 40°C	$U_R$ $I_R$ 85°C	$U_R$ $I_R = 0$ 85°C IEC 60384	$U_R = 0$ $I_R = 0$ 85°C After test: $U_R$ to be applied for 30 min > 24h before measurement

Terminal and Construction: The terminal version has an impact on the current capability and mechanical behavior (vibration). For high current applications the terminals C,D and E are preferred, see page 139.


Optional: Self-extinguishing Electrolyte on request

**MULTIPLIER FOR RIPPLE CURRENT (FREQUENCY COEFFICIENT)**

Frequency	50Hz	120Hz	300Hz	1kHz	≥ 10 kHz
Coefficient	0,80	1,00	1,10	1,30	1,40

Multipliers for typical operating conditions.

**MULTIPLIER FOR LIFETIME (LIFETIME DIAGRAM)**

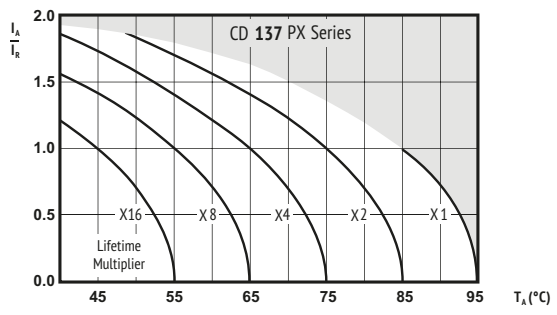

$I_A$  = actual ripple current at 120Hz,  
 $I_R$  = rated ripple current at 120Hz, 85°C  
 Multiplier of Useful Life as a function of ambient temperature & ripple current load

**ENVIRONMENTAL**

The products are RoHS, WEEE and REACH compliant. The detailed version please see separate "Environmental Certificates" document or www.jianghai-europe.com


**! SAFETY FACTOR**

This diagram includes a safety margin. In many cases the allowed current capability/lifetime may be increased. For details and approvals please contact the Jianghai Europe sales office.

SCREW



U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub>	ESR <sub>typ</sub>	tanδ	I <sub>leak</sub>	I <sub>RAC</sub>	Size	ORDER CODE
		Equivalent Series Resistance	Equivalent Series Resistance					
(V)	(µF)	20°C 120Hz (mΩ)	20°C 120Hz (mΩ)	20°C 120Hz	(mA)	85°C 120Hz (Arms)	(mm)	◇ = mounting style (stud) ▲▲▲▲ = terminal style Details: Page 138
<b>400</b> (450) 2G	2 200	98	28	0,15	5,0	8,8	51 x 115	ECG2GPX222M◇C115▲▲▲▲
	2 700	80	24	0,15	5,0	10,2	51 x 130	ECG2GPX272M◇C130▲▲▲▲
	3 300	65	21	0,15	5,0	11,0	64 x 96	ECG2GPX332M◇D096▲▲▲▲
	3 900	55	19	0,15	5,0	12,8	64 x 115	ECG2GPX392M◇D115▲▲▲▲
	4 700	46	15	0,15	5,0	14,8	64 x 130	ECG2GPX472M◇D130▲▲▲▲
	5 600	38	14	0,15	5,0	16,2	77 x 115	ECG2GPX562M◇E115▲▲▲▲
	6 800	32	13	0,15	5,0	18,7	77 x 130	ECG2GPX682M◇E130▲▲▲▲
	8 200	26	12	0,15	5,0	22,0	77 x 155	ECG2GPX822M◇E155▲▲▲▲
	10 000	22	10	0,15	5,0	26,7	77 x 195	ECG2GPX103M◇E195▲▲▲▲
		22	10	0,15	5,0	24,2	90 x 131	ECG2GPX103M◇F131▲▲▲▲
	12 000	18	8	0,15	5,0	28,5	90 x 157	ECG2GPX123M◇F157▲▲▲▲
	15 000	14	6	0,15	5,0	34,8	90 x 196	ECG2GPX153M◇F196▲▲▲▲
	18 000	12	5	0,15	5,0	41,2	90 x 236	ECG2GPX183M◇F236▲▲▲▲
22 000	10	5	0,15	5,0	47,0	101 x 237	ECG2GPX223M◇G237▲▲▲▲	
<b>450</b> (500) 2W	1 800	119	45	0,15	5,0	7,6	51 x 115	ECG2WPX182M◇C115▲▲▲▲
	2 200	98	35	0,15	5,0	8,8	51 x 130	ECG2WPX222M◇C130▲▲▲▲
	2 700	80	30	0,15	5,0	9,5	64 x 96	ECG2WPX272M◇D096▲▲▲▲
	3 300	65	24	0,15	5,0	11,2	64 x 115	ECG2WPX332M◇D115▲▲▲▲
	3 900	55	20	0,15	5,0	12,8	64 x 130	ECG2WPX392M◇D130▲▲▲▲
	4 700	46	16	0,15	5,0	14,1	77 x 115	ECG2WPX472M◇E115▲▲▲▲
	5 600	38	13	0,15	5,0	16,2	77 x 130	ECG2WPX562M◇E130▲▲▲▲
	6 800	32	11	0,15	5,0	19,1	77 x 155	ECG2WPX682M◇E155▲▲▲▲
	8 200	26	10	0,15	5,0	23,0	77 x 195	ECG2WPX822M◇E195▲▲▲▲
		26	10	0,15	5,0	21,0	90 x 131	ECG2WPX822M◇F131▲▲▲▲
	10 000	22	9	0,15	5,0	25,7	90 x 171	ECG2WPX103M◇F171▲▲▲▲
	12 000	18	8	0,15	5,0	29,7	90 x 196	ECG2WPX123M◇F196▲▲▲▲
	15 000	14	7	0,15	5,0	35,9	90 x 236	ECG2WPX153M◇F236▲▲▲▲
14		7	0,15	5,0	34,2	101 x 195	ECG2WPX153M◇G195▲▲▲▲	
18 000	12	6	0,15	5,0	40,5	101 x 237	ECG2WPX183M◇G237▲▲▲▲	
<b>500</b> (550) 2H	1 200	215	94	0,20	5,0	6,2	51 x 115	ECG2HPX122M◇C115▲▲▲▲
		215	94	0,20	5,0	6,3	64 x 96	ECG2HPX122M◇D096▲▲▲▲
	1 500	172	72	0,20	5,0	7,3	51 x 130	ECG2HPX152M◇C130▲▲▲▲
		172	72	0,20	5,0	7,1	64 x 96	ECG2HPX152M◇D096▲▲▲▲
	1 800	143	51	0,20	5,0	8,3	64 x 115	ECG2HPX182M◇D115▲▲▲▲
	2 200	117	40	0,20	5,0	9,6	64 x 130	ECG2HPX222M◇D130▲▲▲▲
	2 700	96	35	0,20	5,0	10,7	77 x 115	ECG2HPX272M◇E115▲▲▲▲
	3 300	78	30	0,20	5,0	12,4	77 x 130	ECG2HPX332M◇E130▲▲▲▲
	3 900	66	25	0,20	5,0	14,4	77 x 155	ECG2HPX392M◇E155▲▲▲▲
	4 700	55	24	0,20	5,0	16,5	77 x 171	ECG2HPX472M◇E171▲▲▲▲
		55	24	0,20	5,0	15,8	90 x 131	ECG2HPX472M◇F131▲▲▲▲
	5 600	46	22	0,20	5,0	19,0	77 x 195	ECG2HPX562M◇E195▲▲▲▲
		46	22	0,20	5,0	18,6	90 x 157	ECG2HPX562M◇F157▲▲▲▲
	6 800	38	19	0,20	5,0	21,2	90 x 171	ECG2HPX682M◇F171▲▲▲▲
	8 200	31	14	0,20	5,0	24,5	90 x 196	ECG2HPX822M◇F196▲▲▲▲
		31	14	0,20	5,0	24,2	101 x 175	ECG2HPX822M◇G175▲▲▲▲
	10 000	26	12	0,20	5,0	29,3	90 x 236	ECG2HPX103M◇F236▲▲▲▲
26		12	0,20	5,0	27,9	101 x 195	ECG2HPX103M◇G195▲▲▲▲	
12 000	22	11	0,20	5,0	33,1	101 x 237	ECG2HPX123M◇G237▲▲▲▲	
<b>550</b> (600) 2Y	1 000	258	110	0,20	5,0	5,9	51 x 130	ECG2YPX102M◇C130▲▲▲▲
	1 200	215	95	0,20	5,0	6,8	64 x 115	ECG2YPX122M◇D115▲▲▲▲
	1 500	172	74	0,20	5,0	8,0	64 x 130	ECG2YPX152M◇D130▲▲▲▲
	1 800	143	72	0,20	5,0	8,7	77 x 115	ECG2YPX182M◇E115▲▲▲▲
	2 200	117	50	0,20	5,0	10,1	77 x 130	ECG2YPX222M◇E130▲▲▲▲
	2 700	96	40	0,20	5,0	12,0	77 x 155	ECG2YPX272M◇E155▲▲▲▲
	3 300	78	36	0,20	5,0	13,3	77 x 171	ECG2YPX332M◇E171▲▲▲▲
	3 900	66	30	0,20	5,0	15,5	90 x 157	ECG2YPX392M◇F157▲▲▲▲
	4 700	55	24	0,20	5,0	17,6	90 x 171	ECG2YPX472M◇F171▲▲▲▲
	5 600	46	20	0,20	5,0	20,3	90 x 196	ECG2YPX562M◇F196▲▲▲▲
	6 800	38	16	0,20	5,0	24,1	90 x 236	ECG2YPX682M◇F236▲▲▲▲
	8 200	31	14	0,20	5,0	27,3	101 x 237	ECG2YPX822M◇G237▲▲▲▲

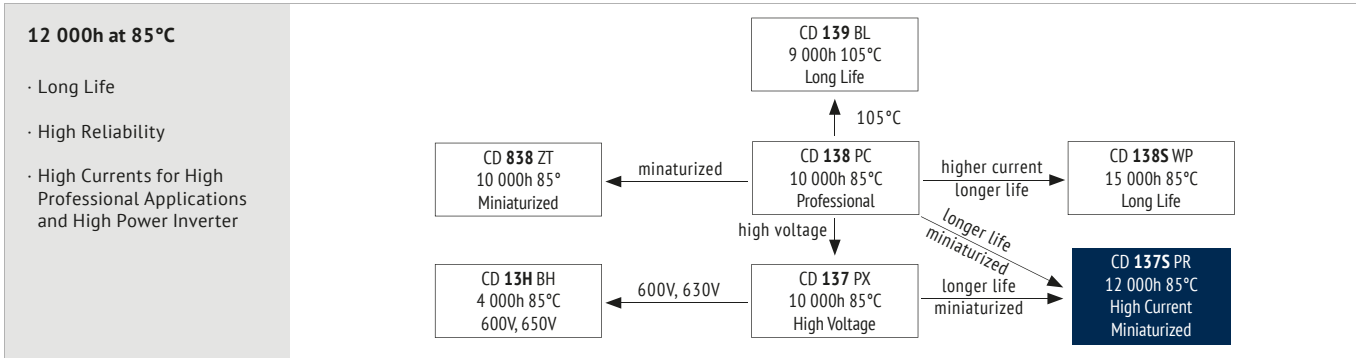

**ITEM CHARACTERISTICS**

Operating Temperature Range (°C)	-40 ~ +85
Voltage Range (V)	350 ~ 500
Capacitance Range (µF)	1 000 ~ 22 000
Capacitance Tolerance (20°C, 120Hz)	± 20%

**!** The usage at lower temperatures than indicated may be possible. Please contact the Jianghai Europe sales office for approval.

Leakage Current: After 5 minutes at 20°C application of rated voltage, leakage current is not more than specified in table.

Stability at Low Temperature (Capacitance Ratio at 120Hz):  $C_{-25°C} / C_{+20°C} \geq 0,7$

Fast Charge-Discharge: **!** Please contact Jianghai for an appropriate choice of the capacitor or possible technical adaptations, esp. for applications like: Welding, Photoflash, Servo motors, X-Ray

**ITEM USEFUL LIFE LOAD LIFE ENDURANCE TEST SHELF LIFE**

ITEM	USEFUL LIFE		LOAD LIFE	ENDURANCE TEST	SHELF LIFE	
Lifetime	12 000h	> 150 000h	5 000h	5 000h	1 000h	
Leakage Current	Not more than specified value		Not more than specified value	Not more than specified value	Not more than specified value	
Capacitance Change	Within ± 20% of initial value		Within ± 15% of initial value	Within ± 10% of initial value	Within ± 20% of initial value	
Dissipation Factor	Not more than 200% of specified value		Not more than 175% of specified value	Not more than 130% of specified value	Not more than 200% of specified value	
Condition:						
Applied Voltage	$U_R$	$U_R$	$U_R$	$U_R$	$U_R = 0$	After test: $U_R$ to be applied for 30 min > 24h before measurement
Applied Current	$I_R$	$1,4 \times I_R$	$I_R$	$I_R = 0$	$I_R = 0$	
Applied Temperature	85°C	40°C	85°C	85°C IEC 60384	85°C	


Terminal and Construction: only Terminal C, D, E available, see page 139

**MULTIPLIER FOR RIPPLE CURRENT (FREQUENCY COEFFICIENT)**

Frequency	50Hz	120Hz	300Hz	1kHz	≥ 10 kHz
<b>Coefficient</b>	0,80	1,00	1,18	1,30	1,40

Multipliers for typical operating conditions.

**MULTIPLIER FOR LIFETIME (LIFETIME DIAGRAM)**

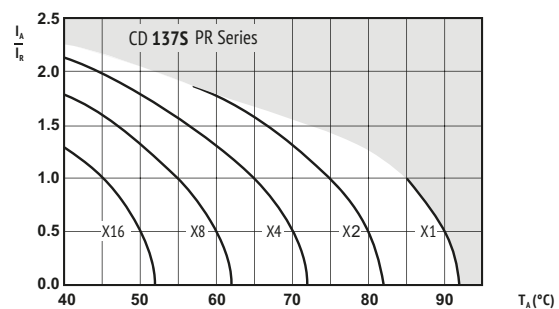

$I_A$  = actual ripple current at 120Hz,  
 $I_R$  = rated ripple current at 120Hz, 85°C  
 Multiplier of Useful Life as a function of ambient temperature & ripple current load

**ENVIRONMENTAL**

The products are RoHS, WEEE and REACH compliant. The detailed version please see separate "Environmental Certificates" document or www.jianghai-europe.com

**! SAFETY FACTOR**

This diagram includes a safety margin. In many cases the allowed current capability/lifetime may be increased. For details and approvals please contact the Jianghai Europe sales office.






U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 85°C 120Hz	Size øD x L	ORDER CODE ◇ = mounting style (stud) △△△ = terminal style
(V)	(µF)	(mΩ)	(mΩ)		(mA)	(Arms)	(mm)	Details: Page 138
<b>350</b> <b>(400)</b> <b>2V</b>	2 200	56	28	0,15	5,0	8,4	51 x 80	ECG2VPR222M◇C080△△△△
	2 700	46	23	0,15	5,0	9,9	51 x 96	ECG2VPR272M◇C096△△△△
	3 300	40	20	0,15	5,0	11,0	51 x 105	ECG2VPR332M◇C105△△△△
		40	20	0,15	5,0	11,4	64 x 80	ECG2VPR332M◇D080△△△△
	3 900	34	17	0,15	5,0	12,7	51 x 117	ECG2VPR392M◇C117△△△△
		34	17	0,15	5,0	13,2	64 x 96	ECG2VPR392M◇D096△△△△
	4 700	28	14	0,15	5,0	14,4	64 x 96	ECG2VPR472M◇D096△△△△
	5 600	24	12	0,15	5,0	16,8	64 x 115	ECG2VPR562M◇D115△△△△
		24	12	0,15	5,0	17,2	77 x 96	ECG2VPR562M◇E096△△△△
	6 800	20	10	0,15	5,0	18,8	64 x 130	ECG2VPR682M◇D130△△△△
		20	10	0,15	5,0	19,5	77 x 105	ECG2VPR682M◇E105△△△△
	8 200	18	9	0,15	5,0	22,3	77 x 117	ECG2VPR822M◇E117△△△△
	10 000	14	7	0,15	5,0	28,3	90 x 115	ECG2VPR103M◇F115△△△△
	12 000	12	6	0,15	5,0	29,8	77 x 155	ECG2VPR123M◇E155△△△△
		12	6	0,15	5,0	32,0	90 x 130	ECG2VPR123M◇F130△△△△
	15 000	10	5	0,15	5,0	36,0	90 x 145	ECG2VPR153M◇F145△△△△
	18 000	9	4,5	0,15	5,0	40,4	90 x 171	ECG2VPR183M◇F171△△△△
	22 000	7	3,5	0,15	5,0	46,9	90 x 196	ECG2VPR223M◇F196△△△△

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 85°C 120Hz	Size øD x L	ORDER CODE ◇ = mounting style (stud) △△△ = terminal style
(V)	(µF)	(mΩ)	(mΩ)		(mA)	(Arms)	(mm)	Details: Page 138
<b>500</b> <b>(550)</b> <b>2H</b>	1 000	176	88	0,15	5,0	6,1	51 x 80	ECG2HPR102M◇C080△△△△
	1 200	146	73	0,15	5,0	7,0	51 x 92	ECG2HPR122M◇C092△△△△
	1 500	120	60	0,15	5,0	8,0	51 x 105	ECG2HPR152M◇C105△△△△
		120	60	0,15	5,0	8,1	64 x 80	ECG2HPR152M◇D080△△△△
	1 800	102	51	0,15	5,0	9,2	51 x 117	ECG2HPR182M◇C117△△△△
		86	43	0,15	5,0	10,6	64 x 100	ECG2HPR222M◇D100△△△△
	2 200	86	43	0,15	5,0	11,0	77 x 85	ECG2HPR222M◇E085△△△△
		72	36	0,15	5,0	12,2	64 x 115	ECG2HPR272M◇D115△△△△
	3 300	60	30	0,15	5,0	14,1	77 x 105	ECG2HPR332M◇E105△△△△
	3 900	52	26	0,15	5,0	16,5	77 x 130	ECG2HPR392M◇E130△△△△
		42	21	0,15	5,0	18,8	77 x 143	ECG2HPR472M◇E143△△△△
	4 700	42	21	0,15	5,0	19,2	90 x 115	ECG2HPR472M◇F115△△△△
		38	19	0,15	5,0	21,4	90 x 130	ECG2HPR562M◇F130△△△△
	6 800	32	16	0,15	5,0	24,6	90 x 145	ECG2HPR682M◇F145△△△△
	8 200	26	13	0,15	5,0	18,5	90 x 170	ECG2HPR822M◇F170△△△△
	10 000	22	11	0,15	5,0	32,9	90 x 196	ECG2HPR103M◇F196△△△△
	12 000	20	10	0,15	5,0	34,7	90 x 220	ECG2HPR123M◇F220△△△△

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 85°C 120Hz	Size øD x L	ORDER CODE ◇ = mounting style (stud) △△△ = terminal style
(V)	(µF)	(mΩ)	(mΩ)		(mA)	(Arms)	(mm)	Details: Page 138
<b>400</b> <b>(450)</b> <b>2G</b>	1 800	68	34	0,15	5,0	7,6	51 x 80	ECG2GPR182M◇C080△△△△
	2 200	45	28	0,15	5,0	9,1	51 x 96	ECG2GPR222M◇C096△△△△
	2 700	46	23	0,15	5,0	10,4	51 x 105	ECG2GPR272M◇C105△△△△
		46	23	0,15	5,0	10,5	64 x 80	ECG2GPR272M◇D080△△△△
	3 300	38	19	0,15	5,0	12,5	51 x 130	ECG2GPR332M◇C130△△△△
		38	19	0,15	5,0	12,4	64 x 96	ECG2GPR332M◇D096△△△△
	3 900	32	16	0,15	5,0	13,3	64 x 96	ECG2GPR392M◇D096△△△△
	4 700	28	14	0,15	5,0	15,2	64 x 115	ECG2GPR472M◇D115△△△△
		28	14	0,15	5,0	16,3	77 x 96	ECG2GPR472M◇E096△△△△
	5 600	24	12	0,15	5,0	17,1	64 x 130	ECG2GPR562M◇D130△△△△
		24	12	0,15	5,0	18,2	77 x 105	ECG2GPR562M◇E105△△△△
	6 800	20	10	0,15	5,0	20,5	77 x 117	ECG2GPR682M◇E117△△△△
	8 200	18	9	0,15	5,0	23,3	77 x 130	ECG2GPR822M◇E130△△△△
	10 000	14	7	0,15	5,0	27,0	77 x 155	ECG2GPR103M◇E155△△△△
		14	7	0,15	5,0	29,1	90 x 130	ECG2GPR103M◇F130△△△△
	12 000	12	6	0,15	5,0	31,5	77 x 190	ECG2GPR123M◇E190△△△△
		12	6	0,15	5,0	32,5	90 x 145	ECG2GPR123M◇F145△△△△
	15 000	10	5	0,15	5,0	37,2	77 x 220	ECG2GPR153M◇E220△△△△
		10	5	0,15	5,0	38,3	90 x 170	ECG2GPR153M◇F170△△△△
	18 000	9	4,5	0,15	5,0	42,4	90 x 196	ECG2GPR183M◇F196△△△△

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 85°C 120Hz	Size øD x L	ORDER CODE ◇ = mounting style (stud) △△△ = terminal style
(V)	(µF)	(mΩ)	(mΩ)		(mA)	(Arms)	(mm)	Details: Page 138
<b>450</b> <b>(500)</b> <b>2W</b>	1 500	112	56	0,15	5,0	7,1	51 x 80	ECG2WPR152M◇C080△△△△
	1 800	94	57	0,15	5,0	8,0	51 x 96	ECG2WPR182M◇C096△△△△
	2 200	78	39	0,15	5,0	9,2	51 x 105	ECG2WPR222M◇C105△△△△
		78	39	0,15	5,0	9,7	64 x 80	ECG2WPR222M◇D080△△△△
	2 700	66	33	0,15	5,0	10,5	51 x 117	ECG2WPR272M◇C117△△△△
		66	33	0,15	5,0	10,9	64 x 96	ECG2WPR272M◇D096△△△△
	3 300	56	28	0,15	5,0	12,1	64 x 100	ECG2WPR332M◇D100△△△△
		48	24	0,15	5,0	13,9	64 x 115	ECG2WPR392M◇D115△△△△
	3 900	48	24	0,15	5,0	15,2	77 x 96	ECG2WPR392M◇E096△△△△
		40	20	0,15	5,0	15,5	64 x 130	ECG2WPR472M◇D130△△△△
	4 700	40	20	0,15	5,0	16,9	77 x 105	ECG2WPR472M◇E105△△△△
		34	17	0,15	5,0	18,2	64 x 155	ECG2WPR562M◇D155△△△△
	5 600	34	17	0,15	5,0	19,4	77 x 117	ECG2WPR562M◇E117△△△△
		28	14	0,15	5,0	21,5	77 x 130	ECG2WPR682M◇E130△△△△
	6 800	28	14	0,15	5,0	24,3	90 x 115	ECG2WPR682M◇F115△△△△
		24	12	0,15	5,0	24,5	77 x 155	ECG2WPR822M◇E155△△△△
	8 200	24	12	0,15	5,0	27,5	90 x 130	ECG2WPR822M◇F130△△△△
		20	10	0,15	5,0	29,2	77 x 190	ECG2WPR103M◇E190△△△△
	10 000	20	10	0,15	5,0	30,3	90 x 145	ECG2WPR103M◇F145△△△△
		17	8,5	0,15	5,0	33,4	77 x 220	ECG2WPR123M◇E220△△△△
12 000	17	8,5	0,15	5,0	34,6	90 x 170	ECG2WPR123M◇F170△△△△	
	14	6,8	0,15	5,0	39,8	90 x 196	ECG2WPR153M◇F196△△△△	

**SCREW**

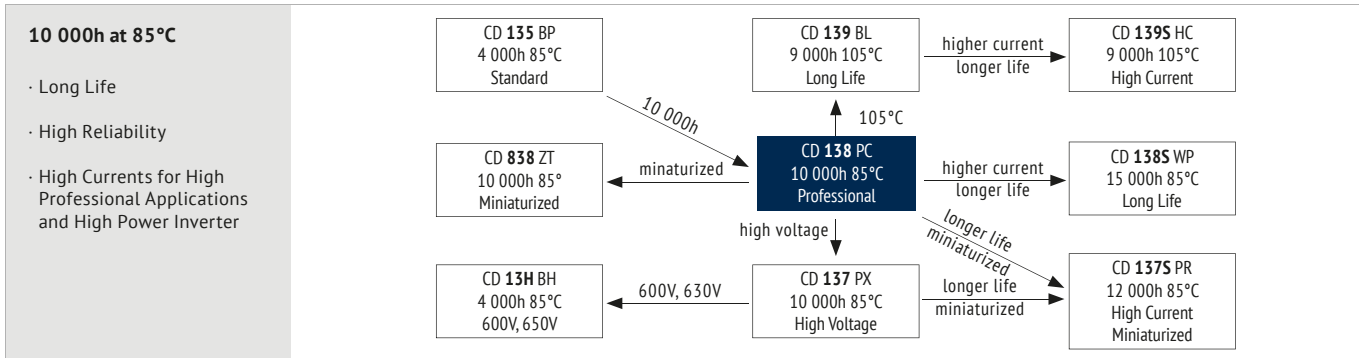

**ITEM CHARACTERISTICS**

Operating Temperature Range (°C)	-40 ~ +85
Voltage Range (V)	350 ~ 450
Capacitance Range (µF)	1 000 ~ 18 000
Capacitance Tolerance (20°C, 120Hz)	± 20%

**!** The usage at lower temperatures than indicated may be possible. Please contact the Jianghai Europe sales office for approval.

Leakage Current: After 5 minutes at 20°C application of rated voltage, leakage current is not more than specified in table.

Stability at Low Temperature (Capacitance Ratio at 120Hz):  $C_{-25°C} / C_{+20°C} \geq 0,7$

Fast Charge-Discharge: **!** Please contact Jianghai for an appropriate choice of the capacitor or possible technical adaptations, esp. for applications like: Welding, Photoflash, Servo motors, X-Ray

ITEM	USEFUL LIFE		LOAD LIFE	ENDURANCE TEST	SHELF LIFE	
	10 000h	> 100 000h	5 000h	5 000h	1 000h	
Leakage Current	Not more than specified value		Not more than specified value	Not more than specified value	Not more than specified value	
Capacitance Change	Within ± 30% of initial value		Within ± 20% of initial value	Within ± 10% of initial value	Within ± 20% of initial value	
Dissipation Factor	Not more than 300% of specified value		Not more than 200% of specified value	Not more than 130% of specified value	Not more than 200% of specified value	
Condition: Applied Voltage Applied Current Applied Temperature	$U_R$ $I_R$ 85°C	$U_R$ $1,4 \times I_R$ 40°C	$U_R$ $I_R$ 85°C	$U_R$ $I_R = 0$ 85°C IEC 60384	$U_R = 0$ $I_R = 0$ 85°C	After test: $U_R$ to be applied for 30 min > 24h before measurement

Terminal and Construction: The terminal version has an impact on the current capability and mechanical behavior (vibration). For high current applications the terminals C,D and E are preferred, see page 139.


Optional: Self-extinguishing Electrolyte on request

**MULTIPLIER FOR RIPPLE CURRENT (FREQUENCY COEFFICIENT)**

Frequency	50Hz	120Hz	300Hz	1kHz	≥ 10 kHz
Coefficient	0,80	1,00	1,10	1,30	1,40

Multipliers for typical operating conditions.

**MULTIPLIER FOR LIFETIME (LIFETIME DIAGRAM)**

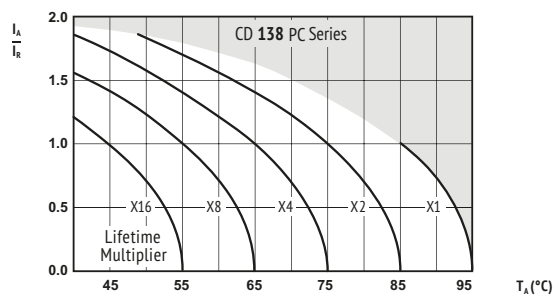

$I_A$  = actual ripple current at 120Hz,  $I_R$  = rated ripple current at 120Hz, 85°C  
Multiplier of Useful Life as a function of ambient temperature & ripple current load

**ENVIRONMENTAL**

The products are RoHS, WEEE and REACH compliant. The detailed version please see separate "Environmental Certificates" document or www.jianghai-europe.com

**! SAFETY FACTOR**


This diagram includes a safety margin. In many cases the allowed current capability/lifetime may be increased. For details and approvals please contact the Jianghai Europe sales office.

SCREW



$U_{RDC}$ (Surge Voltage) Code	$C_R$ Rated Capacitance	$ESR_{max}$ Equivalent Series Resistance	$ESR_{typ}$ Equivalent Series Resistance	$\tan\delta$ Dissipation Factor	$I_{Leak}$ Leakage Current	$I_{RAC}$ Rated Ripple Current	Size $\varnothing D \times L$	ORDER CODE  ◇ = mounting style (stud) △△△△ = terminal style
(V)	( $\mu F$ )	20°C 120Hz (m $\Omega$ )	20°C 120Hz (m $\Omega$ )	20°C 20°C 120Hz	(mA)	85°C 120Hz (Arms)	(mm)	Details: Page 138
<b>350</b> (400) 2V	1 200	215	67	0,15	4,2	5,5	51 x 83	ECG2VPC122M◇C083△△△△
	1 500	172	55	0,15	5,0	6,1	51 x 83	ECG2VPC152M◇C083△△△△
	1 800	143	43	0,15	5,0	7,4	51 x 96	ECG2VPC182M◇C096△△△△
	2 200	117	30	0,15	5,0	8,2	51 x 96	ECG2VPC222M◇C096△△△△
	3 300	78	23	0,15	5,0	11,3	51 x 130	ECG2VPC332M◇C130△△△△
	3 900	66	19	0,15	5,0	12,8	64 x 115	ECG2VPC392M◇D115△△△△
	4 700	55	16	0,15	5,0	14,8	64 x 130	ECG2VPC472M◇D130△△△△
	5 600	46	14	0,15	5,0	16,3	77 x 115	ECG2VPC562M◇E115△△△△
	6 800	38	13	0,15	5,0	18,8	77 x 130	ECG2VPC682M◇E130△△△△
	8 200	31	11	0,15	5,0	22,1	77 x 155	ECG2VPC822M◇E155△△△△
	10 000	26	10	0,15	5,0	25,9	90 x 157	ECG2VPC103M◇F157△△△△
	12 000	22	8	0,15	5,0	28,4	90 x 157	ECG2VPC123M◇F157△△△△
	15 000	17	6	0,15	5,0	34,6	90 x 196	ECG2VPC153M◇F196△△△△
	18 000	14	4	0,15	5,0	41,4	90 x 236	ECG2VPC183M◇F236△△△△
<b>400</b> (450) 2G	1 000	215	82	0,15	4,0	5,0	51 x 83	ECG2GPC102M◇C083△△△△
	1 200	179	70	0,15	4,8	5,5	51 x 83	ECG2GPC122M◇C083△△△△
	1 500	143	50	0,15	5,0	6,7	51 x 96	ECG2GPC152M◇C096△△△△
	1 800	119	40	0,15	5,0	7,4	51 x 96	ECG2GPC182M◇C096△△△△
	2 200	98	28	0,15	5,0	9,2	51 x 130	ECG2GPC222M◇C130△△△△
	2 700	80	23	0,15	5,0	9,9	64 x 96	ECG2GPC272M◇D096△△△△
	3 300	65	21	0,15	5,0	11,8	64 x 115	ECG2GPC332M◇D115△△△△
	3 900	55	19	0,15	5,0	13,5	64 x 130	ECG2GPC392M◇D130△△△△
	4 700	46	15	0,15	5,0	14,9	77 x 115	ECG2GPC472M◇E115△△△△
	5 600	39	14	0,15	5,0	17,0	77 x 130	ECG2GPC562M◇E130△△△△
	6 800	32	13	0,15	5,0	20,2	77 x 155	ECG2GPC682M◇E155△△△△
	8 200	26	12	0,15	5,0	23,5	90 x 157	ECG2GPC822M◇F157△△△△
	10 000	22	10	0,15	5,0	25,9	90 x 157	ECG2GPC103M◇F157△△△△
	12 000	18	8	0,15	5,0	31,0	90 x 196	ECG2GPC123M◇F196△△△△
15 000	14	6	0,15	5,0	37,5	90 x 236	ECG2GPC153M◇F236△△△△	
<b>450</b> (500) 2W	1 000	215	93	0,15	4,5	5,0	51 x 83	ECG2WPC102M◇C083△△△△
	1 200	179	69	0,15	5,0	6,0	51 x 96	ECG2WPC122M◇C096△△△△
	1 500	143	56	0,15	5,0	7,2	51 x 115	ECG2WPC152M◇C115△△△△
	1 800	119	45	0,15	5,0	8,3	51 x 130	ECG2WPC182M◇C130△△△△
	2 200	98	35	0,15	5,0	9,0	64 x 93	ECG2WPC222M◇D093△△△△
	2 700	80	30	0,15	5,0	10,7	64 x 115	ECG2WPC272M◇D115△△△△
	3 300	65	24	0,15	5,0	12,4	64 x 130	ECG2WPC332M◇D130△△△△
	3 900	55	20	0,15	5,0	13,6	77 x 115	ECG2WPC392M◇E115△△△△
	4 700	46	16	0,15	5,0	15,6	77 x 130	ECG2WPC472M◇E130△△△△
	5 600	38	13	0,15	5,0	18,3	77 x 155	ECG2WPC562M◇E155△△△△
	6 800	32	11	0,15	5,0	21,4	90 x 157	ECG2WPC682M◇F157△△△△
	8 200	26	10	0,15	5,0	23,5	90 x 157	ECG2WPC822M◇F157△△△△
	10 000	22	9	0,15	5,0	28,3	90 x 196	ECG2WPC103M◇F196△△△△
	12 000	18	8	0,15	5,0	33,6	90 x 236	ECG2WPC123M◇F236△△△△

**SCREW**

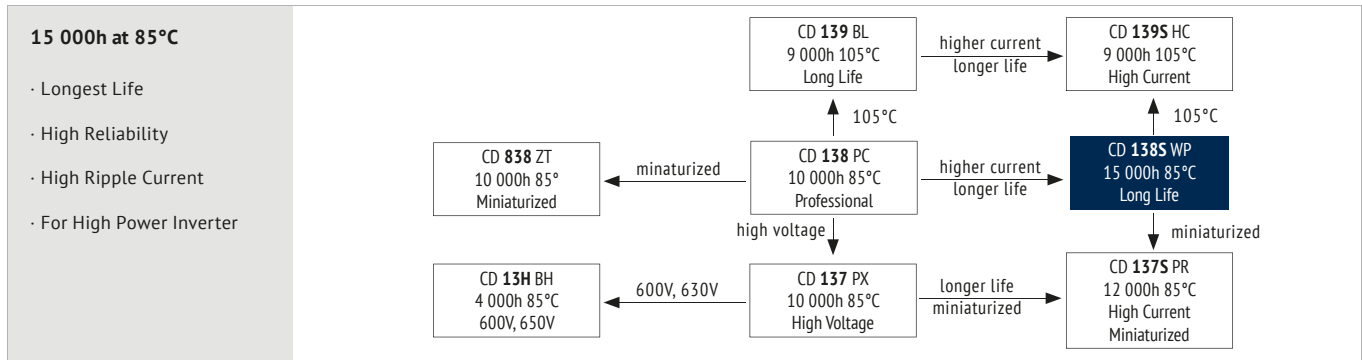

**ITEM CHARACTERISTICS**

Operating Temperature Range (°C)	-40 ~ +85
Voltage Range (V)	350 ~ 500
Capacitance Range (µF)	1 500 ~ 12 000
Capacitance Tolerance (20°C, 120Hz)	± 20%

**!** The usage at lower temperatures than indicated may be possible. Please contact the Jianghai Europe sales office for approval.

Leakage Current: After 5 minutes at 20°C application of rated voltage, leakage current is not more than specified in table.

Stability at Low Temperature (Capacitance Ratio at 120Hz):  $C_{-25°C} / C_{+20°C} \geq 0,7$

Fast Charge-Discharge: **!** Please contact Jianghai for an appropriate choice of the capacitor or possible technical adaptations, esp. for applications like: Welding, Photoflash, Servo motors, X-Ray

ITEM	USEFUL LIFE		LOAD LIFE	ENDURANCE TEST	SHELF LIFE	
	Lifetime	15 000h	> 150 000h	10 000h	12 000h	1 000h
Leakage Current	Not more than specified value		Not more than specified value	Not more than specified value	Not more than specified value	
Capacitance Change	Within ± 30% of initial value		Within ± 20% of initial value	Within ± 10% of initial value	Within ± 20% of initial value	
Dissipation Factor	Not more than 300% of specified value		Not more than 200% of specified value	Not more than 130% of specified value	Not more than 200% of specified value	
Condition:						
Applied Voltage	$U_R$	$U_R$	$U_R$	$U_R$	$U_R = 0$	After test: $U_R$ to be applied for 30 min > 24h before measurement
Applied Current	$I_R$	$1,4 \times I_R$	$I_R$	$I_R = 0$	$I_R = 0$	
Applied Temperature	85°C	40°C	85°C	85°C IEC 60384	85°C	

Terminal and Construction: The terminal version has an impact on the current capability and mechanical behavior (vibration). For high current applications the terminals C,D and E are preferred, see page 139.


Optional: Self-extinguishing Electrolyte on request

**MULTIPLIER FOR RIPPLE CURRENT (FREQUENCY COEFFICIENT)**

Frequency	50Hz	120Hz	300Hz	1kHz	≥ 10 kHz
Coefficient	0,80	1,00	1,10	1,30	1,40

Multipliers for typical operating conditions.

**MULTIPLIER FOR LIFETIME (LIFETIME DIAGRAM)**

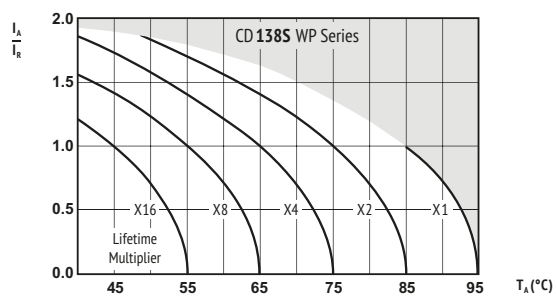

$I_a$  = actual ripple current at 120Hz,  
 $I_R$  = rated ripple current at 120Hz, 85°C  
 Multiplier of Useful Life as a function of ambient temperature & ripple current load

**ENVIRONMENTAL**

The products are RoHS, WEEE and REACH compliant. The detailed version please see separate "Environmental Certificates" document or www.jianghai-europe.com

**! SAFETY FACTOR**

This diagram includes a safety margin. In many cases the allowed current capability/lifetime may be increased. For details and approvals please contact the Jianghai Europe sales office.

SCREW




U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance	ESR <sub>typ</sub> Equivalent Series Resistance	tanδ Dissipation Factor	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current	Size øD x L	ORDER CODE
								20°C 120Hz (mΩ)
<b>350</b> <b>(400)</b> <b>2V</b>	3 900	50	25	0,15	5,0	14,6	64 x 96	ECC2VWP392M♦D096▲▲▲▲
	4 700	40	20	0,15	5,0	16,9	64 x 115	ECC2VWP472M♦D115▲▲▲▲
	5 600	34	17	0,15	5,0	19,8	64 x 130	ECC2VWP562M♦D130▲▲▲▲
		34	17	0,15	5,0	21,6	77 x 115	ECC2VWP562M♦E115▲▲▲▲
	6 800	28	14	0,15	5,0	25,0	77 x 143	ECC2VWP682M♦E143▲▲▲▲
		28	14	0,15	5,0	26,2	90 x 105	ECC2VWP682M♦F105▲▲▲▲
	8 200	24	12	0,15	5,0	29,3	77 x 143	ECC2VWP822M♦E143▲▲▲▲
		24	12	0,15	5,0	30,1	77 x 155	ECC2VWP822M♦E155▲▲▲▲
	10 000	18	9	0,15	5,0	35,7	90 x 157	ECC2VWP103M♦F157▲▲▲▲
	12 000	16	8	0,15	5,0	39,1	90 x 157	ECC2VWP123M♦F157▲▲▲▲
<b>400</b> <b>(450)</b> <b>2G</b>	2 700	76	38	0,15	5,0	11,5	64 x 96	ECC2GWP272M♦D096▲▲▲▲
	3 300	60	30	0,15	5,0	14,2	64 x 115	ECC2GWP332M♦D115▲▲▲▲
	3 900	52	26	0,15	5,0	16,5	64 x 115	ECC2GWP392M♦D115▲▲▲▲
		52	26	0,15	5,0	17,2	77 x 105	ECC2GWP392M♦E105▲▲▲▲
	4 700	42	21	0,15	5,0	18,1	64 x 130	ECC2GWP472M♦D130▲▲▲▲
		42	21	0,15	5,0	20,8	77 x 115	ECC2GWP472M♦E115▲▲▲▲
	5 600	36	18	0,15	5,0	22,7	77 x 130	ECC2GWP562M♦E130▲▲▲▲
		36	18	0,15	5,0	23,8	90 x 105	ECC2GWP562M♦F105▲▲▲▲
	6 800	30	15	0,15	5,0	26,6	77 x 155	ECC2GWP682M♦E155▲▲▲▲
		30	15	0,15	5,0	27,4	90 x 130	ECC2GWP682M♦F130▲▲▲▲
8 200	24	12	0,15	5,0	32,2	90 x 157	ECC2GWP822M♦F157▲▲▲▲	
10 000	20	10	0,15	5,0	35,7	90 x 157	ECC2GWP103M♦F157▲▲▲▲	
<b>450</b> <b>(500)</b> <b>2W</b>	2 200	92	46	0,15	5,0	10,4	64 x 96	ECC2WWP222M♦D096▲▲▲▲
		92	46	0,15	5,0	11,5	77 x 80	ECC2WWP222M♦E080▲▲▲▲
	2 700	76	38	0,15	5,0	12,8	64 x 115	ECC2WWP272M♦D115▲▲▲▲
		60	30	0,15	5,0	15,2	64 x 130	ECC2WWP332M♦D130▲▲▲▲
	3 300	60	30	0,15	5,0	15,8	77 x 105	ECC2WWP332M♦E105▲▲▲▲
		54	27	0,15	5,0	16,5	64 x 130	ECC2WWP392M♦D130▲▲▲▲
	3 900	54	27	0,15	5,0	18,0	77 x 115	ECC2WWP392M♦E115▲▲▲▲
		42	21	0,15	5,0	20,8	77 x 143	ECC2WWP472M♦E143▲▲▲▲
	4 700	42	21	0,15	5,0	21,8	90 x 105	ECC2WWP472M♦F105▲▲▲▲
		36	18	0,15	5,0	24,2	77 x 143	ECC2WWP562M♦E143▲▲▲▲
5 600	36	18	0,15	5,0	24,9	90 x 130	ECC2WWP562M♦F130▲▲▲▲	
	30	15	0,15	5,0	29,4	90 x 157	ECC2WWP682M♦F157▲▲▲▲	
8 200	24	12	0,15	5,0	32,2	90 x 157	ECC2WWP822M♦F157▲▲▲▲	
10 000	20	10	0,15	5,0	36,9	90 x 171	ECC2WWP103M♦F171▲▲▲▲	
<b>500</b> <b>(550)</b> <b>2H</b>	1 500	148	74	0,15	5,0	8,6	64 x 96	ECC2HWP152M♦D096▲▲▲▲
	1 800	132	62	0,15	5,0	10,0	64 x 115	ECC2HWP182M♦D115▲▲▲▲
	2 200	102	51	0,15	5,0	11,7	64 x 130	ECC2HWP222M♦D130▲▲▲▲
	2 700	82	41	0,15	5,0	15,0	77 x 115	ECC2HWP272M♦E115▲▲▲▲
		68	34	0,15	5,0	17,5	77 x 130	ECC2HWP332M♦E130▲▲▲▲
	3 300	68	34	0,15	5,0	17,5	77 x 130	ECC2HWP332M♦E130▲▲▲▲
	3 900	58	29	0,15	5,0	20,2	77 x 143	ECC2HWP392M♦E143▲▲▲▲
	4 700	48	24	0,15	5,0	21,8	90 x 130	ECC2HWP472M♦F130▲▲▲▲
5 600	40	20	0,15	5,0	25,3	90 x 157	ECC2HWP562M♦F157▲▲▲▲	
6 800	32	16	0,15	5,0	29,0	90 x 171	ECC2HWP682M♦F171▲▲▲▲	

**SCREW**



**9 000h at 105°C**

- Longer Life at 105°C
- Highest Professional Power Application

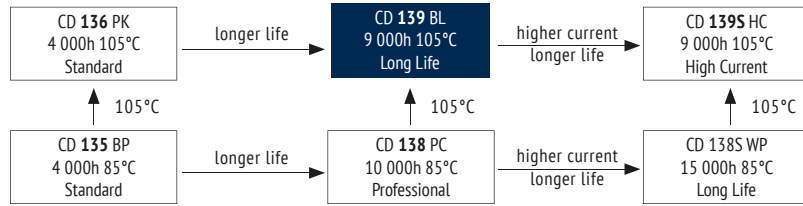

**ITEM CHARACTERISTICS**

Operating Temperature Range (°C)	-40 ~ +105
Voltage Range (V)	350 ~ 450
Capacitance Range (µF)	1 000 ~ 15 000
Capacitance Tolerance (20°C, 120Hz)	± 20%

**!** The usage at lower temperatures than indicated may be possible. Please contact the Jianghai Europe sales office for approval.

Leakage Current: After 5 minutes at 20°C application of rated voltage, leakage current is not more than specified in table.

Stability at Low Temperature (Capacitance Ratio at 120Hz):  $C_{-25°C} / C_{+20°C} \geq 0,7$

Fast Charge-Discharge: **!** Please contact Jianghai for an appropriate choice of the capacitor or possible technical adaptations, esp. for applications like: Welding, Photoflash, Servo motors, X-Ray

ITEM	USEFUL LIFE		LOAD LIFE	ENDURANCE TEST	SHELF LIFE	
Lifetime	9 000h	> 200 000h	5 000h	5 000h	1 000h	
Leakage Current	Not more than specified value		Not more than specified value	Not more than specified value	Not more than specified value	
Capacitance Change	Within ± 30% of initial value		Within ± 20% of initial value	Within ± 10% of initial value	Within ± 20% of initial value	
Dissipation Factor	Not more than 300% of specified value		Not more than 200% of specified value	Not more than 130% of specified value	Not more than 200% of specified value	
Condition:						
Applied Voltage	$U_R$	$U_R$	$U_R$	$U_R$	$U_R = 0$	After test: $U_R$ to be applied for 30 min > 24h before measurement
Applied Current	$I_R$	$1,4 \times I_R$	$I_R$	$I_R = 0$	$I_R = 0$	
Applied Temperature	105°C	50°C	105°C	105°C IEC 60384	105°C	


Terminal and Construction: The terminal version has an impact on the current capability and mechanical behavior (vibration). For high current applications the terminals C,D and E are preferred, see page 139.

**MULTIPLIER FOR RIPPLE CURRENT (FREQUENCY COEFFICIENT)**

Frequency	50Hz	120Hz	300Hz	1kHz	≥ 10 kHz
<b>Coefficient</b>	0,80	1,00	1,10	1,30	1,40

Multipliers for typical operating conditions.

**MULTIPLIER FOR LIFETIME (LIFETIME DIAGRAM)**

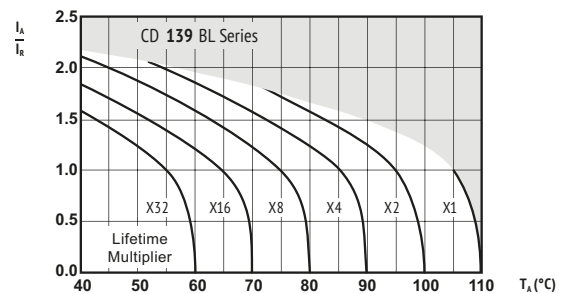

$I_a$  = actual ripple current at 120Hz,  
 $I_r$  = rated ripple current at 120Hz, 105°C  
 Multiplier of Useful Life as a function of ambient temperature & ripple current load

**ENVIRONMENTAL**

The products are RoHS, WEEE and REACH compliant. The detailed version please see separate "Environmental Certificates" document or [www.jianghai-europe.com](http://www.jianghai-europe.com)

**! SAFETY FACTOR**

This diagram includes a safety margin. In many cases the allowed current capability/lifetime may be increased. For details and approvals please contact the Jianghai Europe sales office.






U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub>	ESR <sub>typ</sub>	tanδ	I <sub>leak</sub>	I <sub>RAC</sub>	Size øD x L	ORDER CODE
		Equivalent Series Resistance 20°C 120Hz	Equivalent Series Resistance 20°C 120Hz	Dissipation Factor 20°C 120Hz	Leakage Current	Rated Ripple Current 105°C 120Hz		
(V)	(µF)	(mΩ)	(mΩ)		(mA)	(Arms)	(mm)	Details: Page 138
<b>350</b> <b>(400)</b> <b>2V</b>	1 000	259	69	0,15	3,5	3,9	51 x 75	ECG2VBL102M0C075△△△△
	1 200	215	65	0,15	4,2	4,2	51 x 75	ECG2VBL122M0C075△△△△
	1 500	172	55	0,15	5,0	5,2	51 x 96	ECG2VBL152M0C096△△△△
	1 800	143	43	0,15	5,0	5,7	51 x 96	ECG2VBL182M0C096△△△△
	2 200	117	30	0,15	5,0	7,1	51 x 130	ECG2VBL222M0C130△△△△
	2 700	96	27	0,15	5,0	7,7	64 x 96	ECG2VBL272M0D096△△△△
	3 300	78	23	0,15	5,0	9,1	64 x 115	ECG2VBL332M0D115△△△△
	3 900	66	19	0,15	5,0	10,4	64 x 130	ECG2VBL392M0D130△△△△
	4 700	55	15	0,15	5,0	12,2	64 x 155	ECG2VBL472M0D155△△△△
		55	16	0,15	5,0	11,5	77 x 115	ECG2VBL472M0E115△△△△
	5 600	46	13	0,15	5,0	14,6	64 x 195	ECG2VBL562M0D195△△△△
		46	14	0,15	5,0	13,1	77 x 130	ECG2VBL562M0E130△△△△
	6 800	38	13	0,15	5,0	15,5	77 x 155	ECG2VBL682M0E155△△△△
	8 200	31	11	0,15	5,0	18,1	90 x 157	ECG2VBL822M0F157△△△△
	10 000	26	10	0,15	5,0	19,9	90 x 157	ECG2VBL103M0F157△△△△
12 000	22	8	0,15	5,0	23,8	90 x 196	ECG2VBL123M0F196△△△△	
15 000	17	6	0,15	5,0	28,8	90 x 236	ECG2VBL153M0F236△△△△	
<b>400</b> <b>(450)</b> <b>2G</b>	1 000	215	70	0,15	4,0	3,9	51 x 75	ECG2GBL102M0C075△△△△
	1 200	179	64	0,15	4,8	4,6	51 x 96	ECG2GBL122M0C096△△△△
	1 500	143	54	0,15	5,0	5,6	51 x 115	ECG2GBL152M0C115△△△△
		143	54	0,15	5,0	5,6	51 x 115	ECG2GBL152M0C115△△△△
	1 800	119	43	0,15	5,0	6,4	51 x 130	ECG2GBL182M0C130△△△△
	2 200	98	41	0,15	5,0	6,9	64 x 96	ECG2GBL222M0D096△△△△
	2 700	80	38	0,15	5,0	8,2	64 x 115	ECG2GBL272M0D115△△△△
	3 300	65	29	0,15	5,0	9,5	64 x 130	ECG2GBL332M0D130△△△△
	3 900	55	26	0,15	5,0	11,1	64 x 155	ECG2GBL392M0D155△△△△
		55	28	0,15	5,0	10,4	77 x 115	ECG2GBL392M0E115△△△△
	4 700	46	22	0,15	5,0	13,4	64 x 195	ECG2GBL472M0D195△△△△
		46	22	0,15	5,0	12,0	77 x 130	ECG2GBL472M0E130△△△△
	5 600	39	19	0,15	5,0	14,6	64 x 195	ECG2GBL562M0D195△△△△
		39	19	0,15	5,0	14,0	77 x 155	ECG2GBL562M0E155△△△△
	6 800	32	17	0,15	5,0	16,5	90 x 157	ECG2GBL682M0F157△△△△
8 200	26	15	0,15	5,0	18,1	90 x 157	ECG2GBL822M0F157△△△△	
10 000	22	12	0,15	5,0	21,7	90 x 196	ECG2GBL103M0F196△△△△	
12 000	18	8	0,15	5,0	25,8	90 x 236	ECG2GBL123M0F236△△△△	
<b>450</b> <b>(500)</b> <b>2W</b>	1 000	215	70	0,15	4,5	4,2	51 x 96	ECG2WBL102M0C096△△△△
	1 200	179	66	0,15	5,0	5,0	51 x 115	ECG2WBL122M0C115△△△△
	1 500	143	54	0,15	5,0	5,9	51 x 130	ECG2WBL152M0C130△△△△
	1 800	119	44	0,15	5,0	6,3	64 x 96	ECG2WBL182M0D096△△△△
	2 200	98	42	0,15	5,0	7,4	64 x 115	ECG2WBL222M0D115△△△△
		80	40	0,15	5,0	8,6	64 x 130	ECG2WBL272M0D130△△△△
	2 700	80	42	0,15	5,0	8,7	77 x 115	ECG2WBL272M0E115△△△△
		65	31	0,15	5,0	10,2	64 x 155	ECG2WBL332M0D155△△△△
	3 300	65	35	0,15	5,0	10,1	77 x 130	ECG2WBL332M0E130△△△△
	3 900	55	28	0,15	5,0	12,3	64 x 195	ECG2WBL392M0D195△△△△
	4 700	46	25	0,15	5,0	12,9	77 x 155	ECG2WBL472M0E155△△△△
	5 600	38	22	0,15	5,0	15,4	77 x 195	ECG2WBL562M0E195△△△△
		38	24	0,15	5,0	14,9	90 x 157	ECG2WBL562M0F157△△△△
	6 800	32	21	0,15	5,0	18,0	90 x 196	ECG2WBL682M0F196△△△△
	8 200	27	18	0,15	5,0	19,8	90 x 196	ECG2WBL822M0F196△△△△
10 000	22	16	0,15	5,0	23,6	90 x 236	ECG2WBL103M0F236△△△△	

**SCREW**

**9 000h at 105°C**

- Longer Life at 105°C for Professional Industry Application
- Improved Current Capability

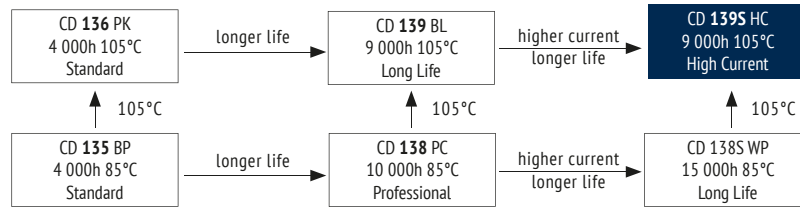

**ITEM CHARACTERISTICS**

Operating Temperature Range (°C)	-40 ~ +105
Voltage Range (V)	350 ~ 450
Capacitance Range (µF)	1 000 ~ 15 000
Capacitance Tolerance (20°C, 120Hz)	± 20%

**!** The usage at lower temperatures than indicated may be possible. Please contact the Jianghai Europe sales office for approval.

Leakage Current: After 5 minutes at 20°C application of rated voltage, leakage current is not more than specified in table.

Stability at Low Temperature (Capacitance Ratio at 120Hz):  $C_{-25°C} / C_{+20°C} \geq 0,7$

Fast Charge-Discharge: **!** Please contact Jianghai for an appropriate choice of the capacitor or possible technical adaptations, esp. for applications like: Welding, Photoflash, Servo motors, X-Ray

ITEM	USEFUL LIFE		LOAD LIFE	ENDURANCE TEST	SHELF LIFE	
Lifetime	9 000h	> 200 000h	5 000h	5 000h	1 000h	
Leakage Current	Not more than specified value		Not more than specified value	Not more than specified value	Not more than specified value	
Capacitance Change	Within ± 30% of initial value		Within ± 20% of initial value	Within ± 10% of initial value	Within ± 20% of initial value	
Dissipation Factor	Not more than 300% of specified value		Not more than 200% of specified value	Not more than 130% of specified value	Not more than 200% of specified value	
Condition:						
Applied Voltage	$U_R$	$U_R$	$U_R$	$U_R$	$U_R = 0$	After test: $U_R$ to be applied for 30 min > 24h before measurement
Applied Current	$I_R$	$1,4 \times I_R$	$I_R$	$I_R = 0$	$I_R = 0$	
Applied Temperature	105°C	50°C	105°C	105°C IEC 60384	105°C	


Terminal and Construction: The terminal version has an impact on the current capability and mechanical behavior (vibration). For high current applications the terminals C,D and E are preferred, see page 139.

**MULTIPLIER FOR RIPPLE CURRENT (FREQUENCY COEFFICIENT)**

Frequency	50Hz	120Hz	300Hz	1kHz	≥ 10 kHz
Coefficient	0,80	1,00	1,10	1,30	1,40

Multipliers for typical operating conditions.

**MULTIPLIER FOR LIFETIME (LIFETIME DIAGRAM)**

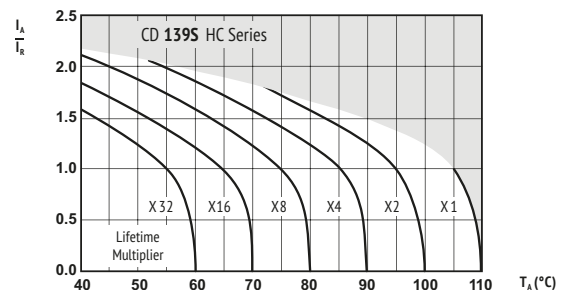

$I_A$  = actual ripple current at 120Hz,  
 $I_R$  = rated ripple current at 120Hz, 105°C  
 Multiplier of Useful Life as a function of ambient temperature & ripple current load

**ENVIRONMENTAL**

The products are RoHS, WEEE and REACH compliant. The detailed version please see separate "Environmental Certificates" document or [www.jianghai-europe.com](http://www.jianghai-europe.com)


**! SAFETY FACTOR**

This diagram includes a safety margin. In many cases the allowed current capability/lifetime may be increased. For details and approvals please contact the Jianghai Europe sales office.





$U_{RDC}$ (Surge Voltage) Code	$C_R$ Rated Capacitance	$ESR_{max}$ Equivalent Series Resistance 20°C 120Hz	$ESR_{typ}$ Equivalent Series Resistance 20°C 120Hz	$\tan\delta$ Dissipation Factor 20°C 120Hz	$I_{leak}$ Leakage Current	$I_{RAC}$ Rated Ripple Current 105°C 120Hz	Size $\varnothing \times L$	ORDER CODE  ◇ = mounting style (stud) △△△△ = terminal style  Details: Page 138
(V)	( $\mu F$ )	(m $\Omega$ )	(m $\Omega$ )		(mA)	(Arms)	(mm)	
<b>350</b> (400) 2V	3 300	55	23	0,15	5,0	14,4	64 x 115	ECG2VHC332M◇D115△△△△
	3 900	46	19	0,15	5,0	16,6	64 x 130	ECG2VHC392M◇D130△△△△
		39	17	0,15	5,0	19,8	64 x 155	ECG2VHC472M◇D155△△△△
	4 700	39	17	0,15	5,0	19,1	77 x 115	ECG2VHC472M◇E115△△△△
		32	14	0,15	5,0	21,9	77 x 130	ECG2VHC562M◇E130△△△△
	6 800	27	12	0,15	5,0	26,2	77 x 155	ECG2VHC682M◇E155△△△△
	8 200	22	11	0,15	5,0	29,3	90 x 157	ECG2VHC822M◇F157△△△△
	10 000	18	10	0,15	5,0	32,3	90 x 157	ECG2VHC103M◇F157△△△△
12 000	15	8	0,15	5,0	39,0	90 x 196	ECG2VHC123M◇F196△△△△	
<b>400</b> (450) 2G	2 700	56	28	0,15	5,0	13,1	64 x 115	ECG2GHC272M◇D115△△△△
	3 300	46	23	0,15	5,0	15,2	64 x 130	ECG2GHC332M◇D130△△△△
		39	21	0,15	5,0	17,9	64 x 155	ECG2GHC392M◇D155△△△△
	3 900	39	21	0,15	5,0	18,2	77 x 115	ECG2GHC392M◇E115△△△△
		32	17	0,15	5,0	20,1	77 x 130	ECG2GHC472M◇E130△△△△
	5 600	27	15	0,15	5,0	23,8	77 x 155	ECG2GHC562M◇E155△△△△
	6 800	22	13	0,15	5,0	26,7	90 x 157	ECG2GHC682M◇F157△△△△
	8 200	18	11	0,15	5,0	29,3	90 x 157	ECG2GHC822M◇F157△△△△
10 000	15	9	0,15	5,0	35,6	90 x 196	ECG2GHC103M◇F196△△△△	
<b>450</b> (500) 2W	2 200	69	38	0,15	5,0	11,8	64 x 115	ECG2WHC222M◇D115△△△△
		56	31	0,15	5,0	13,7	64 x 130	ECG2WHC272M◇D130△△△△
	2 700	56	31	0,15	5,0	14,5	77 x 115	ECG2WHC272M◇E115△△△△
		46	23	0,15	5,0	16,5	64 x 155	ECG2WHC332M◇D155△△△△
	3 300	46	25	0,15	5,0	16,9	77 x 130	ECG2WHC332M◇E130△△△△
		32	18	0,15	5,0	21,7	77 x 155	ECG2WHC472M◇E155△△△△
	4 700	27	16	0,15	5,0	26,4	77 x 195	ECG2WHC562M◇E195△△△△
		27	16	0,15	5,0	24,2	90 x 157	ECG2WHC562M◇F157△△△△
6 800	22	14	0,15	5,0	29,5	90 x 196	ECG2WHC682M◇F196△△△△	
8 200	19	12	0,15	5,0	32,4	90 x 196	ECG2WHC822M◇F196△△△△	

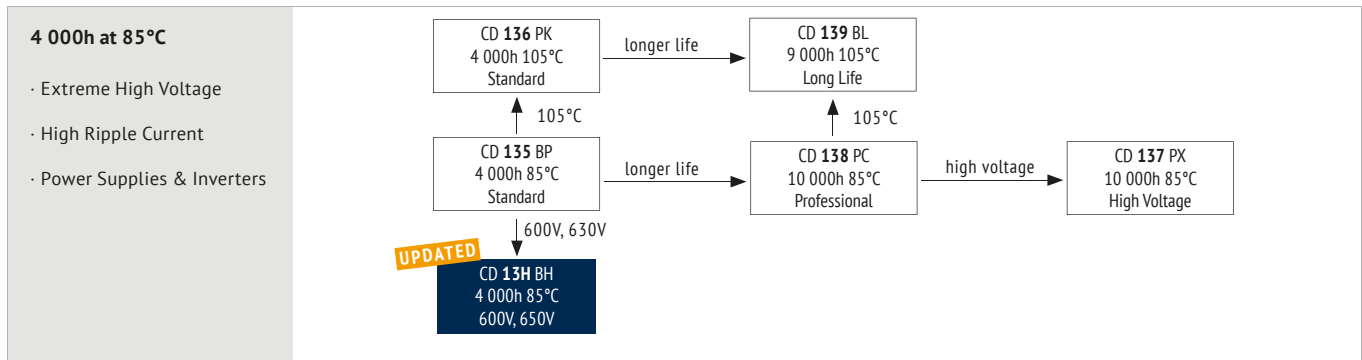

**ITEM CHARACTERISTICS**

Operating Temperature Range (°C)	-25 ~ +85
Voltage Range (V)	600, 650
Capacitance Range (µF)	1 000 ~ 5 600
Capacitance Tolerance (20°C, 120Hz)	± 20%

**!** The usage at lower temperatures than indicated may be possible. Please contact the Jianghai Europe sales office for approval.

Leakage Current: After 5 minutes at 20°C application of rated voltage, leakage current is not more than specified in table.

Fast Charge-Discharge: **!** Please contact Jianghai for an appropriate choice of the capacitor or possible technical adaptations, esp. for applications like: Welding, Photoflash, Servo motors, X-Ray

ITEM	USEFUL LIFE		LOAD LIFE	ENDURANCE TEST	SHELF LIFE	
Lifetime	4 000h	> 65 000h	2 000h	2 000h	500h	
Leakage Current	Not more than specified value		Not more than specified value	Not more than specified value	Not more than specified value	
Capacitance Change	Within ± 30% of initial value		Within ± 20% of initial value	Within ± 10% of initial value	Within ± 20% of initial value	
Dissipation Factor	Not more than 300% of specified value		Not more than 200% of specified value	Not more than 130% of specified value	Not more than 200% of specified value	
Condition: Applied Voltage Applied Current Applied Temperature	$U_R$ $I_R$ 85°C	$U_R$ $1,2 \times I_R$ 40°C	$U_R$ $I_R$ 85°C	$U_R$ $I_R = 0$ 85°C IEC 60384	$U_R = 0$ $I_R = 0$ 85°C	After test: $U_R$ to be applied for 30 min > 24h before measurement

Terminal and Construction: The terminal version has an impact on the current capability and mechanical behavior (vibration). For high current applications the terminals C, D and E are preferred, see page 139.


Optional: Longer Lifetimes available on request (Series CD 13P HP)

**MULTIPLIER FOR RIPPLE CURRENT (FREQUENCY COEFFICIENT)**

Frequency	50Hz	120Hz	300Hz	1kHz	≥ 10 kHz
<b>Coefficient</b>	0,80	1,00	1,10	1,30	1,40

Multipliers for typical operating conditions.

**MULTIPLIER FOR LIFETIME (LIFETIME DIAGRAM)**

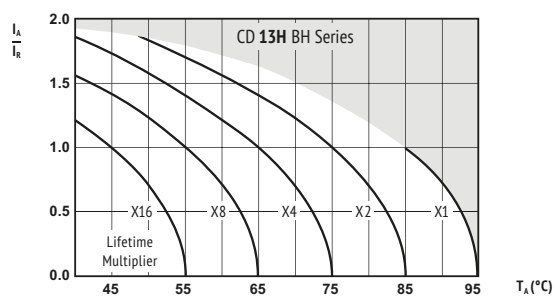

$I_a$  = actual ripple current at 120Hz,  
 $I_r$  = rated ripple current at 120Hz, 85°C  
 Multiplier of Useful Life as a function of ambient temperature & ripple current load

**ENVIRONMENTAL**


The products are RoHS, WEEE and REACH compliant. The detailed version please see separate "Environmental Certificates" document or [www.jianghai-europe.com](http://www.jianghai-europe.com)

**! SAFETY FACTOR**

This diagram includes a safety margin. In many cases the allowed current capability/lifetime may be increased. For details and approvals please contact the Jianghai Europe sales office.

SCREW

<b>U<sub>RDC</sub></b> (Surge Voltage) Code	<b>C<sub>R</sub></b> Rated Capacitance	<b>ESR<sub>max</sub></b> Equivalent Series Resistance 20°C 120Hz	<b>ESR<sub>typ</sub></b> Equivalent Series Resistance 20°C 120Hz	<b>tanδ</b> Dissipation Factor 20°C 120Hz	<b>I<sub>leak</sub></b> Leakage Current	<b>I<sub>RAC</sub></b> Rated Ripple Current 85°C 120Hz	<b>Size</b> øD x L	<b>ORDER CODE</b> ◇ = mounting style (stud) △△△△ = terminal style  Details: Page 138
(V)	(μF)	(mΩ)	(mΩ)		(mA)	(Arms)	(mm)	
<b>600</b> <b>(650)</b> <b>25</b>	1 200	242	121	0,25	5,0	7,7	64 x 96	ECG2SBH122M◇D096△△△△
	1 500	224	112	0,25	5,0	9,3	64 x 115	ECG2SBH152M◇D115△△△△
	1 800	194	97	0,25	5,0	10,1	77 x 96	ECG2SBH182M◇E096△△△△
	2 200	162	81	0,25	5,0	12,0	77 x 115	ECG2SBH222M◇E115△△△△
	2 700	132	66	0,25	5,0	14,0	77 x 130	ECG2SBH272M◇E130△△△△
	3 300	88	44	0,25	5,0	16,4	77 x 155	ECG2SBH332M◇E155△△△△
		88	44	0,25	5,0	16,4	90 x 131	ECG2SBH332M◇F131△△△△
	3 900	74	37	0,25	5,0	17,8	90 x 131	ECG2SBH392M◇F131△△△△
	4 700	62	31	0,25	5,0	21,0	90 x 157	ECG2SBH472M◇F157△△△△
	5 600	56	28	0,25	5,0	24,5	90 x 196	ECG2SBH562M◇F196△△△△
<b>650</b> <b>(700)</b> <b>S6</b>	1 000	300	150	0,30	5,0	6,0	64 x 130	ECGS6BH102M◇D130△△△△
	1 200	266	133	0,30	5,0	6,7	77 x 115	ECGS6BH122M◇E115△△△△
	1 500	212	106	0,30	5,0	8,1	77 x 130	ECGS6BH152M◇E130△△△△
	1 800	176	88	0,30	5,0	9,8	77 x 155	ECGS6BH182M◇E155△△△△
	2 200	144	72	0,30	5,0	10,7	90 x 131	ECGS6BH222M◇F131△△△△
	2 700	128	64	0,30	5,0	12,8	90 x 157	ECGS6BH272M◇F157△△△△
	3 300	106	53	0,30	5,0	14,7	90 x 171	ECGS6BH332M◇F171△△△△
	3 900	94	47	0,30	5,0	17,9	90 x 196	ECGS6BH392M◇F196△△△△
	4 700	78	39	0,30	5,0	21,6	90 x 196	ECGS6BH472M◇F196△△△△
	5 600	70	35	0,30	5,0	24,9	101 x 220	ECGS6BH562M◇G220△△△△

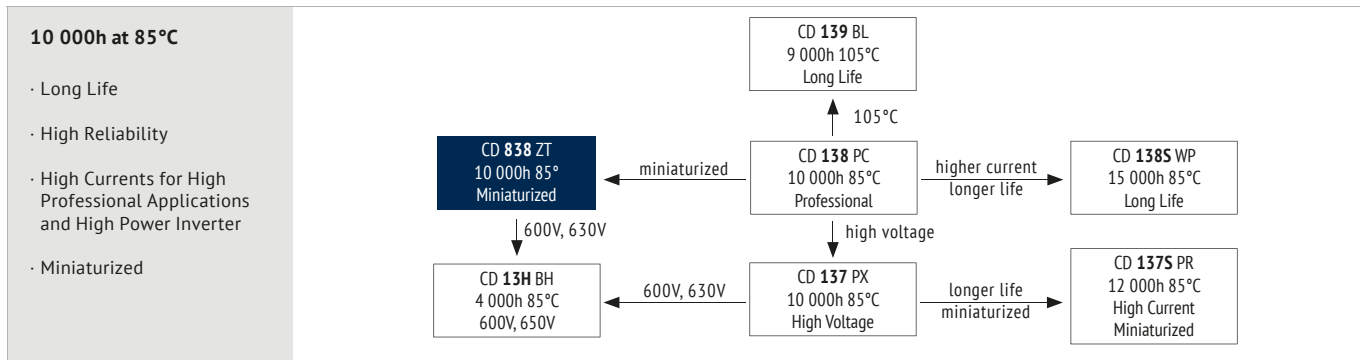

ITEM CHARACTERISTICS

Operating Temperature Range (°C)	-40 ~ +85
Voltage Range (V)	350 ~ 450
Capacitance Range (µF)	470 ~ 15 000
Capacitance Tolerance (20°C, 120Hz)	± 20%

**!** The usage at lower temperatures than indicated may be possible. Please contact the Jianghai Europe sales office for approval.

Leakage Current After 5 minutes at 20°C application of rated voltage, leakage current is not more than specified in table.

Stability at Low Temperature (Capacitance Ratio at 120Hz)  $C_{-25°C} / C_{+20°C} \geq 0,7$

Fast Charge-Discharge **!** Please contact Jianghai for an appropriate choice of the capacitor or possible technical adaptations, esp. for applications like: Welding, Photoflash, Servo motors, X-Ray

ITEM USEFUL LIFE LOAD LIFE ENDURANCE TEST SHELF LIFE

Lifetime	10 000h	> 100 000h	5 000h	5 000h	1 000h
Leakage Current	Not more than specified value		Not more than specified value	Not more than specified value	Not more than specified value
Capacitance Change	Within ± 30% of initial value		Within ± 20% of initial value	Within ± 10% of initial value	Within ± 20% of initial value
Dissipation Factor	Not more than 300% of specified value		Not more than 200% of specified value	Not more than 130% of specified value	Not more than 200% of specified value
Condition:	$U_R$	$U_R$	$U_R$	$U_R$	$U_R = 0$
Applied Voltage	$I_R$	$1,4 \times I_R$	$I_R$	$I_R = 0$	$I_R = 0$
Applied Current	85°C	40°C	85°C	85°C	85°C
Applied Temperature				IEC 60384	After test: $U_R$ to be applied for 30 min > 24h before measurement

Terminal and Construction The terminal version has an impact on the current capability and mechanical behavior (vibration). For high current applications the terminals C,D and E are preferred, see page 139.


Optional Self-extinguishing Electrolyte on request

MULTIPLIER FOR RIPPLE CURRENT (FREQUENCY COEFFICIENT)

Frequency	50Hz	120Hz	300Hz	1kHz	≥ 10 kHz
Coefficient	0,80	1,00	1,10	1,30	1,40

Multipliers for typical operating conditions.

MULTIPLIER FOR LIFETIME (LIFETIME DIAGRAM)

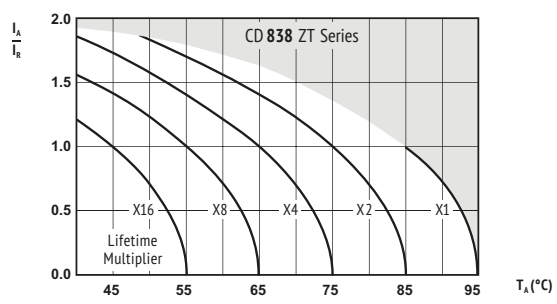

$I_A$  = actual ripple current at 120Hz,  $I_R$  = rated ripple current at 120Hz, 85°C  
Multiplier of Useful Life as a function of ambient temperature & ripple current load

ENVIRONMENTAL

The products are RoHS, WEEE and REACH compliant. The detailed version please see separate "Environmental Certificates" document or www.jianghai-europe.com

**!** SAFETY FACTOR

This diagram includes a safety margin. In many cases the allowed current capability/lifetime may be increased. For details and approvals please contact the Jianghai Europe sales office.

SCREW



U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 85°C 120Hz	Size øD x L	ORDER CODE ◇ = mounting style (stud) △△△ = terminal style
(V)	(µF)	(mΩ)	(mΩ)		(mA)	(Arms)	(mm)	Details: Page 138

350 (400) 2V	1 000	199	120	0,15	3,5	5,6	51 x 80	ECG2VZT102M◇C080△△△△
	1 500	133	55	0,15	5,0	8,5	64 x 105	ECG2VZT152M◇D105△△△△
	2 200	91	30	0,15	5,0	9,1	51 x 96	ECG2VZT222M◇C096△△△△
		91	30	0,15	5,0	9,4	64 x 105	ECG2VZT222M◇D105△△△△
	3 300	61	23	0,15	5,0	13,0	64 x 130	ECG2VZT332M◇D130△△△△
		61	23	0,15	5,0	11,0	77 x 105	ECG2VZT332M◇E105△△△△
	4 700	43	16	0,15	5,0	14,0	77 x 105	ECG2VZT472M◇E105△△△△
		43	16	0,15	5,0	18,0	77 x 143	ECG2VZT472M◇E143△△△△
	6 800	30	13	0,15	5,0	20,0	77 x 143	ECG2VZT682M◇E143△△△△
		20	10	0,15	5,0	21,4	77 x 143	ECG2VZT103M◇E143△△△△
	10 000	20	10	0,15	5,0	27,0	77 x 220	ECG2VZT103M◇E220△△△△
		20	9	0,15	5,0	20,5	90 x 105	ECG2VZT103M◇F105△△△△
15 000	14	10	0,15	5,0	24,9	77 x 145	ECG2VZT153M◇E145△△△△	
	14	6	0,15	5,0	35,0	90 x 220	ECG2VZT153M◇F220△△△△	
18 000	12	6	0,15	5,0	28,7	77 x 220	ECG2VZT183M◇E222△△△△	

400 (450) 2G	1 000	199	82	0,15	4,0	5,0	51 x 80	ECG2GZT102M◇C080△△△△
	1 500	133	50	0,15	5,0	6,7	51 x 80	ECG2GZT152M◇C080△△△△
	2 200	91	28	0,15	5,0	8,0	51 x 105	ECG2GZT222M◇C105△△△△
		91	28	0,15	5,0	9,2	64 x 96	ECG2GZT222M◇D096△△△△
	3 300	91	28	0,15	5,0	9,5	64 x 105	ECG2GZT222M◇D105△△△△
		91	28	0,15	5,0	10,0	77 x 105	ECG2GZT222M◇E105△△△△
	3 300	61	21	0,15	5,0	12,2	64 x 105	ECG2GZT332M◇D105△△△△
		61	21	0,15	5,0	14,5	64 x 115	ECG2GZT332M◇D115△△△△
		61	21	0,15	5,0	11,8	77 x 100	ECG2GZT332M◇E100△△△△
		61	21	0,15	5,0	13,5	77 x 105	ECG2GZT332M◇E105△△△△
	3 900	61	21	0,15	5,0	15,0	77 x 143	ECG2GZT332M◇E143△△△△
		52	19	0,15	5,0	20,7	77 x 121	ECG2GZT392M◇E121△△△△
4 700	43	15	0,15	5,0	14,5	77 x 105	ECG2GZT472M◇E105△△△△	
	43	15	0,15	5,0	18,4	77 x 143	ECG2GZT472M◇E143△△△△	
5 600	36	14	0,15	5,0	21,0	77 x 116	ECG2GZT562M◇E116△△△△	
	36	18	0,15	5,0	19,0	90 x 105	ECG2GZT562M◇F105△△△△	
6 800	30	13	0,15	5,0	19,4	77 x 143	ECG2GZT682M◇E143△△△△	
	30	13	0,15	5,0	29,0	90 x 145	ECG2GZT682M◇F145△△△△	
8 200	25	12	0,15	5,0	20,0	77 x 143	ECG2GZT822M◇E143△△△△	
	25	12	0,15	5,0	25,0	77 x 170	ECG2GZT822M◇E170△△△△	
10 000	20	10	0,15	5,0	17,8	77 x 143	ECG2GZT103M◇E143△△△△	
	20	10	0,15	5,0	26,0	77 x 195	ECG2GZT103M◇E195△△△△	
	20	10	0,15	5,0	26,7	77 x 220	ECG2GZT103M◇E220△△△△	
12 000	20	10	0,15	5,0	35,7	90 x 220	ECG2GZT103M◇F220△△△△	
12 000	17	8	0,15	5,0	31,0	77 x 220	ECG2GZT123M◇E220△△△△	
15 000	14	6	0,15	5,0	36,0	90 x 220	ECG2GZT153M◇F220△△△△	
18 000	9	5	0,15	5,0	38,5	90 x 196	ECG2GZT183M◇F196△△△△	

420 (470) 2X	3 300	61	21	0,15	5,0	12,4	64 x 105	ECG2XZT332M◇D105△△△△
		61	21	0,15	5,0	14,5	64 x 115	ECG2XZT332M◇D115△△△△
		61	21	0,15	5,0	13,5	77 x 105	ECG2XZT332M◇E105△△△△
	3 900	52	19	0,15	5,0	20,7	77 x 121	ECG2XZT392M◇E121△△△△
	4 700	43	16	0,15	5,0	18,0	77 x 105	ECG2XZT472M◇E105△△△△
		43	16	0,15	5,0	18,0	77 x 143	ECG2XZT472M◇E143△△△△
10 000	20	10	0,15	5,0	28,0	77 x 220	ECG2XZT103M◇E220△△△△	

U <sub>RDC</sub> (Surge Voltage) Code	C <sub>R</sub> Rated Capacitance	ESR <sub>max</sub> Equivalent Series Resistance 20°C 120Hz	ESR <sub>typ</sub> Equivalent Series Resistance 20°C 120Hz	tanδ Dissipation Factor 20°C 120Hz	I <sub>leak</sub> Leakage Current	I <sub>RAC</sub> Rated Ripple Current 85°C 120Hz	Size øD x L	ORDER CODE ◇ = mounting style (stud) △△△ = terminal style
(V)	(µF)	(mΩ)	(mΩ)		(mA)	(Arms)	(mm)	Details: Page 138

450 (500) 2W	470	424	250	0,15	2,1	4,5	51 x 75	ECG2WZT471M◇C075△△△△
	680	293	185	0,15	3,1	4,9	51 x 80	ECG2WZT681M◇C080△△△△
	1 000	199	93	0,15	4,5	6,4	51 x 105	ECG2WZT102M◇C105△△△△
		133	56	0,15	5,0	7,1	51 x 105	ECG2WZT152M◇C105△△△△
	1 500	133	56	0,15	5,0	10,0	51 x 115	ECG2WZT152M◇C115△△△△
		111	45	0,15	5,0	8,5	64 x 105	ECG2WZT182M◇D105△△△△
	1 800	91	35	0,15	5,0	9,0	64 x 96	ECG2WZT222M◇D096△△△△
		91	35	0,15	5,0	12,0	64 x 130	ECG2WZT222M◇D130△△△△
	2 200	91	35	0,15	5,0	13,1	77 x 143	ECG2WZT222M◇E143△△△△
		74	30	0,15	5,0	12,7	64 x 130	ECG2WZT272M◇D130△△△△
	2 700	61	30	0,15	5,0	14,0	64 x 130	ECG2WZT332M◇D130△△△△
		61	30	0,15	5,0	13,2	77 x 105	ECG2WZT332M◇E105△△△△
61		30	0,15	5,0	13,8	77 x 115	ECG2WZT332M◇E115△△△△	
61		30	0,15	5,0	16,1	77 x 143	ECG2WZT332M◇E143△△△△	
3 900	52	20	0,15	5,0	13,3	64 x 140	ECG2WZT392M◇D140△△△△	
	43	16	0,15	5,0	14,0	64 x 143	ECG2WZT472M◇D143△△△△	
4 700	43	16	0,15	5,0	17,0	64 x 195	ECG2WZT472M◇D195△△△△	
	43	16	0,15	5,0	15,0	77 x 115	ECG2WZT472M◇E115△△△△	
	43	16	0,15	5,0	21,0	77 x 143	ECG2WZT472M◇E143△△△△	
	43	16	0,15	5,0	21,0	77 x 143	ECG2WZT472M◇E143△△△△	
5 600	36	13	0,15	5,0	16,0	77 x 130	ECG2WZT562M◇E130△△△△	
	36	13	0,15	5,0	17,5	77 x 143	ECG2WZT562M◇E143△△△△	
6 800	30	11	0,15	5,0	18,0	77 x 143	ECG2WZT682M◇E143△△△△	
	30	11	0,15	5,0	19,1	77 x 155	ECG2WZT682M◇E155△△△△	
	30	11	0,15	5,0	21,0	77 x 220	ECG2WZT682M◇E220△△△△	
8 200	30	11	0,15	5,0	20,0	90 x 145	ECG2WZT682M◇F145△△△△	
	25	12	0,15	5,0	28,2	77 x 170	ECG2WZT822M◇E170△△△△	
10 000	25	12	0,15	5,0	28,5	90 x 157	ECG2WZT822M◇F157△△△△	
	20	9	0,15	5,0	26,0	77 x 220	ECG2WZT103M◇E220△△△△	
12 000	20	9	0,15	5,0	28,0	90 x 171	ECG2WZT103M◇F171△△△△	
	17	8	0,15	5,0	33,0	90 x 170	ECG2WZT123M◇F170△△△△	
15 000	17	8	0,15	5,0	34,0	90 x 220	ECG2WZT123M◇F220△△△△	
	14	7	0,15	5,0	34,0	90 x 220	ECG2WZT153M◇F220△△△△	
18 000	14	6	0,15	5,0	36,0	90 x 236	ECG2WZT153M◇F236△△△△	
22 000	14	9	0,15	5,0	36,5	90 x 180	ECG2WZT183M◇F180△△△△	
	9,1	6	0,15	5,0	21,0	90 x 236	ECG2WZT223M◇F236△△△△	

500V capacitors available on request.

SCREW





## CAPACITOR COMPETENCE

*since 1958*

### JIANGHAI EUROPE

Electronic Components GmbH



ENGINEERED SOLUTIONS

#### **Jianghai Europe Electronic Components GmbH**

Uerdinger Str. 125 · 47799 Krefeld/Germany

Tel.: +49 (0) 2151-652088-0 · Fax: -88

info@jianghai-europe.com

www.jianghai-europe.com

#### **Nantong Jianghai Capacitor Co., Ltd.**

No. 79 South Tong Yang Road

226361 Nantong, Jiangsu/China

Tel.: +86-513-8672-6080 · Fax: -3859

jh@jianghai.com

www.jianghai.com

#### **Jianghai America Inc.**

3104 Sunrise Ridge LN

Hacienda Heights, CA 91745/USA

Tel.: +1-626-274-1692 · Fax: +1-626-336-6960

wangjuan@jianghai-america.com

www.jianghai-america.com

